




Building and Construction Insulation Tapes

Strong, Rugged, and Durable

High Performance Adhesives

Designed for Wide Temperature Ranges



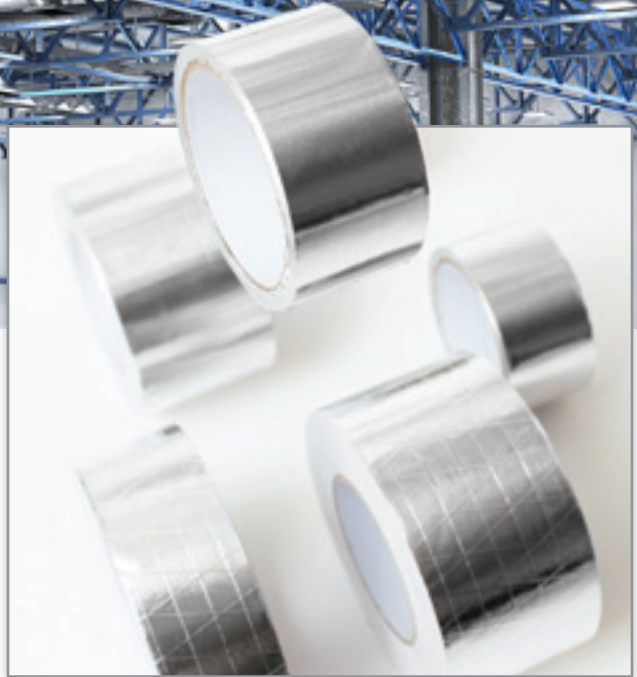










Building and Construction Insulation Tapes
















Contractors and builders only have one hard and fast rule: Get the job done right the first time. Which is why ECHOtape's specialty tapes exceed the highest standards for reliability, precision and superior results. So, no matter the task at-hand, you can leave your mark of excellence at every job site. From air sealing to patching, bonding or seaming our full line of tapes are designed for insulation applications for today's construction professionals.















Using breakthrough technology, our exclusively formulated acrylic adhesives are engineered to meet

the rigid requirements of contractors and builders working on residential and commercial buildings. Whether you're working in extreme weather conditions or simply need maximum performance, our specialty tapes combine exceptionally high shear strength with both high tack and cold weather properties, ensuring a secure, weather tight seal in virtually any environmental condition.

When the quality of work relies on the ability to produce an airtight, weather proof bond, you can count on ECHOtape to be reliable, roll after roll.

PRODUCT/APPLICATION	SIZE(S)	TECHNICAL SPECS	FEATURES
DC-M155A All Weather Double Sided Polyester Tape Use for lap seals on laminated insulation and reflective insulation	1.41 in x 60 yd 36 mm x 55 m 1.41 in x 360 yd 36 mm x 329 m 1.89 in x 60 yd 48 mm x 55 m	STEEL ADHESION 40 oz./in TOTAL THICKNESS 3.6 mil SERVICE TEMPERATURE -40°F to 176°F -40°C to 80°C	
DC-M167A All Weather Double Sided Polyester Tape Use for lap seals on laminated insulation and reflective insulation	1.41 in x 60 yd 36 mm x 55 m 1.89 in x 60 yd 48 mm x 55 m	STEEL ADHESION 90 oz./in TOTAL THICKNESS 6 mil SERVICE TEMPERATURE -40°F to 300°F -40°C to 150°C	
DC-R129A All Weather Double Sided Transfer Tape Use for lap seals on laminated insulation and reflective insulation	1.41 in x 60 yd 36 mm x 55 m 1.89 in x 60 yd 48 mm x 55 m	STEEL ADHESION 90 oz./in TOTAL THICKNESS 4 mil SERVICE TEMPERATURE -40°F to 176°F -40°C to 80°C	
FO-V2344/FO-V2348 Single Sided Thermal Break Tape Use to reduce thermal bridging on outer and inner framing in metal buildings	1/4 in x 2 in x 50 ft 1/4 in x 3 in x 50 ft 1/8 in x 2 in x 75 ft 1/8 in x 3 in x 75 ft	STEEL ADHESION 20 oz./in TOTAL THICKNESS 1/4 in 1/8 in SERVICE TEMPERATURE -20°F to 130°F -29°C to 54°C	
FS-G7731 All Weather Lamtec WMP®-VR Facing Tape Use as a vapor seal or patch tape for Lamtec WMP®-VR faced insulation Colors: white or black	1.89 in x 50 yd 48 mm x 45,72 m 2.83 in x 50 yd 72 mm x 45,72 m 5.67 in x 50 yd 144 mm x 45,72 m	STEEL ADHESION 40 oz./in TOTAL THICKNESS 8.5 mil SERVICE TEMPERATURE -40°F to 176°F -40°C to 80°C	 
FS-G7732 All Weather Lamtec WMP®-VR-R Plus Facing Tape Use as a vapor seal or patch tape for Lamtec WMP®-VR-R Plus faced insulation Colors: white or black	1.89 in x 50 yd 48 mm x 45,72 m 2.83 in x 50 yd 72 mm x 45,72 m 5.67 in x 50 yd 144 mm x 45,72 m	STEEL ADHESION 40 oz./in TOTAL THICKNESS 8.5 mil SERVICE TEMPERATURE -40°F to 176°F -40°C to 80°C	 
FS-G7735 All Weather Lamtec WMP®-10 Facing Tape Use as a vapor seal or patch tape for Lamtec WMP®-10 faced insulation Colors: white or black	1.89 in x 50 yd 48 mm x 45,72 m 2.83 in x 50 yd 72 mm x 45,72 m 5.67 in x 50 yd 144 mm x 45,72 m	STEEL ADHESION 40 oz./in TOTAL THICKNESS 8.5 mil SERVICE TEMPERATURE -40°F to 176°F -40°C to 80°C	 

PRODUCT/APPLICATION	SIZE(S)	TECHNICAL SPECS	FEATURES
<p>NEW FS-G7736 All Weather White Lamtec WMP®-50 Facing Tape Use as a vapor seal or patch tape for Lamtec WMP®-50 faced insulation</p>	2.83 in x 50 yd 72 mm x 45,72 m	<p>STEEL ADHESION 40 oz./in</p> <p>TOTAL THICKNESS 8.5 mil</p> <p>SERVICE TEMPERATURE -40°F to 176°F -40°C to 80°C</p>	 
<p>FS-G7739 All Weather EHP-VR-R Plus Facing Tape Use as a vapor seal or patch tape for EHP-VR-R Plus faced insulation</p>	2.83 in x 50 yd 72 mm x 45,72 m	<p>STEEL ADHESION 40 oz./in</p> <p>TOTAL THICKNESS 8.5 mil</p> <p>SERVICE TEMPERATURE -40°F to 176°F -40°C to 80°C</p>	 
<p>FS-G7747 All Weather Alpha-VR-R Plus Facing Tape Use as a vapor seal or patch tape for ALPHA-VR-R Plus faced insulation</p>	2.83 in x 50 yd 72 mm x 45,72 m	<p>STEEL ADHESION 40 oz./in</p> <p>TOTAL THICKNESS 8.5 mil</p> <p>SERVICE TEMPERATURE -40°F to 176°F -40°C to 80°C</p>	 
<p>NEW FS-G7748 All Weather Lamtec WMP®-UV-HD Facing Tape Use as a vapor seal or patch tape for Lamtec WMP®-UV-HD faced insulation</p>	2.83 in x 50 yd 72 mm x 45,72 m	<p>STEEL ADHESION 40 oz./in</p> <p>TOTAL THICKNESS 11 mil</p> <p>SERVICE TEMPERATURE -40°F to 176°F -40°C to 80°C</p>	 
<p>NEW FS-G7749 All Weather Lamtec® Gymguard Facing Tape Use as a vapor seal or patch tape for Lamtec® Gymguard faced insulation</p>	2.83 in x 50 yd 72 mm x 45,72 m	<p>STEEL ADHESION 40 oz./in</p> <p>TOTAL THICKNESS 8.6 mil</p> <p>SERVICE TEMPERATURE -40°F to 176°F -40°C to 80°C</p>	 
<p>NEW FS-G7750 All Weather Lamtec® Arenashield Facing Tape Use as a vapor seal or patch tape for Lamtec® Arenashield faced insulation</p>	2.83 in x 50 yd 72 mm x 45,72 m	<p>STEEL ADHESION 40 oz./in</p> <p>TOTAL THICKNESS 7.5 mil</p> <p>SERVICE TEMPERATURE -40°F to 176°F -40°C to 80°C</p>	 
<p>FS-J7744/FS-J7754 All Weather ASJ Facing Tape Use as a vapor seal for all service jacketing (ASJ) duct board and pipe insulation Facing: Available in Kraft (FS-J7744) or White Poly Film (FS-J7754)</p>	2.83 in x 50 yd 72 mm x 45,72 m	<p>STEEL ADHESION 60 oz./in</p> <p>TOTAL THICKNESS 10 mil</p> <p>SERVICE TEMPERATURE -20°F to 176°F -29°C to 80°C</p>	  

PRODUCT/APPLICATION	SIZE(S)	TECHNICAL SPECS	FEATURES
FS-K7751 All Weather FSK Facing Tape Use as a vapor seal for FSK jacketed insulation products	1.89 in x 50 yd 48 mm x 45,72 m 2.83 in x 50 yd 72 mm x 45,72 m 3.78 in x 50 yd 96 mm x 45,72 m 4.72 in x 50 yd 120 mm x 45,72 m	STEEL ADHESION 60 oz./in TOTAL THICKNESS 5.5 mil SERVICE TEMPERATURE -20°F to 176°F -29°C to 80°C	  
MT-A7717 All Weather Aluminum Foil Tape Use as a sealing tape for foil faced insulation	1.89 in x 50 yd 48 mm x 45,72 m 2.36 in x 50 yd 60 mm x 45,72 m 2.83 in x 50 yd 72 mm x 45,72 m 3.78 in x 50 yd 96 mm x 45,72 m	STEEL ADHESION 60 oz./in TOTAL THICKNESS 3.2 mil SERVICE TEMPERATURE -31°F to 248°F -35°C to 120°C	  
MT-A7727 All Weather Aluminum Foil Tape Use as a sealing tape for foil faced insulation	1.89 in x 50 yd 48 mm x 45,72 m 2.83 in x 50 yd 72 mm x 45,72 m	STEEL ADHESION 60 oz./in TOTAL THICKNESS 3.6 mil SERVICE TEMPERATURE -31°F to 248°F -35°C to 120°C	  
MT-A7729 All Weather White Aluminum Foil Tape Use as a vapor seal for white faced foiled insulation	2.83 in x 50 yd 72 mm x 45,72 m	STEEL ADHESION 60 oz./in TOTAL THICKNESS 3.6 mil SERVICE TEMPERATURE -31°F to 248°F -35°C to 120°C	  
NEW PE-M4535 Premium Construction Seaming Tape Use to seam and seal housewrap, insulated sheathing products and polyethylene vapor barriers Colors: white, silver and red	1.89 in x 54.6 yd 48 mm x 50 m	STEEL ADHESION 60 oz./in TOTAL THICKNESS 3.38 mil SERVICE TEMPERATURE -40°F to 148°F -40°C to 120°C	 
VI-V6460 Embossed Vinyl Seaming & Patch Tape Use as a vapor seal for white vinyl faced insulation	2.83 in x 50 yd 72 mm x 45,72 m	STEEL ADHESION 60 oz./in TOTAL THICKNESS 5 mil SERVICE TEMPERATURE -40°F to 190°F -40°C to 91°C	



LEGEND

 Mold Resistant

 Cold Weather Application Temperatures

 UL Classified



ECHOtape™



Contact us today.

+1 800.461.8273
info@echotape.com
echotape.com

USA

5645 Daniels Street
Chino, CA 91710

Canada

9001 Avon, Suite #100
Montreal, QC H4X 2G8