



**ANY JOB.
ANY SIZE.
ANY PLACE.**

55 Years of American Ingenuity

GV230

**IMPROVED
FOR YOUR
COMFORT**

Industry's first belt driven vacuum with an increased 30% impeller speed, that out performs other direct drive vacuums. The **GV230 Belt Driven Gas Vacuum** is powered by a rugged 23 hp Briggs and Stratton V-Twin gas engine or a 22.1 hp Honda engine V-Twin. This vacuum removes all types of blown insulation and is used for recycling damp spray.

- 6" (15.2 cm) inlet and outlet allows for substantial volume
- Engineered and designed to eliminate engine vibration and fan blade stress
- 12 volt Magnetron® Electronic Ignition system
- Input / Output safety switches
- Ergonomic mounting frame w/11" run flat tires
- Abrasion resistant steel fan chamber
- Durable powder coat finish
- Ergonomic handle when base design allows for easy tilting and moving

PRODUCTION RATE

***EXTRACTS AN AVERAGE
300/BAGS per hr.**



Backed by a manufacturer's
2-YEAR WARRANTY - Made in the U.S.A.



KRENDL

The Innovator in Insulation Equipment™

GV230

Scan to learn more about Krendl Machine

GAS VACUUM - THEORY OF OPERATION

This unit is designed to accept all recycled fiber materials from the job site and deliver them directly into the vacuum hopper. Once the recycled material has been deposited into the hopper, the air passes through the perforated mesh screen in the vacuum hopper, where it is filtered, and exhausted.

FEATURES:

Automatic shut-off, if the hose detaches during operation. Hour meter.

* Briggs engine features a tachometer

VACUUM SPECIFICATIONS

FAN SIZE / TYPE **STEEL, 18" (46 cm)**

PRODUCTION **9000 lbs./hr (4082 kg./hr)**


INLET / OUTLET **6" (15.2 cm)**
inches (cm)

GENERAL SPECIFICATIONS

DIMENSIONS **46" long x 29 1/2" wide x 51" high**

WEIGHT **331 lbs. (150 kg.)**

MOTOR **Briggs & Stratton 627cc
23 hp/3600rpm (no load)
or Honda 688 cc
22.1 hp/3600rpm (no load)**

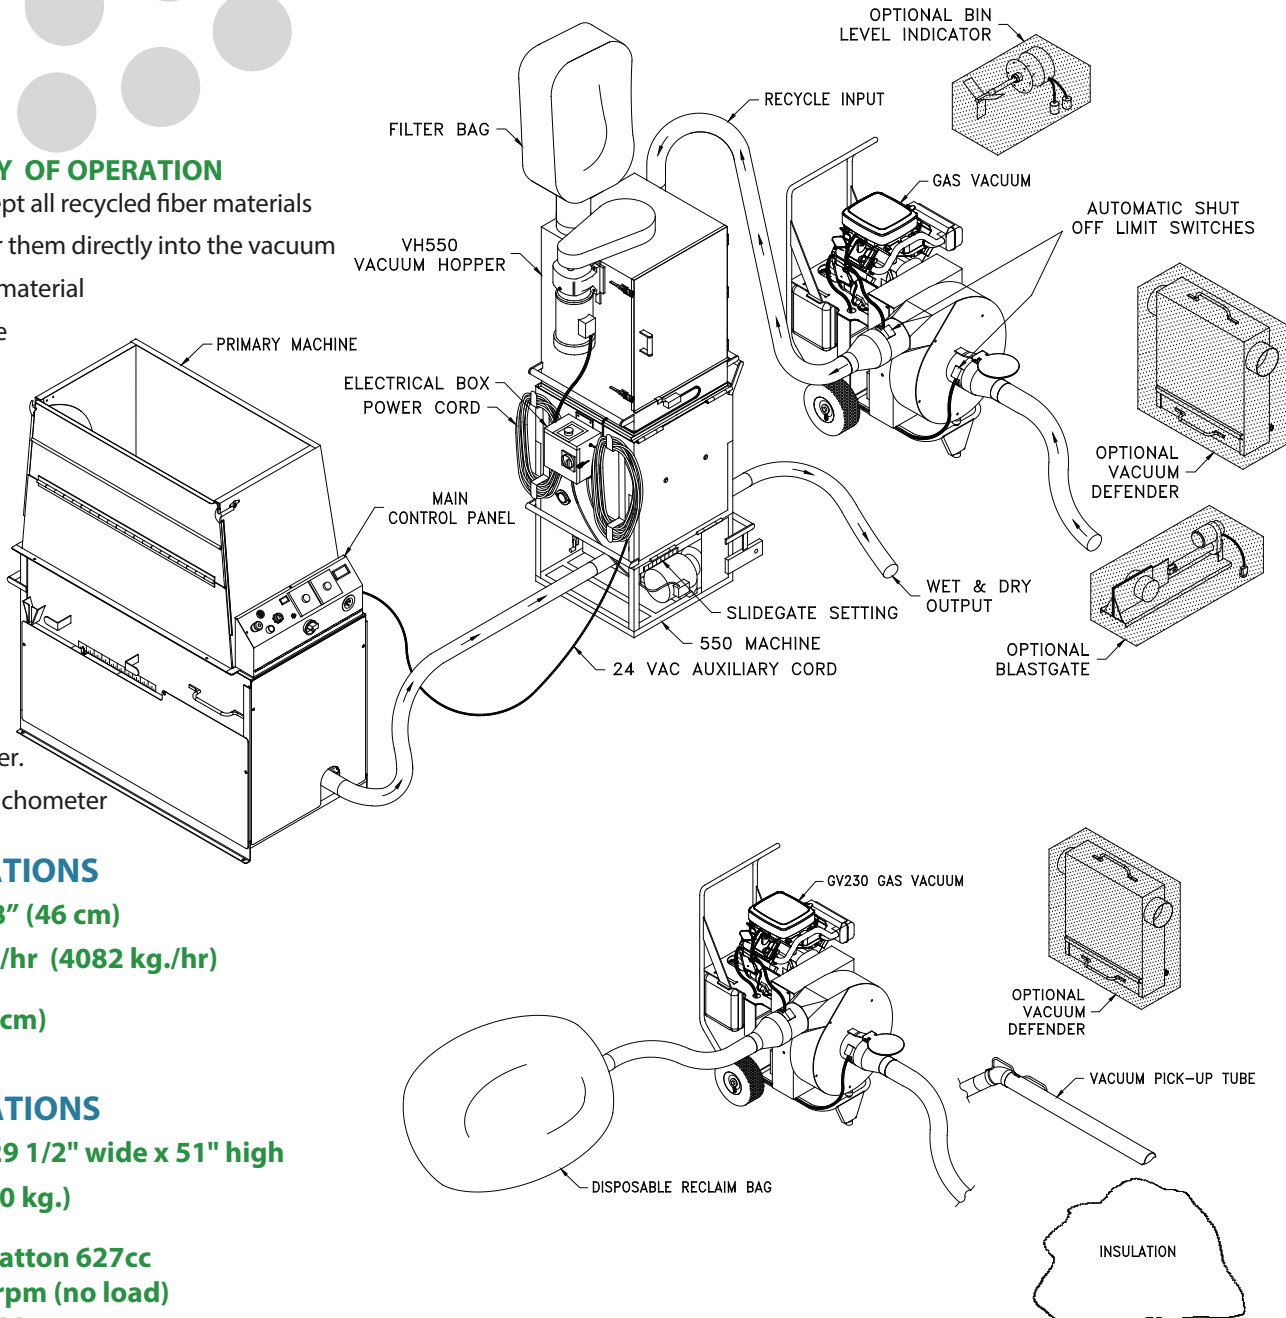

Waste material can be discharged into a disposable reclaim bag.