

# TABLE OF CONTENTS

## 1. WELD PINS

Capacitor Discharge .....	1-1
Power Tip .....	1-2
Sure Fire .....	1-3
Conical Tip .....	1-4
Double Pointed .....	1-5
J-Hook .....	1-6

## 2. CUP HEAD WELD PINS

Cup Head Weld Pins (CD) .....	2-1
Cup Head Pin (Duro Dyne Style) .....	2-2

## 3. WASHERS, CAPS & NUTS

Self-Locking Washers (Square) .....	3-1
Self-Locking Washers (Round) .....	3-2
Capped Speed Washer .....	3-3
Lacing Washer .....	3-3
Lacing Ring .....	3-3
Annular Ring Cap .....	3-4
Keyhole Slotted Washer .....	3-4
Annular Groove Cap .....	3-5
Cap Setting Tool .....	3-5
Panel Nut .....	3-5
Combination Nut .....	3-6

## 4. INSULATION HANGERS

Spindle .....	4-1
Self-Stick .....	4-2
Self-Stick Guidelines .....	4-3
Nylon .....	4-4
Annular Ring Anchor Bolt .....	4-5
Threaded Anchor Bolt .....	4-6
Safing "Z" Clip .....	4-7

## 5. ADHESIVES

IHA-177 General Purpose .....	5-1
Directions For Use .....	5-2
Cautionary Information .....	5-3

## 6. LACING ANCHORS

Lacing Anchors .....	6-1
Slim Lacing Anchors .....	6-1S
Quilting Pins .....	6-2
Lacing Hook .....	6-3
L100 Lacing Washer .....	6-3
Lacing Ring .....	6-3

## 7. C.D. STUDS

General Specifications .....	7-1
Capacitor Discharge Welding Process .....	7-2
CD Stud/Base Metal Combination Welding Capabilities .....	7-3
CD Stud Reverse Side Marking Limitations .....	7-4
CD Stud Weld Inspection .....	7-5
CD Stud Load Strengths .....	7-6
CD Studs Weight Charts .....	7-7
Flanged Annular Ring (Navy) .....	7-8
Mushroom Cap/Ann.Ring (MCAL) .....	7-8
Flanged (Threaded) .....	7-9
Flanged/Metric (Threaded) .....	7-9M
Small Flanged (Threaded) .....	7-10
Non Flanged (Threaded) .....	7-11
Flanged (No Thread) .....	7-12
Small Flanged (No Thread) .....	7-13
Non Flanged (No Thread) .....	7-14
Drawn Arc (Threaded) .....	7-15
Drawn Arc (No Thread) .....	7-16
Bi-Metallic Studs - Pin .....	7-17
Bi-Metallic Studs - Annular Ring .....	7-17
Bi-Metallic Studs - Notched End .....	7-17
Flanged Accoustical Hanger (Lagging) .....	7-18
Special CD Studs .....	7-19



450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)

## TABLE OF CONTENTS (Continued)

### 8. ARC STUDS

Arc Stud Welding Process .....	8-1
Welded Steel Arc Studs Tensile .....	8-2
Torque Strengths .....	8-3
Arc Stud Weld Fillet Accommodation .....	8-4
Arc Stud Location Template & Bushing	
Design .....	8-5
Arc Stud Weld Inspection .....	8-6
Arc Stud Welding Recommendation	
Minimum Base Metal Thickness .....	8-7
Arc Stud Weight Charts .....	8-8
Standard Thread .....	8-9
Full Thread .....	8-10
Full Base .....	8-11
Long Reduced Base .....	8-12
Short Reduced Base .....	8-13
No Thread .....	8-14
Bent No Thread .....	8-15
Tapped - Full Base .....	8-16
Tapped - Reduced Base .....	8-17
Shoulder - Threaded .....	8-18
Shoulder - Annular Groove .....	8-19
Shoulder - No Thread .....	8-20
Collar .....	8-21
Bent Collar .....	8-22
Annular Ring (Navy) .....	8-23
Rectangular - Plain .....	8-24
Rectangular - "T" Slotted .....	8-25
Rectangular - With Hole .....	8-26
Knurled .....	8-27
Headed Concrete Anchor .....	8-28
Shear Connector .....	8-29

### 9. EQUIPMENT

Capacitor Discharge Eagle	
Capacitor Discharge Talon	
Capacitor Discharge SureShot	
Capacitor Discharge CD 80	
Capacitor Discharge CD 100	
Capacitor Discharge CD 700	
Arc UA 500	
Arc UA 1000	
Arc UA 1800	


### 10. ACCESSORIES

CD Accessory Brochure	
Arc Accessory Brochure	



450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

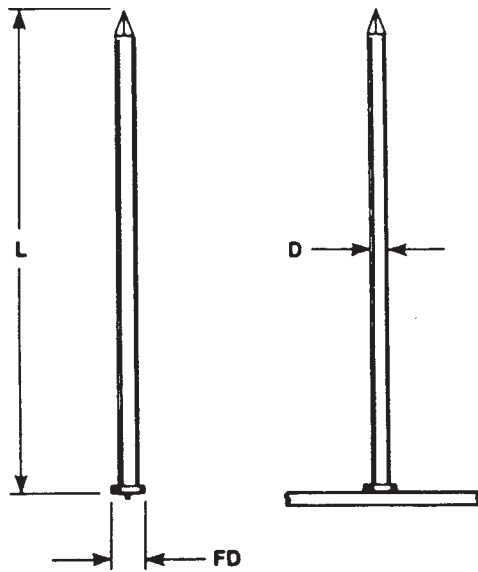

## CAPACITOR DISCHARGE (CD)

SIZE	PIN		
	D	STEEL FD	ALUM. FD
14GA	.080	.160	-
12GA	.105	.180	.230
3MM	.118	.190	-
10GA	.135	.195	.250

<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b> C - 0.23% max.    P - 0.04% max. Mn - 0.90% max.    S - 0.05% max.	<b>STAINLESS STEEL</b> AISI grade - 302/304/305 std. Other grades available upon request.
	<b>MECHANICAL PROPERTIES:</b> Yield            Tensile            60,000 psi (min.) 50,000 psi (min.)    request. Elongation            20% (in 2 inches)	Values for various grades available upon request.
<b>PLATING:</b>	Galvanized and Copper plating are available.	Does not apply to Stainless.
<b>ANNEALING:</b>	Pins are annealed where required.	Does not apply.

**MATERIAL:** ALUMINUM  
Alloy - 1110-H14 std. Other alloys available upon request.

**MECHANICAL PROPERTIES:**  
Values for various alloys available upon request.

**APPLICATION:** This is the standard weld pin used for most applications.

**WASHERS:** Self-locking washers are available in a variety of sizes, shapes, and materials.


**TO ORDER OR SPECIFY, GIVE:**

1. Product Code ..... WP
2. Size .....
3. Length ..... L
4. Material .....



450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

www.midwestfasteners.com

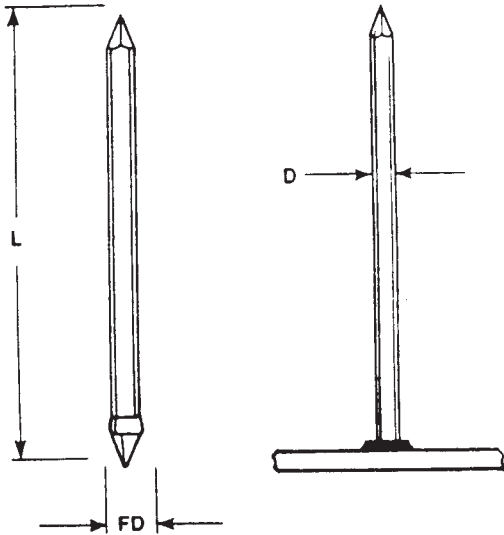

**“POWER TIP” (CD)**

PIN			
SIZE	D	L	FD
12GA	.105	AS REQUIRED	.171
10GA	.135	AS REQUIRED	.187

<b>MATERIAL:</b>	<b>LOW CARBON “MILD” STEEL</b>	<b>STAINLESS STEEL</b>
	C - 0.23% max. Mn - 0.90% max.	P - 0.04% max. S - 0.05% max.
<b>MECHANICAL PROPERTIES:</b>	Values for various grades available upon	
Yield	Tensile 60,000 psi (min.) 50,000 psi (min.) request. Elongation 20% (in 2 inches)	
<b>PLATING:</b>	Galvanized and Copper plating are available.	Does not apply to Stainless.
<b>ANNEALING:</b>	Can be annealed if required.	Can be annealed if required.


**APPLICATION:** Ideally suited for welding to surfaces covered with mill scale, rust, or paint without costly preparation.

**WASHERS:** Self-locking washers are available in a variety of sizes, shapes, and materials.

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code..... PT
2. Size.....
3. Length ..... L
4. Material .....

**MIDWEST FASTENERS, INC.**  
 450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com

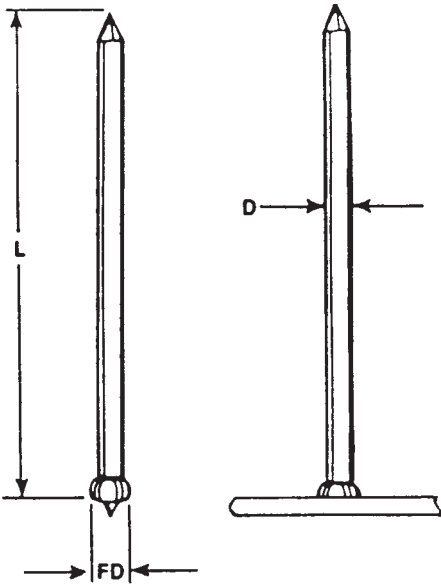

**“SURE-FIRE” (CD)**

PIN			
SIZE	D	L	FD
12GA	.105	AS REQUIRED	.175
10GA	.135	AS REQUIRED	.195

<b>MATERIAL:</b>	<b>LOW CARBON “MILD” STEEL</b>	<b>STAINLESS STEEL</b>
	C - 0.23% max. Mn - 0.90% max.	P - 0.04% max. S - 0.05% max.
<b>MECHANICAL PROPERTIES:</b>	Values for various grades available upon	
Yield	Tensile 60,000 psi (min.) 50,000 psi (min.) request. Elongation 20% (in 2 inches)	
<b>PLATING:</b>	Galvanized and Copper plating are available.	Does not apply to Stainless.
<b>ANNEALING:</b>	Can be annealed if required.	Can be annealed if required.

**APPLICATION:** Ideally suited for welding to surfaces covered with mill scale, rust, or paint.

**WASHERS:** Self-locking washers are available in a variety of sizes, shapes, and materials.


**TO ORDER OR SPECIFY, GIVE:**

1. Product Code..... SF
2. Size.....
3. Length ..... L
4. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com

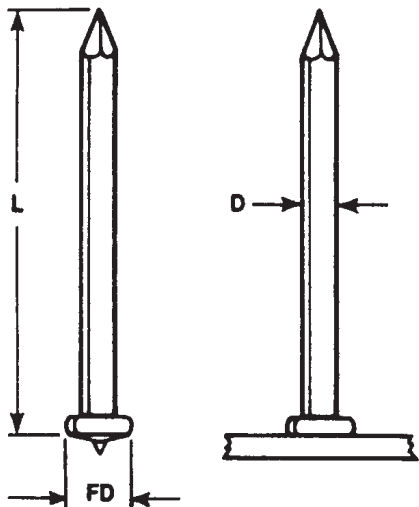

### CONICAL TIP (CD)

SIZE	PIN		
	D	L	FD
12GA	.105	AS REQUIRED	.220
10GA	.135	AS REQUIRED	.250

**MATERIAL:** ALUMINUM

Alloy - 1100-H14 std. Other alloys available upon request.

**MECHANICAL PROPERTIES:**

Values for various alloys available upon request.

**APPLICATION:** Ideally suited for welding with production Stud Welding systems and for STUCCO embossed panels.

**WASHERS:** Self-locking washers are available in a variety of sizes, shapes, and materials.


**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....CT
2. Size.....
3. Length ..... L
4. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com

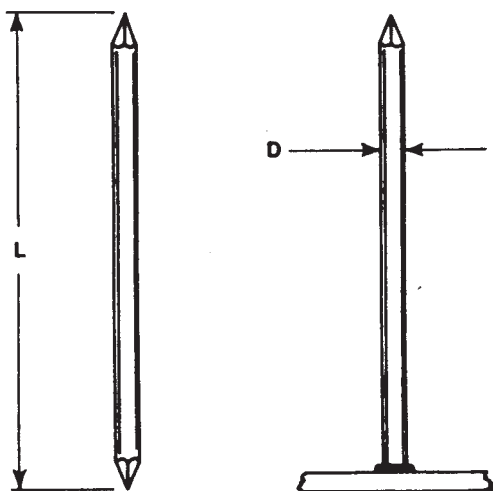

## DOUBLE POINTED (ARC)

PIN			
SIZE	D*	L	FERRULE
			CODE
10GA	.135	AS REQUIRED	F135


\*Other diameters available upon request.

<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b>	<b>STAINLESS STEEL</b>
	C - 0.23% max. Mn - 0.90% max.	P - 0.04% max. S - 0.05% max.
<b>MECHANICAL PROPERTIES:</b>	Values for various grades available upon request.	
Yield	Tensile 60,000 psi (min.) 50,000 psi (min.) request. Elongation 20% (in 2 inches)	
<b>PLATING:</b>	Galvanized and Copper plating are available.	Does not apply to Stainless.
<b>ANNEALING:</b>	Can be annealed where required.	Can be annealed if required.

**APPLICATION:** This is the standard weld pin used when only arc stud welding equipment is available.

**WASHERS:** Self-locking washers are available in a variety of sizes, shapes, and materials.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.




FERRULE					
CODE	B	D	E	M	PART NO.
F135	.281	.375	.156	.390	092 0005 04

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....DP
2. Size.....
3. Length ..... L
4. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

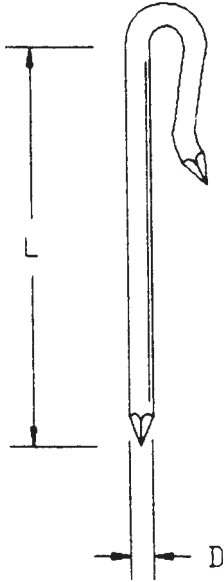

**“J”- HOOK**

PIN		
SIZE	D*	L
10GA	.135	AS REQUIRED

\*Other diameters available upon request.

<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b>	<b>STAINLESS STEEL</b>
	C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b>	Tensile	60,000 psi (min.)
	Yield	50,000 psi (min.) request.
	Elongation	20% (in 2 inches)
		Values for various grades available upon request.
<b>PLATING:</b>	Galvanized and Copper plating are available.	Does not apply to Stainless.
<b>ANNEALING:</b>	Can be annealed where required.	Can be annealed if required.

**APPLICATION:** This is the standard insulation fastener used to secure insulation to wire road mesh.

**WASHERS:** Self-locking washers are available in a variety of sizes, shapes, and materials.


**TO ORDER OR SPECIFY, GIVE:**

- 1. Product Code..... JH
- 2. Size.....
- 3. Length ..... L
- 4. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com



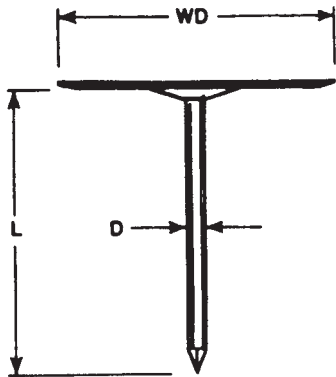

**CUP HEAD PIN (CD)**

TYPE	D	WD	MIN.	MAX.
			L	L
CS12	.105	1.187	3/8	16"
CS14	.080	1.187	3/16	16"
CL12	.105	1.500	3/8	16"


PIN		WASHER	
<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b> C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	<b>LOW CARBON STEEL</b> C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	
<b>MECHANICAL PROPERTIES:</b>	Values available upon request.	Values available upon request.	
<b>PLATING:</b>	Galvanized is standard. Copper plating is available upon special request.	Standard Washer is galvanized.	
<b>BEVEL:</b>	Washer edge is beveled to prevent cutting of insulation material.		
<b>STAINLESS STEEL:</b>	Not standard, but available by special order.		

**PAPER INSULATING WASHERS:**  
Available for welding through foil faced insulation.  
Paper insulating washers can be ordered separately or factory installed.

- TO ORDER OR SPECIFY, GIVE:**
1. Product Code ..... CHSW
  2. Size .....
  3. Length ..... L
  4. Material .....

200907

**MIDWEST FASTENERS, INC.**  
450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174  
www.midwestfasteners.com

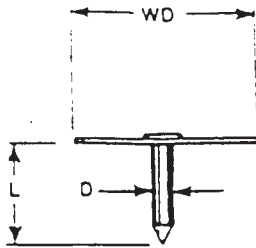

## CUP HEAD PIN

**APPLICATION:** This cup head pin is for use with Duro-Dyne auto feed resistance welding equipment.

TYPE	D	WD	MIN.
			L
CM10	.135	1.000	3/8

PIN		WASHER	
<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b> C - 0.23% max.    P - 0.04% max. Mn - 0.90% max.    S - 0.05% max.	<b>LOW CARBON STEEL</b> C - 0.23% max.    P - 0.04% max. Mn - 0.90% max.    S - 0.05% max.	
<b>MECHANICAL PROPERTIES:</b>	Values available upon request.	Values available upon request.	
<b>PLATING:</b>	Galvanized is standard. Copper plating is available upon special request.	Standard Washer is galvanized.	
<b>BEVEL:</b>	Washer edge is beveled to prevent cutting of insulation material. Flat washer style also standard. Both styles Auto-Feed quality.		
<b>STAINLESS STEEL:</b>	Not standard, but available by special order.		


**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....CHMW
2. Washer Type.....Beveled or Flat
3. Length ..... L
4. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com

## SELF-LOCKING WASHERS (Square)

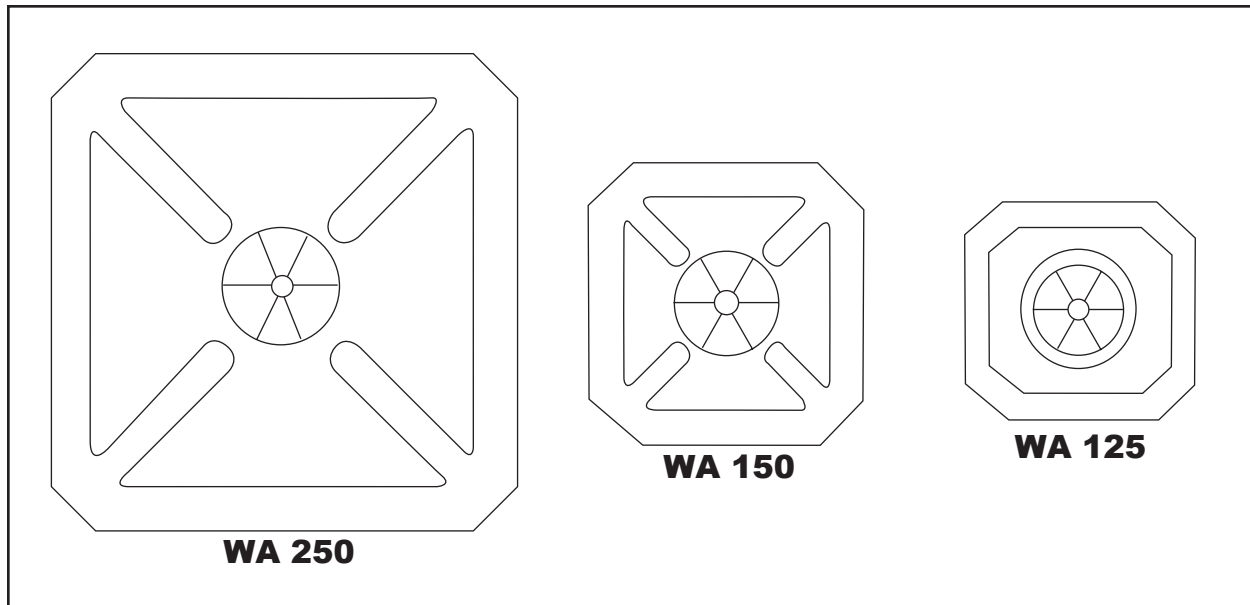

Type	WA 250	WS 150	WA 125
Diameter	2-1/2 x 2-1/2	1-1/2 x 1-1/2	1-1/4 x 1-1/8
Thickness	.015 nom.	.015 nom.	.015 nom
Material	Mild Steel	Mild Steel	Mild Steel
Plating	Galv.	Galv.	Galv.
Edges / flat or beveled	beveled	beveled	beveled
Other materials available	Alum., S.S.	Alum., S.S.	Alum., S.S.
Packaged per carton	1000	1000	1000

**MIDWEST FASTENERS** Self-Locking Washers are used in conjunction with **MIDWEST FASTENERS** weld pins, insul-anchors and lacing anchors to fasten insulation in place. Simply press the self-locking washer onto the pin up to the insulation until the desired position is reached. Then clip off, (or bend over) the remaining portion of pin for a permanent attachment.

Both Round or Square self-locking washers are available as a matter of design or application preference. The domed, multi-lanced hole design provides for

ease of locating washer on pin and positive locking. Most styles of washers are manufactured with a beveled edge to prevent the washer from cutting into the insulation facing.

**MIDWEST FASTENERS** Self-Locking Washers are available according to the chart above and with standard 10 GA, 12 GA, or 14 GA hole sizes off-the-shelf. Other material/plating combinations and hole sizes are available by special order.


### TO ORDER OR SPECIFY, GIVE:

1. Product Code.....WA, WS
2. Material .....MS, SS, AL
3. Type.....250, 150, 125
4. Diameter of pin/stud on which washer is to be used .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)

## SELF-LOCKING WASHERS (Round)

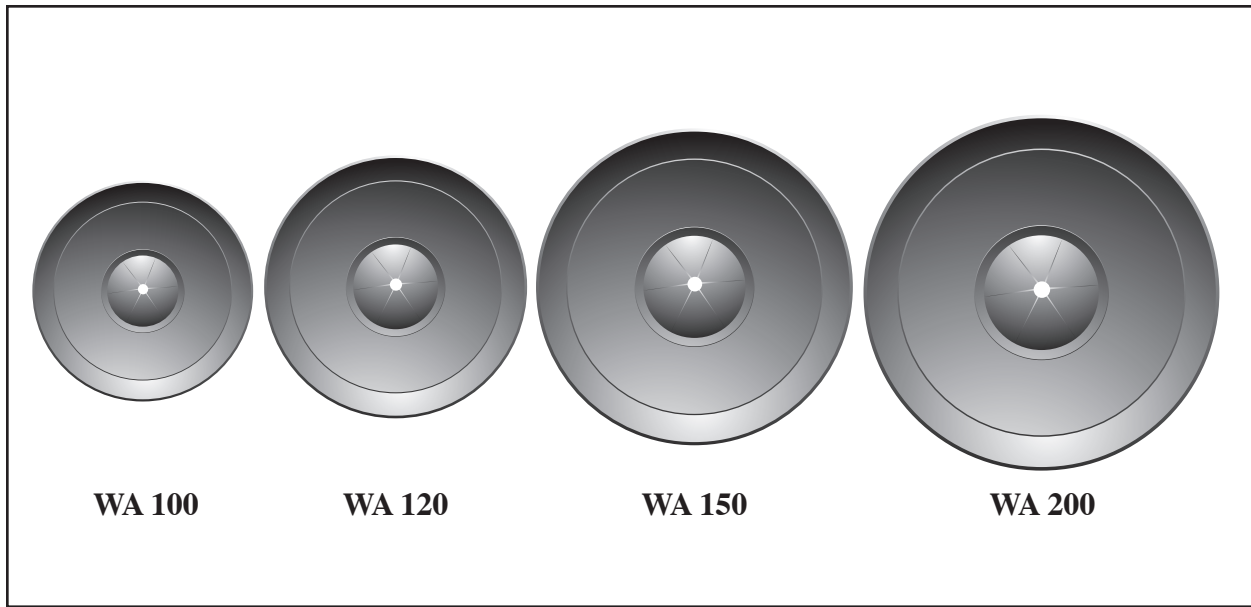

Type	WA 100	WA 120	WA 150	WA 200
Diameter	1"	1-3/16"	1-1/2"	2"
Thickness	.015 nom.	.015 nom.	.015 nom.	.015 nom.
Material	Mild Steel	Mild Steel	Mild Steel	Mild Steel
Plating	Galv.	Galv.	Galv.	Galv.
Edges / flat or beveled	beveled	beveled	beveled	beveled
Other materials available	Alum., S.S.	Alum., S.S.	Alum., S.S.	Alum., S.S.
Packaged per carton	1000	1000	1000	1000

**MIDWEST FASTENERS** Self-Locking Washers are used in conjunction with **MIDWEST FASTENERS** weld pins, insul-anchors and lacing anchors to fasten insulation in place. Simply press the self-locking washer onto the pin up to the insulation until the desired position is reached. Then clip off, (or bend over) the remaining portion of pin for a permanent attachment.

Both Round or Square self-locking washers are available as a matter of design or application preference. The domed, multi-lanced hole design provides for ease of

locating washer on pin and positive locking. Washers are manufactured with a beveled edge to prevent the washer from cutting into the insulation facing.

**MIDWEST FASTENERS** Self-Locking Washers are available according to the chart above and with standard 10 GA, 12 GA, or 14 GA hole sizes off-the-shelf. Other material/plating combinations and hole sizes are available by special order.

### TO ORDER OR SPECIFY, GIVE:

1. Product Code..... WA
2. Material .....MS, SS, AL
3. Type.....100, 120, 150, or 200
4. Diameter of pin/stud on which washer is to be used .....




450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

# MISCELLANEOUS INSULATION WASHERS

## PCW

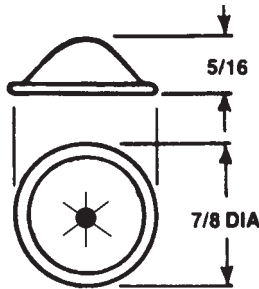

### CAPPED SPEED WASHER

**APPLICATION:**

Designed to permanently lock on to weld pins or insul-anchors where appearance is a major factor, or where no sharp points or edges are permissible on the surface.


**MATERIAL:** Decorative Domed Cap—Aluminum  
Self-Locking Insert—Hardened Steel

**COLOR:** Plain (bright aluminum) or painted white. Other painted colors are available by special order.

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....PCW
2. Size.....10 GA, 12 GA or 14 GA
3. Color .....

## L2H LRZA

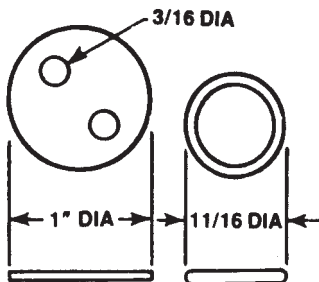

### LACING WASHER & RING

**APPLICATION:**

Designed to be used with lacing wire to wrap insulation around irregular shapes.

**MATERIAL:** Washer—Aluminum or Stainless Steel  
Ring—Zinc alloy, bright zinc plated.

**NO-AB:** Washers are available stamped 'NO AB' to indicate non-asbestos material.

**TO ORDER OR SPECIFY, GIVE:**

**Lacing Washer**

1. Product Code..... L2H
2. Material .....

**Lacing Ring**

1. Product Code.....LRZA
2. Material .....Zinc Alloy





450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

www.midwestfasteners.com

## NAVY STUDS – WASHERS, CAPS & NUTS

### MCAL



### **ANNULAR RING CAP (For annular ring studs)**

**APPLICATION:**

Designed to permanently lock on to Navy annular ring studs.


**MATERIAL:** Aluminum, Mild Steel and Aluminum

**SIZE:** For or 3/16" diameter studs.

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code..... MCAL
2. Size.....

### WAK

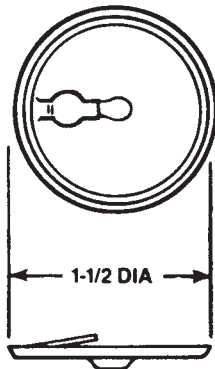

### **KEY HOLE SLOTTED WASHER (For 3/16 dia. notched end studs)**

**APPLICATION:**

Designed to lock on to Navy notched end studs.

**MATERIAL:** Mild Steel—Galvanized.

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....WAK
2. Material .....

### **FLAT WASHERS & HEX NUTS (For all threaded studs)**


These “accessory” items can be ordered with Threaded Weld Studs for general application and to meet Military Specifications where required.



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)

## PANEL CAPS & NUTS

### WAG AL

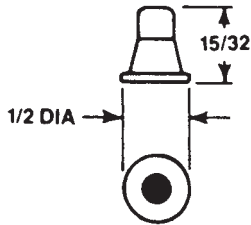

### ANNULAR GROOVE CAP (For annular groove shoulder studs)

**APPLICATION:**

Designed to permanently lock on to annular groove shoulder studs to hold panel in place against stud shoulder.


**MATERIAL:** Aluminum

**SIZE:** For 3/16 diameter annular groove

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....WAG AL

### CAP SETTING TOOL (For installing WAG AL caps)

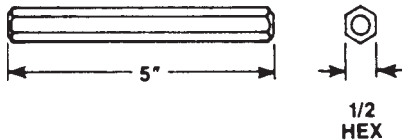


**APPLICATION:**

This tool is recommended for installing the Annular Groove Cap (above).

**TO ORDER OR SPECIFY, GIVE:**

1. Name .....Cap Setting Tool

### PNAL

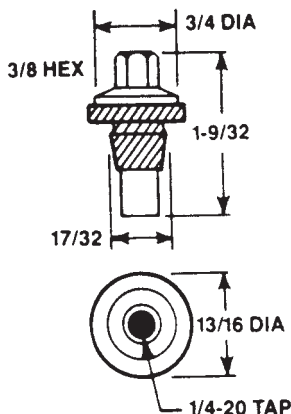

### PANEL NUT (For 1/4-20 threaded studs)

**APPLICATION:**

Designed to be threaded down through pre-drilled holes in the panel on to pre-welded studs providing firm, water resistant attachment.

**MATERIAL:** Aluminum & Neoprene Rubber.

**SIZE:** For 1/4-20 threaded studs.

**TO ORDER OR SPECIFY, GIVE:**


1. Product Code.....PNAL



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com

## COMBINATION NUTS

### PAL-NUT

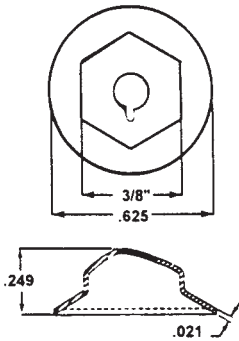

### COMBINATION HEX-NUT and LOCK-WASHER (“OPEN”) for 10-24 threaded studs

**APPLICATION:** with 10-24 weld studs.

One-piece washer-type locknut combination serving as hex nut, lockwasher and flat washer. Locking design eliminates back-off due to vibration and thermal stress.

**MATERIAL:** Mild Steel. Zinc Plated.

**SIZE:** For 10-24 threaded studs

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....PAL-NUT
2. Part Number .....D010241

### COMBINATION HEX-NUT and LOCK-WASHER (“CLOSED”) for 10-24 threaded studs

**APPLICATION:** with 10-24 weld studs.

One-piece washer-type locknut combination serving as hex nut, lockwasher and flat washer. Design encloses fastener when placed on stud.


**MATERIAL:** Mild Steel. Nickel Plated.

**SIZE:** For 10-24 threaded studs

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....CAP-NUT
2. Part Number .....KD102410

### HEX CAP NUT




Style KD



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)



# SPINDLE

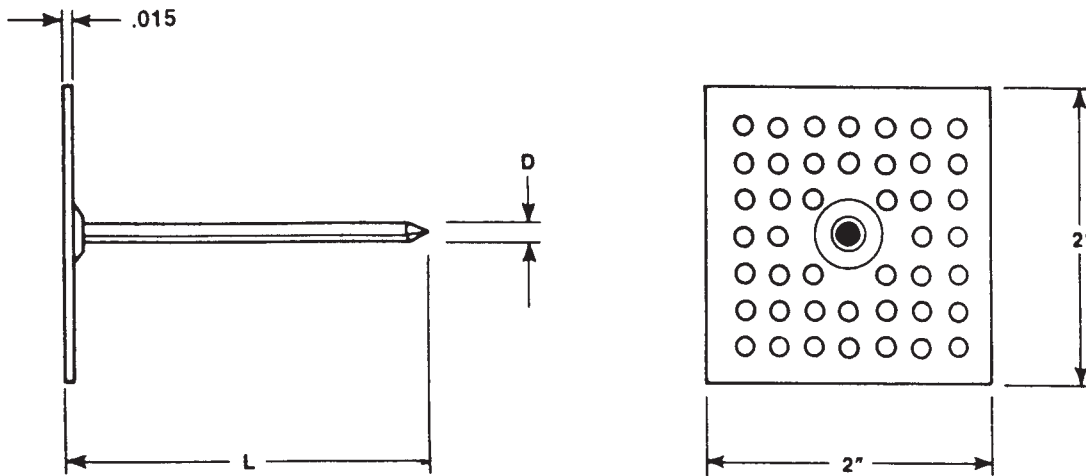

<b>SIZE:</b>	D	12 GA (.105") is standard. Other sizes available by special order only.
<b>LENGTH:</b>	L	1", 1-5/8", 2", 2-1/2", 3-1/2", 4-1/2", 5-1/2", 6-1/2", 8" and 9" are standard. Other lengths available by special order.

**PIN**

<b>MATERIAL:</b>	LOW CARBON STEEL
<b>PLATING:</b>	Galvanized coating is standard.

**PLATE**

**OTHER MATERIALS**

<b>MATERIAL:</b>	LOW CARBON STEEL	Also available by special order in all Stainless Steel or all Aluminum
<b>PLATING:</b>	Galvanized is standard.	

**WASHERS:** Self-locking washers are available in a variety of sizes, shapes, and materials.


**TO ORDER OR SPECIFY, GIVE:**

1. Product Code..... IHSP
2. Size..... 12 GA
3. Length ..... L
4. Material .....(if other than standard)



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com

# SELF-STICK

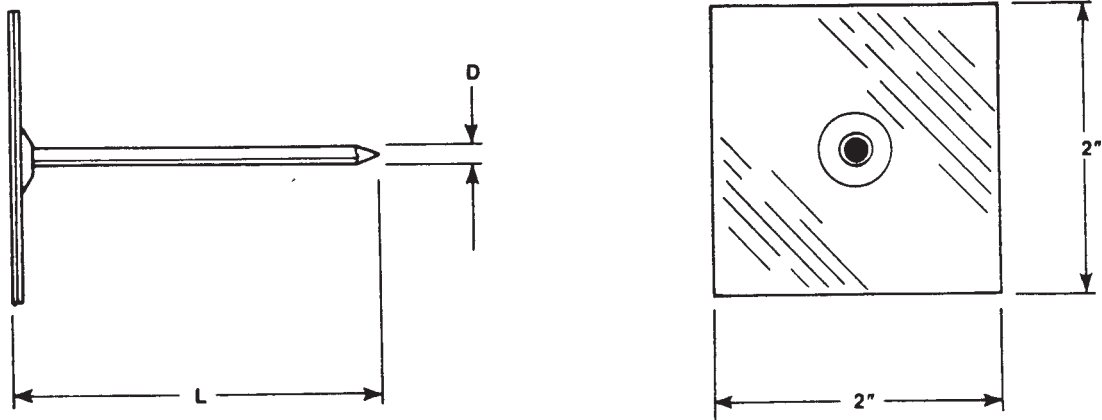

<b>SIZE:</b>	D	12 GA (.105") is standard. Other sizes available by special order only.
<b>LENGTH:</b>	L	1", 1-5/8", 2", 2-1/2", 3-1/2", 4-1/2", 5-1/2", 6-1/2", 8" and 9" are standard. Other lengths available by special order.

**PIN**

<b>MATERIAL:</b>	LOW CARBON STEEL
<b>PLATING:</b>	Galvanized coating is standard.

**PLATE**

**OTHER MATERIALS**

<b>MATERIAL:</b>	LOW CARBON STEEL	Also available by special order in all Stainless Steel or all Aluminum
<b>PLATING:</b>	Galvanized coating is standard.	

**WASHERS:** Self-locking washers are available in a variety of sizes, shapes, and materials.

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....IHSS
2. Size..... 12 GA
3. Length ..... L
4. Material .....(if other than standard)



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com



## IMPORTANT NOTICE TO PURCHASER

All statements, technical information and recommendations contained herein are based on facts we believe to be reliable, but the accuracy or completeness thereof is not guaranteed, and the following is made in lieu of all warranties, express or implied.

Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising out of the use of or the inability to use the product.

Before using, user shall determine the suitability of the product for his intended use and user assumes all risk and liability whatsoever in connection therewith.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of seller and manufacturer.


## GUIDELINES FOR SELF STICK INSUL-ANCHORS

1. Must be applied to a clean, non-porous surface, that is free of all oil, film, dust, rust, etc.
2. Not generally recommended on painted surfaces, drywall, nor ceilings of metal buildings.
3. Best results are obtained when ambient temperature is above 40 degrees F. at time of application.
4. Temperature range for the foam tape is from -20 degrees to +180 degrees F.
5. Loading should not exceed 3 lbs. per anchor (.75 lb./sq. inch).
6. Base must be applied with firm pressure. Do not twist during application. Do not remove release (backing) paper until ready to use.
7. Insulation may be applied immediately after bond is made.




450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)

# NYLON

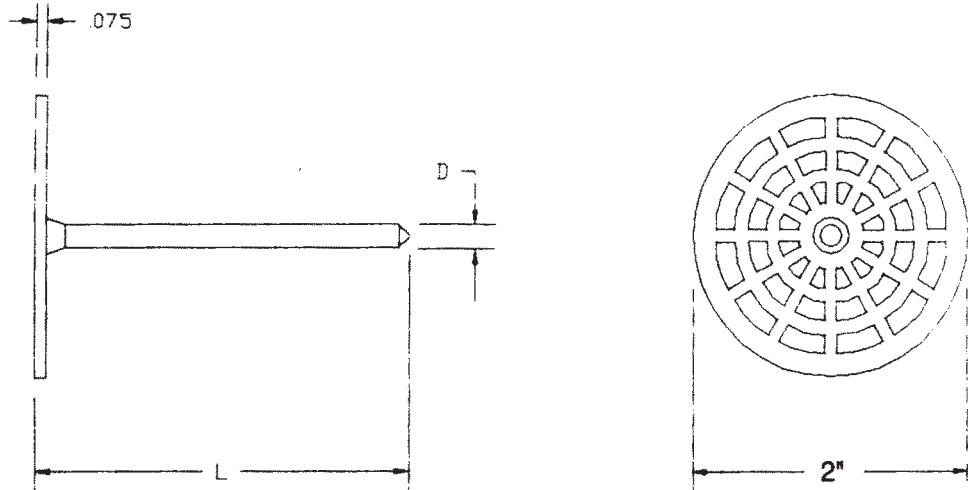

<b>SIZE:</b>	D	5/32" Standard
<b>LENGTH:</b>	L	2-1/2" Standard
<b>MATERIAL:</b>	This is a one-piece insul-anchor of molded nylon.	

- FEATURES:**
- Can be used for insulation up to 2" thick.
  - Has a base area 14% larger than similar nylon anchors with a round base.
  - Has 21% more perforated area for glue extrusion than similar nylon anchors.
  - Uses 30% less adhesive than metal insul-anchors with a 2" round base.
  - Will not conduct heat or cold.
  - Lighter in weight than metal anchors for ease of handling.

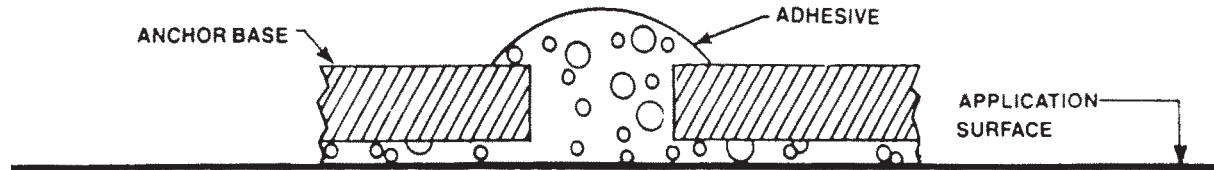

**WASHERS:** The self-locking washer for use with this insul-anchor is the WAMS-120-156. These washers are packed with anchors.

**TO ORDER OR SPECIFY, GIVE:**


1. Product Code.....IHNY



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

## ANNULAR RING ANCHOR-BOLT

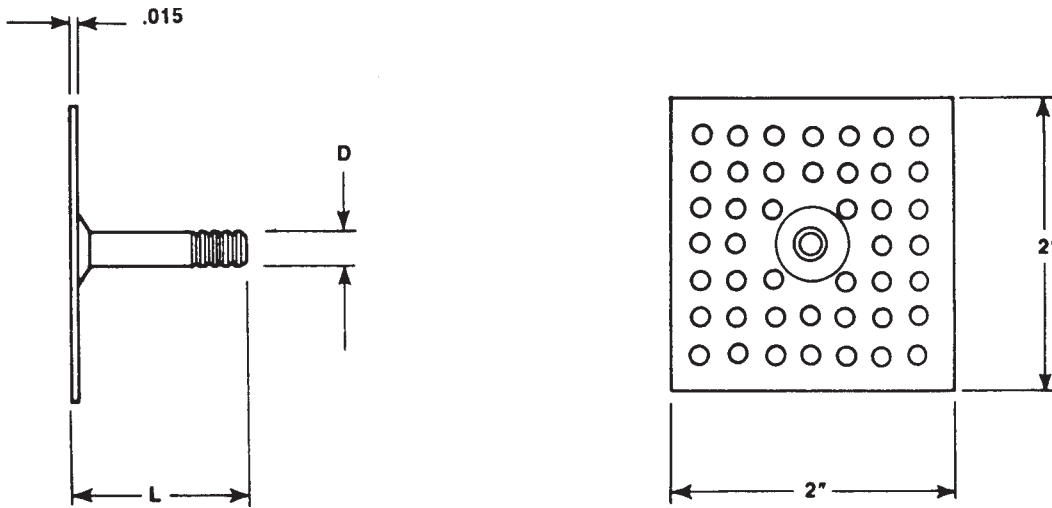

**SIZE:** D 3/16 nominal. Actual ring diameter is .175".

**LENGTH:** L 7/8, 1-7/8, 2-7/8, and 3-7/8 are standard.  
Other lengths available by special order.

	<i>PLATE</i>	<i>BOLT</i>
<b>MATERIAL:</b>	LOW CARBON STEEL	LOW CARBON STEEL
<b>PLATING:</b>	Galvanized is standard.	Copper plating is standard.

**OTHER MATERIALS:**  
Available by special order only.


**RETAINING CAP:**  
The cap for use with this anchor-bolt is the MCAL part no. MCAL-625-875.

- TO ORDER OR SPECIFY, GIVE:**
1. Product Code.....IHAB
  2. Size.....D
  3. Length ..... L
  4. Material .....(if other than standard)



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com

# THREADED ANCHOR-BOLT

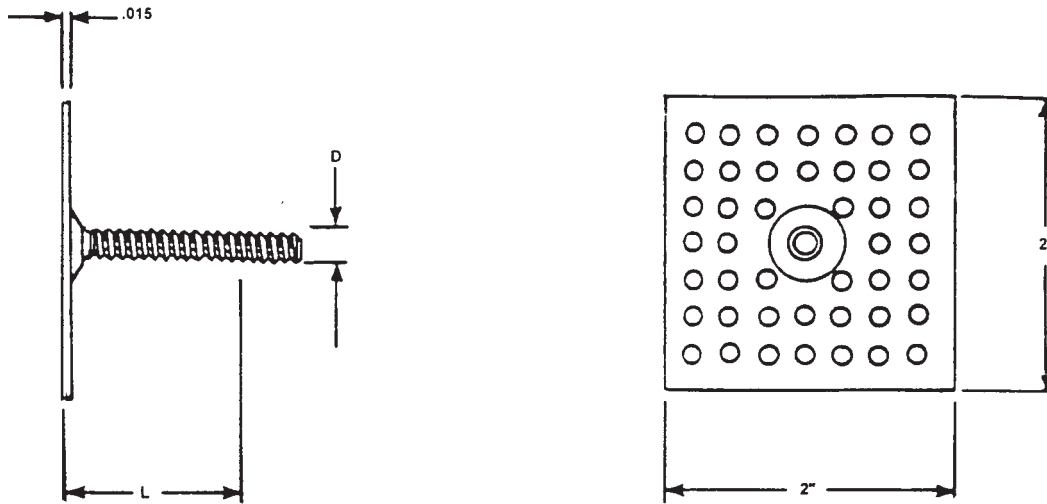

<b>SIZE:</b>	D	#10-24 is standard. Other sizes available by special order.
<b>LENGTH:</b>	L	3/4" to 3" long, in 1/4" increments as standard. Other lengths available by special order.

	<b>PLATE</b>	<b>BOLT</b>
<b>MATERIAL:</b>	LOW CARBON STEEL	LOW CARBON STEEL
<b>PLATING:</b>	Galvanized plating is standard.	Copper plating is standard.

**OTHER MATERIALS:**  
Available by special order only.


**HARDWARE:**  
Hex nuts, flat washers and lock washers are available in a variety of materials.

- TO ORDER OR SPECIFY, GIVE:**
1. Product Code.....IA AB-THD
  2. Size.....D
  3. Length ..... L
  4. Material .....(if other than standard)



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com

## SAFING "Z" CLIP

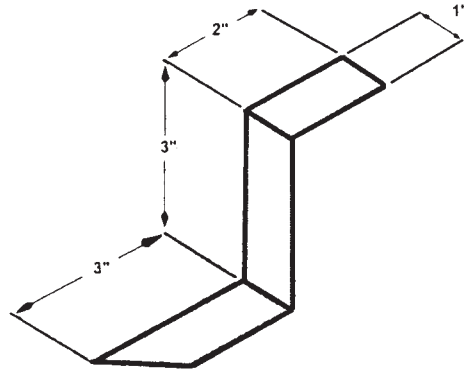

**SIZE:** 2" x 3" x 3" x 1" standard size

**LENGTH:** 20 Gauge, Mild Steel

**PLATING:** Galvanized is standard.

**APPLICATION:** For use in installation of fire barrier and sound barrier safing insulations.

This non-welded fastener is used as a support bracket to impale and secure Insulating materials between floor slab and spandrels at floor edge or anywhere that support for material is required.

**STANDARD PACKAGING:**

500 per carton (43lbs. carton weight - approximately)

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....ZCLIP
2. Size.....(if other than standard)
3. Material.....(if other than standard)



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

## MIDWEST Fasteners IHA-177 INSULATION HANGER ADHESIVE

### **Product Data:**

MIDWEST Fasteners HANGER ADHESIVE is a high strength, heavy-bodied adhesive, specifically formulated for adhering anchors for hanging insulation.

IHA-177 HANGER ADHESIVE bonds metal and nylon anchors to metal, concrete or masonry surfaces. The product can also be used to install metal or ceramic wall fixtures and in tile applications.

MIDWEST Fasteners HANGER ADHESIVE is also available for use as a general-purpose construction adhesive in applications requiring a high strength bond, or in applications subjected to high temperatures.

### **Special Characteristics:**

- ◆ Excellent thermal shock resistance
- ◆ High bond strength
- ◆ Water resistant
- ◆ Immediate grab
- ◆ Mildew resistant
- ◆ Non-slip formula

### **TYPICAL PHYSICAL PROPERTIES AND TECHNICAL INFORMATION:**

**Base:** Thermoplastic Rubber

**Type:** Solvent

**Solids Content:** 64%

**Color:** Light Brown

**Weight/gallon:** 9.0 lbs./gal.

**Shear Strength:** Greater than 600 psi (AFG 01)

**Water Resistance:** Excellent

**Consistency:** Gun Grade Mastic

**Application Temperature:** 30°F to 120°F

**Extrudability:** Excellent (ASTM C 731)

**Service Temperature:** -30°F to 250°F

**Shelf Life:** 12 months

**Storage Temp:** Store at room temperature with cross ventilation.

**Clean-up:** Mineral Spirits, exercising safe practices  
OSHA Class 1B liquid. Store per 29 CFR 1910, 106.

**Coverage:** 500-1000 anchors per gallon

**Flammability:** Flammable, Red Label

**Flash point:** (ASTM D 3828) -9°F

**Open time:** 15 minutes at 75°F and 50% relative humidity



450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)



# MIDWEST Fasteners IHA-177 INSULATION HANGER ADHESIVE

## DIRECTIONS FOR USE:

- 1. Use only after careful consideration of the warnings, directions, and first aid instructions given.**
- 2. Surface Preparation:** Surfaces to be bonded should be clean, dry and free of any dust, frost, wax, moisture, dirt, grease, oil, rust, or other contaminants. Do not use over painted surfaces. Many protective coatings are not compatible with Anchor Adhesive.
- 3. Adhesive Preparation:** Adhesive should be stored at room temperature (60°F to 80°F) for at least 24 hours prior to use.
- 4. Working Temperature:** For best results, adhesive and materials to be bonded should be 30°F to 120°F.
- 5. Adhesive Application:** Do not apply at temperatures below 30°F. Prepare and install one anchor at a time. Apply a dab (the size of a small walnut) of adhesive to the anchor base with a putty knife and immediately (maximum open time is 10 minutes) press anchor firmly into place, with a slight twisting motion. For proper adhesion, insure that the film of adhesive covering the anchor base (after the anchor has been firmly pressed into place) is protruding
- 6. Installing Anchor Adhesive to Concrete Surfaces:** New concrete surfaces need to cure a minimum of 28 days in order to ensure best adhesion. All concrete surfaces should be high pressure water blasted or sand blasted to remove any surface curing agents and all foreign matter. Spread anchor adhesive on anchor base allowing solvent to flash off for several minutes before pressing anchor firmly into place with a slight twisting motion. Do not apply load until application is completely dry.

## PACKAGING INFORMATION

<u>SIZE</u>	<u>PACKED</u>	<u>PART #</u>	<u>WEIGHT</u>
QUART	12/carton	IHA-177-QT	16lbs. /carton
GALLON	4/carton	IHA-177-GA	39lbs. /carton

\*MIDWEST Fasteners does not ship IHA-177 Adhesive by Air; standard shipments are UPS or Motor Freight.  
Also sold by MIDWEST only in carton-lot quantities.



450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

**MIDWEST Fasteners  
Hanger Adhesive  
IHA-177**

**CAUTIONARY INFORMATION**

**Contains:** Toluene and Silica, Quartz

Warning: This product contains Silica, Quartz, a chemical known to the State of California to cause cancer. This product contains Toluene a chemical known to the State of California to cause birth defects or other reproductive harm. Cancer Hazard: Contains Crystalline Silica which may cause cancer. Risk of cancer depends on duration and level of exposure.

VAPOR HARMFUL, MAY AFFECT THE BRAIN OR NERVOUS SYSTEM CAUSING DIZZINESS, HEADACHE OR NAUSEA. CAUSES EYE, SKIN, NOSE AND THROAT IRRITATION. MAY BE HARMFUL IF ABSORBED THROUGH SKIN.

**NOTICE:** Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the content may be harmful or fatal. Use only with adequate ventilation: Vapors may ignite explosively. Do not breathe dust, vapors or spray mist. Ensure fresh air entry during application and drying. If you experience eye watering, headache or dizziness or if monitoring demonstrates vapor/mist levels are above applicable limits, wear an appropriate, properly fitted respirator (NIOSH/MSHA approved) during and after application. Follow respirator manufacturer's directions for respirator use. Close container after each use. Keep away from heat, sparks and flame: Do not smoke. Extinguish all flames and pilot lights, and turn off stoves, heaters, electric motors and other sources of ignition during use and until all vapors are gone. Prevent build-up of vapors by opening all windows and doors to achieve cross-ventilation. Avoid contact with eyes, skin and clothing. Wash thoroughly after handling. VAPORS MAY CAUSE FLASH FIRE.

**First Aid:** If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical assistance immediately. In case of eye contact, flush immediately with plenty of water for at least 15 minutes and get medical attention immediately; for skin, wash thoroughly with soap and water. If swallowed, do not induce vomiting. Call Poison Control Center, Hospital Emergency Room or Physician immediately. If spilled: Contain spilled material and remove with inert absorbent. Dispose of contaminated absorbent, container and unused contents in accordance with local, state and Federal regulations.

**KEEP OUT OF THE REACH OF CHILDREN F#2100 L210v1**

**Notice to Purchaser:** NO WARRANTIES, EXPRESS OR IMPLIED ARE MADE INCLUDING MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE. UNDER NO CIRCUMSTANCES SHALL THE MANUFACTURER BE LIABLE FOR ANY LOSS OR DAMAGE ARISING FROM THE PURCHASE, USE, OR INABILITY TO USE THIS PRODUCT, OR FOR ANY SPECIAL, INDIRECT INCIDENTAL, OR CONSEQUENTIAL DAMAGES. IF SUCH TESTING PROVES A PRODUCT DEFECT, THE USER'S SOLE AND EXCLUSIVE REMEDY IS EITHER REIMBURSEMENT OF THE PURCHASE PRICE OF THE PRODUCT OR REPLACEMENT OF THE CONTAINER OF PRODUCT. NO FABRICATOR, INSTALLER, DEALER, AGENT OR EMPLOYEE HAS THE AUTHORITY TO MODIFY THE OBLIGATIONS OR LIMITATION OF THIS WARRANTY.


This warranty gives you specific legal rights, and you may also have other rights which vary from state to state; therefore, some of the limitations stated above may not apply to you. It is to your benefit to save your documentation upon purchase of a product. Rev. 03-07



450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

# LACING ANCHOR

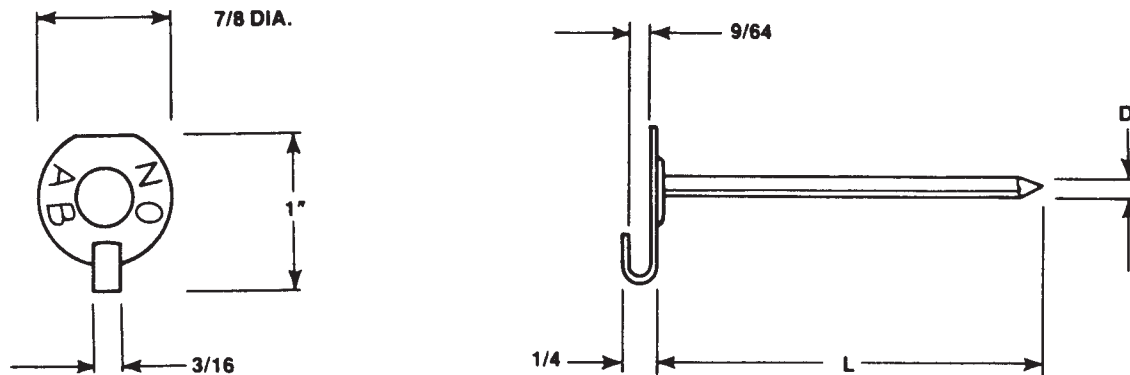

**SIZE:** D 12 GA & 14 GA are standard. Other sizes are available by special order.

**LENGTH:** L 2-1/2" & 4-1/2" are standard. Other lengths available by special order.

<b>MATERIAL:</b>	LOW CARBON STEEL	STAINLESS STEEL
------------------	------------------	-----------------

<b>PLATING:</b>	Zinc plating is standard.	Does not apply to stainless.
-----------------	---------------------------	------------------------------

**OTHER MATERIALS:**  
Available by special order only.

**WASHERS:** Self-locking washers are available in a variety of sizes, shapes, and materials.


**TO ORDER OR SPECIFY, GIVE:**

1. Product Code .....LA
2. Size .....D
3. Length ..... L
4. Material .....(if other than standard)



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com

# SLIM LACING ANCHOR

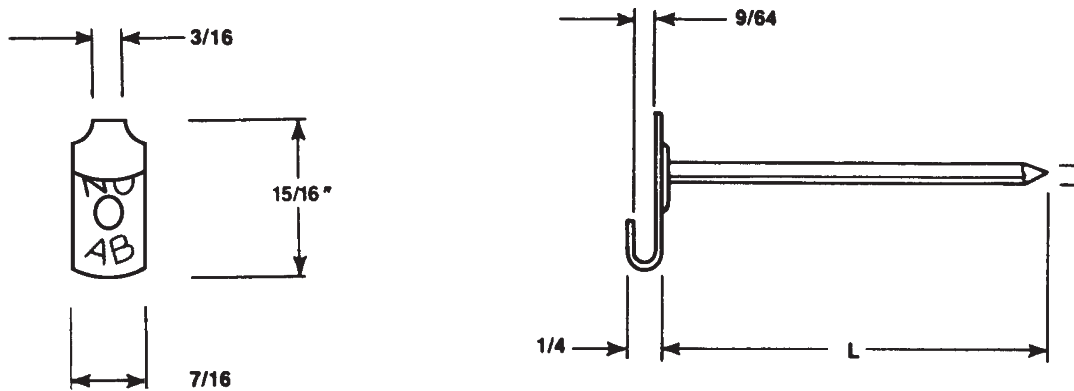

**SIZE:** D 12 GA & 14 GA are standard. Other sizes are available by special order.

**LENGTH:** L 2-1/2" & 4-1/2" are standard. Other lengths available by special order.

<b>MATERIAL:</b> LOW CARBON STEEL	STAINLESS STEEL
-----------------------------------	-----------------

<b>PLATING:</b> Zinc plating is standard.	Does not apply to stainless.
-------------------------------------------	------------------------------

**NO-AB:** Furnished stamped NO AB to indicate non-asbestos material.

**OTHER MATERIALS:**  
Available by special order only.

**WASHERS:** Self-locking washers are available in a variety of sizes, shapes, and materials.



**TO ORDER OR SPECIFY, GIVE:**

1. Product Code ..... LS
2. Size ..... D
3. Length ..... L
4. Material ..... (if other than standard)



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)

# QUILTING PIN

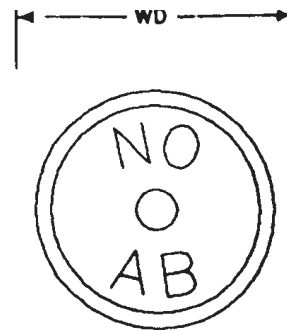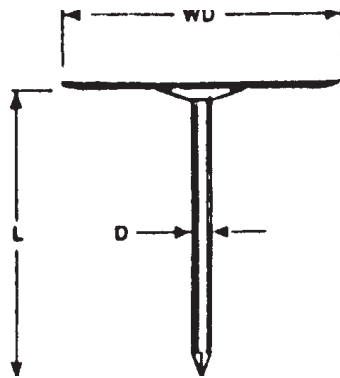

<b>SIZE:</b>	D	12 GA & 14 GA are standard. Other sizes are available by special order.
	WD	1.187" diameter washer is standard.
<b>LENGTH:</b>	L	2-1/2" & 4-1/2" are standard. Other lengths available by special order.
<b>MATERIAL:</b>	LOW CARBON STEEL	STAINLESS STEEL
<b>PLATING:</b>	Does not apply to Low Carbon.	Does not apply to stainless.

**OTHER MATERIALS:**  
Available by special order only.

**WASHERS:** Self-locking washers are available in a variety of sizes, shapes, and materials.

**TO ORDER OR SPECIFY, GIVE:**


1. Product Code.....QP
2. Size.....D
3. Length ..... L
4. Material .....(if other than standard)



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)

## LACING ACCESSORIES

### LA HOOK

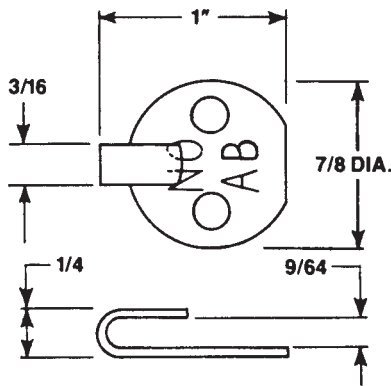

### LACING HOOK

**SIZE:** One size as shown.


**MATERIAL:** Stainless Steel.

**NO-AB:** Furnished stamped NO AB to indicate non-asbestos material.

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....LAH
2. Material .....

### LA L100

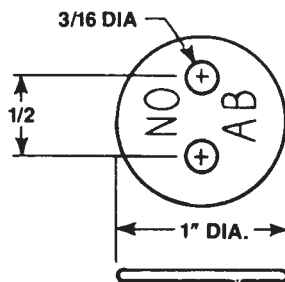

### L100 LACING WASHER

**SIZE:** One size as shown.


**MATERIAL:** Aluminum or Stainless Steel

**NO-AB:** Available stamped NO AB to indicate non-asbestos material.

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code..... L2H
2. Material .....

### LA RING

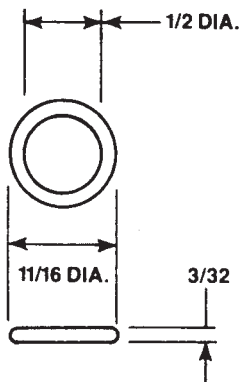

### LACING RING

**SIZE:** One size as shown.

**MATERIAL:** Zinc alloy - bright zinc plated

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....LRZA



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com

## MIDWEST FASTENERS GENERAL SPECIFICATIONS

<b>CAPACITOR DISCHARGE</b>	<b>ARC</b>										
<b>MATERIAL:</b> Standard in low carbon steel, 302/304/305 stainless, and 1100, 6061, and 5000 series aluminum. Brass and other grades of stainless steel are also available.	Standard in low carbon steel and 302/304/305 stainless. Aluminum, monel, inconel, and other grades of stainless steel are available.										
<b>PLATING:</b> Copper plating is standard. Cadmium, nickel, zinc, and other platings are available.	Cadmium to ASTM-A 165 type TS, zinc to ASTM-B 633 (formerly A 164) and other platings are available. Non-weldable plating is removed from the weld end to avoid contamination of the weld.										
<b>ANNEALING:</b> All low carbon steel and stainless steel studs are annealed where required.	Low carbon steel can be annealed to a maximum of 75 Rockwell B and stainless steel to a maximum of 90 Rockwell B.										
<b>THREADS:</b> UNC-2A is standard for external threads prior to plating and UNC-2B for internal threads. For metric and other thread sizes contact the MIDWEST FASTENERS Customer Service Department.											
<b>WELD BASE:</b> Flanged, small-flanged, and non-flanges are available.	1/4" dia. and over have solid flux. Diameters under 1/4" are standard pointed, and flux is optional.										
<b>STUD LENGTH:</b> CD studs have no appreciable length reduction after welding.	MIDWEST FASTENERS arc stud length designations are BEFORE WELD; AFTERWELD lengths are shown in the table below.										
<table border="1"> <thead> <tr> <th style="text-align: center;"><b>STUD DIAMETER</b></th> <th style="text-align: center;"><b>APPROX. REDUCTION</b></th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">3/16" thru 1/2"</td> <td style="text-align: center;">1/8"</td> </tr> <tr> <td style="text-align: center;">5/8" thru 7/8"</td> <td style="text-align: center;">3/16"</td> </tr> <tr> <td style="text-align: center;">7/8" and over</td> <td style="text-align: center;">1/4"</td> </tr> <tr> <td style="text-align: center;">1/8" wide rectangulars</td> <td style="text-align: center;">1/8"</td> </tr> </tbody> </table>		<b>STUD DIAMETER</b>	<b>APPROX. REDUCTION</b>	3/16" thru 1/2"	1/8"	5/8" thru 7/8"	3/16"	7/8" and over	1/4"	1/8" wide rectangulars	1/8"
<b>STUD DIAMETER</b>	<b>APPROX. REDUCTION</b>										
3/16" thru 1/2"	1/8"										
5/8" thru 7/8"	3/16"										
7/8" and over	1/4"										
1/8" wide rectangulars	1/8"										

**FERRULES:** Does not apply to CD

All orders include ferrules when they are required.



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

## THE MIDWEST FASTENERS CAPACITOR DISCHARGE (CD) STUD WELDING PROCESS



**1. STUD AGAINST WORK.**



**2. STORED ENERGY DISCHARGED THROUGH SPECIAL WELD "TIMING" TIP AND STUD STARTS DOWNWARD.**



**3. STUD FORCED INTO MOLTEN METAL.**



**4. METAL SOLIDIFIES AND WELD IS COMPLETED IN MILLISECONDS.**

Capacitor Discharge (CD) Stud Welding involves the same basic principles and metallurgical aspects as any other arc welding procedure. When the MIDWEST FASTENERS weld gun is activated, a special precision weld tip initiates a controlled electric arc from the welder capacitor bank which melts the end of the stud and a portion of the base metal. The stud is held in place as the molten metal solidifies instantly accomplishing a high quality fusion weld.

CD Stud Welding is generally used to weld smaller diameter studs to thin base metals, especially where reverse side marking is not permissible. Since the entire weld cycle is completed in milliseconds, welds can be

made to thin material without pronounced distortion, burn-through or reverse side discoloration. As long as one end of stud is designed for CD welding, CD studs can be manufactured in almost any shape.

CD Stud Welding is compatible with just about any weldable material, and permits the welding of dissimilar metals.



450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)



## MIDWEST FASTENERS

### CD STUD/BASE METAL COMBINATION WELDING CAPABILITIES RECOMMENDATIONS

<b>BASE WELD SURFACE MATERIAL</b>	<b>STUD MATERIAL</b>			
	<b>MILD STEEL</b> 1008, 1010	<b>STAINLESS</b> 304, 305	<b>ALUMINUM</b> 1100, 6061	<b>BRASS</b> 70-30, 65-35
MILD STEEL 1006 through 1030	Excellent	Excellent	—	Excellent
MEDIUM CARBON STEEL 1030 through 1050	Good*	Good*	—	Good*
GALVANIZED SHEET DUCT OR DECKING	Excellent	Excellent	—	—
STRUCTURAL STEEL	Excellent	Excellent	—	Excellent
STAINLESS STEEL 405, 410, 430, and 330 Series, except 303	Excellent	Excellent	—	Excellent
LEAD FREE BRASS, ELECTROLYTIC COPPER, LEAD-FREE ROLLED COPPER	Excellent	Excellent	—	Excellent
MOST ALUMINUM ALLOYS OF THE 1100, 3000, 5000, AND 6000 SERIES**	—	—	Excellent	—
DIE-CAST ZINC ALLOYS	Good*	Good*	Excellent	Good*

\*Good: Generally full strength results, depending upon the combination of stud size and base metal.

\*\*Other materials, such as 7000 Series aluminum, titanium alloys, Inconel, etc, can be welded under specific conditions.

### CD STUD REVERSE-SIDE MARKING LIMITATIONS

The charts on the following page will be of help in determining the best combination of stud weld base size and base metal thickness. The terms on the chart are defined as follows:

EXCELLENT—No marking, excellent weld.

ACCEPTABLE—Visible markings, excellent weld.

UNACCEPTABLE—Unacceptable marking, base metal failure.

It should be noted that the MIDWEST FASTENERS charts are based on optimum laboratory conditions. Even under optimum conditions, it is difficult to determine the precise point at which reverse-side marking will appear. Therefore, these charts should be used only as a guide. For further assistance contact the MIDWEST FASTENERS Customer Service Department.





450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174


[www.midwestfasteners.com](http://www.midwestfasteners.com)

# HOW TO FIND THE OPTIMUM COMBINATION OF STUD SIZE AND BASE METAL THICKNESS IN ORDER TO PREVENT REVERSE-SIDE MARKING


## BASE METAL THICKNESS

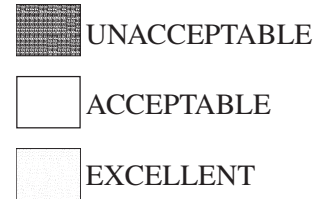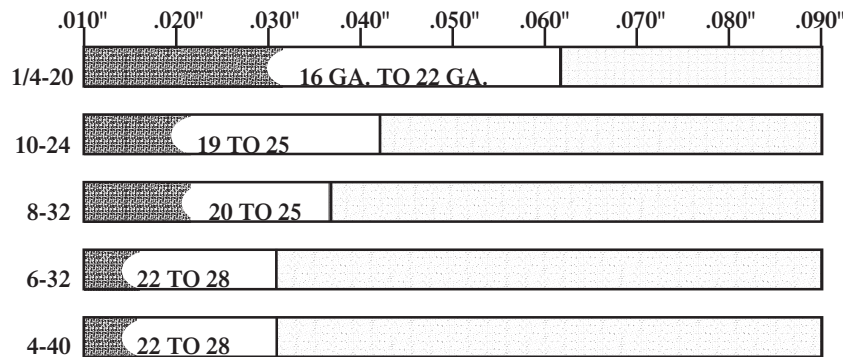

**MILD STEEL**  
 BASE METAL: Mild Steel  
 STUD: Mild Steel, Flanged or Small Flanged

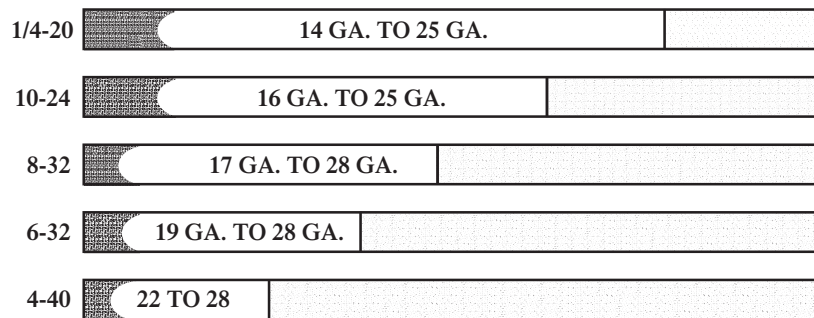

**STAINLESS STEEL**  
 BASE METAL: Stainless Steel  
 STUD: Stainless Steel, Flanged or Small Flanged

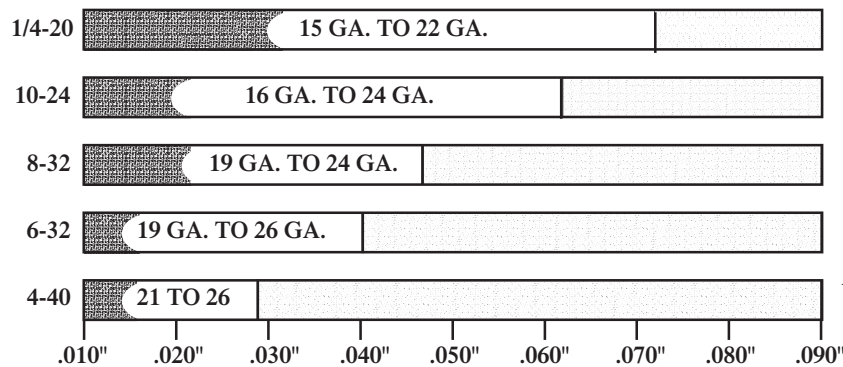

**ALUMINUM**  
 BASE METAL: Aluminum  
 STUD: Aluminum, Flanged or Small Flanged

NOTE: Stud tip size can influence the degree of reverse-side marking.




## BASE METAL THICKNESS



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)

## CD STUD WELD INSPECTION (VISUAL)

The MIDWEST FASTENERS CD stud weld can be visually inspected by observing the fillet at the base of the stud. The illustrations and comments below will assist you in visually judging the quality of the weld.

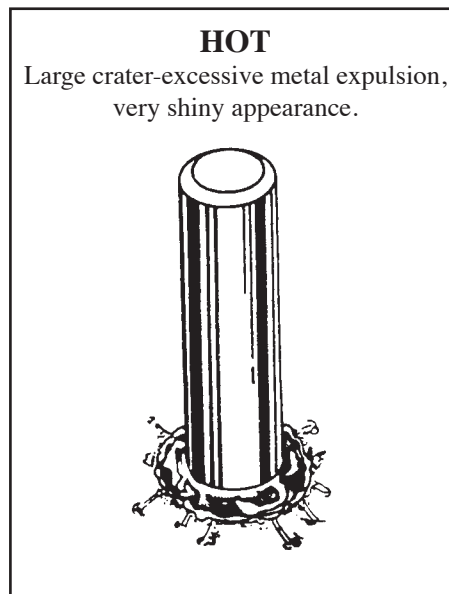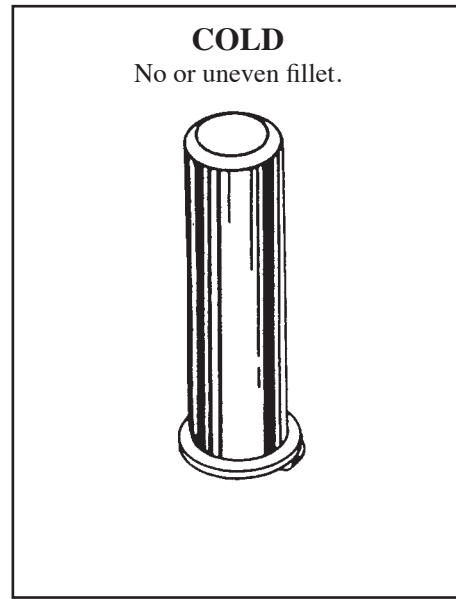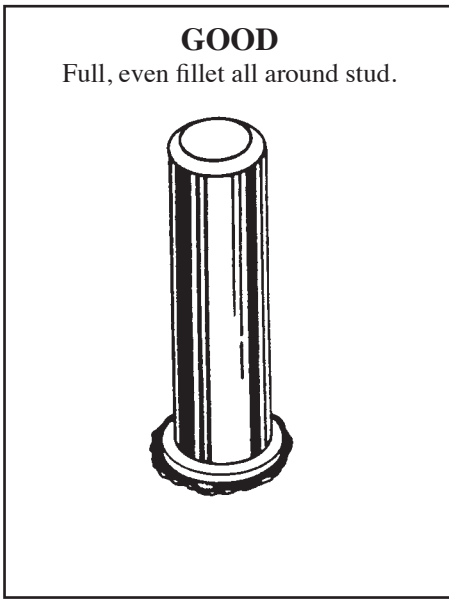

450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

## MIDWEST FASTENER CD STUD LOAD STRENGTHS

<i>STUD MATERIAL</i>	<i>STUD SIZE</i>	<i>MAXIMUM FASTENING TORQUE (Inch Lbs.)*</i>	<i>ULTIMATE TENSILE LOAD (Lbs.)</i>	<i>MAXIMUM SHEAR LOAD (Lbs.)</i>
LOW-CARBON, COPPER-FLASHED STEEL	6-32	6	500	375
	8-32	12	765	575
	10-24	14	960	720
	1/4-20	43	1750	1300
	5/16-18	72	2900	2200
	3/8-16	106	4300	3250
STAINLESS STEEL 304	6-32	10	790	590
	8-32	20	1260	940
	10-24	23	1530	1150
	1/4-20	75	2880	2160
	5/16-18	126	3750	5350
	3/8-16	185	4850	7150
ALUMINUM ALLOY 1100	6-32	2.5	200	125
	8-32	5	295	185
	10-24	6.5	380	235
	1/4-20	21.5	670	415
	5/16-18	36	1125	695
	3/8-16	53	1660	1000
ALUMINUM ALLOY 6061	6-32	6.5	350	160
	8-32	13	560	229
	10-24	19	670	310
	1/4-20	40	1240	679
	5/16-18	70.5	2025	1210
	3/8-16	100	2985	1750
BRASS 70-30 (260) 65-35 (268)	6-32	8	600	390
	8-32	16	860	560
	10-24	18.5	1040	680
	1/4-20	61	1950	1275
	5/16-18	102	3280	2140
	3/8-16	150	4800	3160

\*These values should develop fastener tension to slightly less than yield point.



450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

## CD STUDS WEIGHT CHARTS (FLANGED-STEEL)

<i>ESTIMATED WEIGHTS OF MIDWEST FASTENER THREADED STUDS IN POUNDS PER 1000 PIECES</i>						
<b>LENGTH</b>	<b>4-40</b>	<b>6-32</b>	<b>8-32</b>	<b>10-24</b>	<b>1/4-20</b>	<b>5/16-18</b>
1/4	.69	1.00	1.39	1.79	3.08	4.90
3/8	.94	1.38	1.93	2.50	4.37	6.98
1/2	1.18	1.76	2.49	3.21	5.66	9.06
5/8	1.43	2.13	3.04	3.93	6.95	11.13
3/4	1.67	2.51	3.60	4.64	8.24	13.21
7/8	1.92	2.89	4.15	5.35	9.52	15.29
1	2.16	3.26	4.71	6.07	10.81	17.36
1-1/4	2.65	4.02	5.82	7.50	13.39	21.52
1-1/2	3.15	4.77	6.93	8.92	15.96	25.67
1-3/4	3.64	5.52	8.04	10.35	18.54	29.83
2	4.13	6.27	9.15	11.78	21.12	33.98
2-1/4	4.62	7.03	10.26	13.21	23.69	38.14
2-1/2	5.11	7.78	11.37	14.63	27.27	42.29
<b>EACH ADD'L INCH</b>	<b>1.96</b>	<b>3.01</b>	<b>4.44</b>	<b>5.71</b>	<b>10.31</b>	<b>16.62</b>


<i>ESTIMATED WEIGHTS OF MIDWEST FASTENER NON-THREADED STUDS IN POUNDS PER 1000 PIECES</i>						
<b>LENGTH</b>	<b>3/32</b>	<b>1/8</b>	<b>5-32</b>	<b>3/16</b>	<b>1/4</b>	<b>5/16</b>
1/4	.68	1.06	1.59	2.24	3.87	5.97
3/8	.92	1.50	2.27	3.21	5.61	8.68
1/2	1.16	1.93	2.94	4.19	7.35	11.39
5/8	1.40	2.37	3.62	5.16	9.09	14.11
3/4	1.64	2.80	4.30	6.14	10.84	16.82
7/8	1.88	3.24	4.98	7.12	12.56	19.53
1	2.12	3.67	5.65	8.09	14.32	22.25
1-1/4	2.60	4.54	7.01	10.04	17.81	27.67
1-1/2	3.08	5.41	8.36	11.99	21.69	33.10
1-3/4	3.56	6.28	9.72	13.95	24.78	38.52
2	4.04	7.15	11.07	15.90	28.26	43.95
2-1/4	4.52	8.02	12.43	17.85	31.75	49.37
2-1/2	5.00	8.89	13.78	19.80	35.23	54.80
<b>EACH ADD'L INCH</b>	<b>1.92</b>	<b>3.48</b>	<b>5.42</b>	<b>7.81</b>	<b>13.94</b>	<b>21.70</b>



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

## FLANGED ANNULAR RING (NAVY)

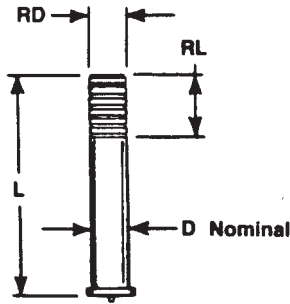

STUD			
NOM	MIN.		
D	L	RD	RL
1/8	3/4	.122	.312
3/16	3/4	.175	.312


<p><b>MATERIAL:</b>    <b>LOW CARBON STEEL</b> CONFORMS TO MIL-S-24149 Type: VI Class: III</p>	<p><b>STAINLESS STEEL</b> CONFORMS TO MIL-S-24149 Type: VIII Class: III</p>						
<p><b>MECHANICAL PROPERTIES:</b></p> <table style="width: 100%; border: none;"> <tr> <td style="padding-left: 20px;">Tensile</td> <td>60,000 psi (min.)</td> </tr> <tr> <td style="padding-left: 20px;">Yield</td> <td>50,000 psi (min.)</td> </tr> <tr> <td style="padding-left: 20px;">Elongation</td> <td>20% (in 2 inches)</td> </tr> </table>	Tensile	60,000 psi (min.)	Yield	50,000 psi (min.)	Elongation	20% (in 2 inches)	<p>Values for various grades available upon request.</p>
Tensile	60,000 psi (min.)						
Yield	50,000 psi (min.)						
Elongation	20% (in 2 inches)						
<p><b>PLATING:</b>        Copper coating is standard.</p>	<p>Does not apply to Stainless Steel.</p>						

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code..... CD F-AR
2. Diameter..... D
3. Length ..... L
4. Material .....

## MCAL

### “Mushroom Cap” (Aluminum)

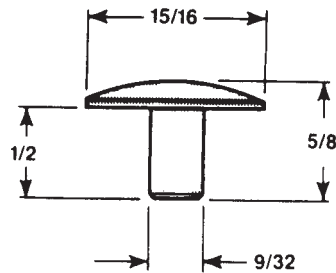

STUD SIZE	CAP PART NO.
3/16	MCAL-625-875


**NOTE:** AR CAP is sold separately. Not a component part of stud.



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

## FLANGED

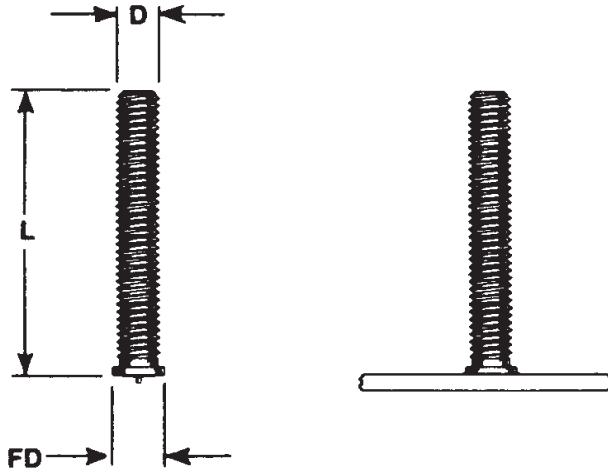

STUD		
D	FD	MIN. L
4-40	.187	.250
6-32	.218	.250
8-32	.250	.250
10-32	.250	.250
10-24	.250	.250
1/4-20	.312	.375
5/16	.375	.500
3/8-16	.437	.500

<b>MATERIAL:</b> <b>LOW CARBON STEEL</b> C - 0.23% max.    P - 0.04% max. Mn - 0.90% max.    S - 0.05% max.	<b>STAINLESS STEEL</b> AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b> Tensile            60,000 psi (min.) Yield                50,000 psi (min.) Elongation        20% (in 2 inches)	Values for various grades available upon request.
<b>PLATING:</b> Copper plating is standard.	Does not apply to Stainless.
<b>ANNEALING:</b> Studs are annealed where required.	Studs are annealed where required.
<b>MATERIAL:</b> <b>ALUMINUM</b> ALLOY — 1100 & 5000 series Other alloys available upon request.	<b>BRASS</b> ALLOY — (lead free) 70-30 std. Other alloys available upon request.
<b>MECHANICAL PROPERTIES:</b> Values for various alloys available upon request.	Values for various alloys available upon request.


**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....CD F
2. Diameter.....D
3. Length ..... L
3. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com

## FLANGED/METRIC

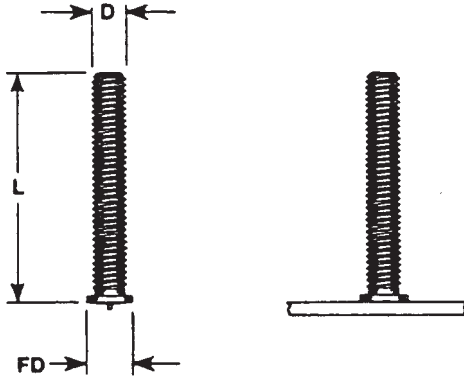

STUD		
D	FD	MIN. L
M3 X .50	5.5	6
M4 X .70	6.4	6
M5 X .80	6.8	10
M6 X 1.00	8	10
M8 X 1.25	9.8	12

\*All dimensions in millimeters

<b>MATERIAL:</b> <b>LOW CARBON STEEL</b> C - 0.23% max.    P - 0.04% max. Mn - 0.90% max.    S - 0.05% max.	<b>STAINLESS STEEL</b> AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b> Tensile            60,000 psi (min.) Yield                50,000 psi (min.) Elongation        20% (in 2 inches)	Values for various grades available upon request.
<b>PLATING:</b> Copper plating is standard.	Does not apply to Stainless.
<b>ANNEALING:</b> Studs are annealed where required.	Studs are annealed where required.
<b>MATERIAL:</b> <b>ALUMINUM</b> ALLOY— 1100 & 5000 series Other alloys available upon request.	<b>BRASS</b> ALLOY— (lead free) 70-30 std. Other alloys available upon request.
<b>MECHANICAL PROPERTIES:</b> Values for various alloys available upon request.	Values for various alloys available upon request.

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....CD F
2. Diameter.....D
3. Length ..... L
3. Material .....




450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com



## SMALL FLANGED

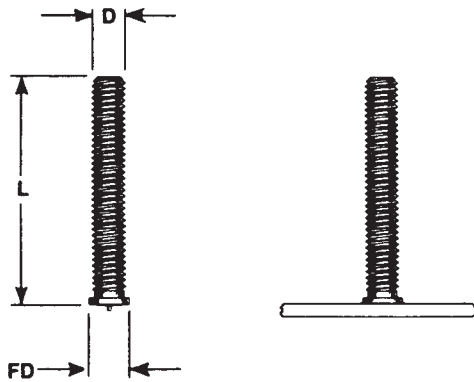

STUD		
D	FD	MIN. L
4-40	.143	.250
6-32	.169	.250
8-32	.195	.250
10-32	.221	.250
10-24	.221	.250
1/4-20	.281	.375
5/16-18	.342	.500

<b>MATERIAL:</b> <b>LOW CARBON STEEL</b> C - 0.23% max.    P - 0.04% max. Mn - 0.90% max.    S - 0.05% max.	<b>STAINLESS STEEL</b> AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b> Tensile            60,000 psi (min.) Yield                50,000 psi (min.) Elongation        20% (in 2 inches)	Values for various grades available upon request.
<b>PLATING:</b> Copper plating is standard.	Does not apply to Stainless.
<b>ANNEALING:</b> Studs are annealed where required.	Studs are annealed where required.
<b>MATERIAL:</b> <b>ALUMINUM</b> ALLOY—1100 & 5000 series Other alloys available upon request.	<b>BRASS</b> ALLOY—(lead free) 70-30 std. Other alloys available upon request.
<b>MECHANICAL PROPERTIES:</b> Values for various alloys available upon request.	Values for various alloys available upon request.


**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....CD SF
2. Diameter.....D
3. Length ..... L
3. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)

## NON FLANGED

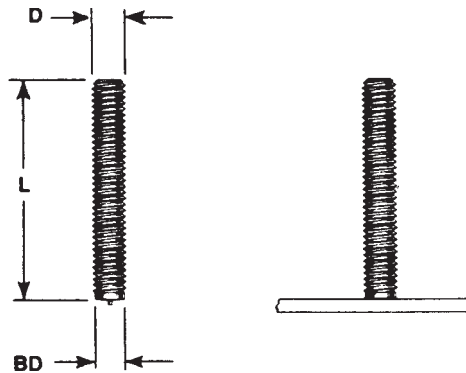

STUD		
D	MAX. BD	MIN. L
4-40	.116	.250
6-32	.142	.250
8-32	.168	.250
10-32	.194	.250
10-24	.194	.250
1/4-20	.252	.375
5/16-18	.315	.500

<p><b>MATERIAL: LOW CARBON STEEL</b>                      C - 0.23% max.    P - 0.04% max.                      Mn - 0.90% max.    S - 0.05% max.</p>	<p><b>STAINLESS STEEL</b>                      AISI grade - 302/304/305 std.                      Other grades available upon request.</p>
<p><b>MECHANICAL PROPERTIES:</b>                      Tensile            60,000 psi (min.)                      Yield                50,000 psi (min.)                      Elongation        20% (in 2 inches)</p>	<p>Values for various grades available upon request.</p>
<p><b>PLATING:</b>        Copper plating is standard.</p>	<p>Does not apply to Stainless.</p>
<p><b>ANNEALING:</b>    Studs are annealed where required.</p>	<p>Studs are annealed where required.</p>
<p><b>MATERIAL: ALUMINUM</b>                      ALLOY—1100 &amp; 5000 series                      Other alloys available upon request.</p>	<p><b>BRASS</b>                      ALLOY—(lead free) 70-30 std.                      Other alloys available upon request.</p>
<p><b>MECHANICAL PROPERTIES:</b>                      Values for various alloys available upon request.</p>	<p>Values for various alloys available upon request.</p>


**TO ORDER OR SPECIFY, GIVE:**

1. Product Code..... CD NF
2. Diameter..... D
3. Length ..... L
3. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)

## FLANGED—NO THREAD

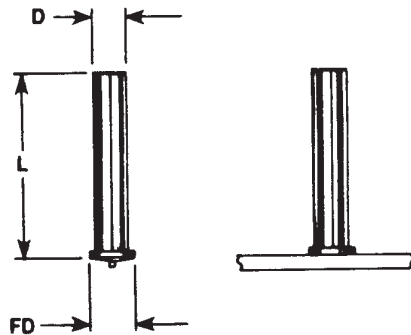

STUD		
D	FD	MIN. L
.115	3/32	.174
		.203
.141	1/8	.187
		.218
.161	5/32	.250
		.250
.215	3/16	.250
		.312
.273	1/4	.312
		.375
	5/16	.375
		.500

<b>MATERIAL:</b> <b>LOW CARBON STEEL</b> C - 0.23% max.    P - 0.04% max. Mn - 0.90% max.    S - 0.05% max.	<b>STAINLESS STEEL</b> AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b> Tensile            60,000 psi (min.) Yield                50,000 psi (min.) Elongation        20% (in 2 inches)	Values for various grades available upon request.
<b>PLATING:</b> Galvanized and Copper plating are available.	Does not apply to Stainless.
<b>ANNEALING:</b> Studs are annealed where required.	Studs are annealed where required.
<b>MATERIAL:</b> <b>ALUMINUM</b> ALLOY—1100 & 5000 series Other alloys available upon request.	<b>BRASS</b> ALLOY—(lead free) 70-30 std. Other alloys available upon request.
<b>MECHANICAL PROPERTIES:</b> Values for various alloys available upon request.	Values for various alloys available upon request.

**TO ORDER OR SPECIFY, GIVE:**


1. Product Code..... CD F-NT
2. Diameter..... D
3. Length ..... L
3. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com

## SMALL FLANGED— NO THREAD STUD

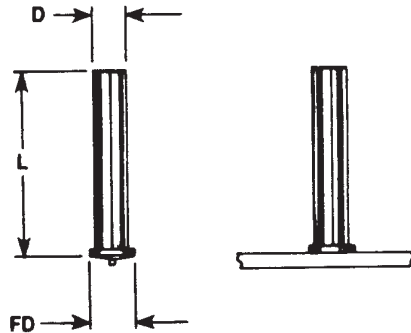

D	FD	MIN. L
.115	3/32	.143
.141	1/8	.156
.161	5/32	.195
.215	3/16	.221
.273	1/4	.281
	5/16	.343
		.500

<b>MATERIAL: LOW CARBON STEEL</b> C - 0.23% max.    P - 0.04% max. Mn - 0.90% max.    S - 0.05% max.		<b>STAINLESS STEEL</b> AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b> Tensile            60,000 psi (min.) Yield                50,000 psi (min.) Elongation        20% (in 2 inches)		Values for various grades available upon request.
<b>PLATING:</b>	Galvanized and Copper plating are available.	Does not apply to Stainless.
<b>ANNEALING:</b>	Studs are annealed where required.	Studs are annealed where required.
<b>MATERIAL: ALUMINUM</b> ALLOY—1100 & 5000 series Other alloys available upon request.		<b>BRASS</b> ALLOY—(lead free) 70-30 std. Other alloys available upon request.
<b>MECHANICAL PROPERTIES:</b> Values for various alloys available upon request.		Values for various alloys available upon request.


**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....CD SF-NT
2. Diameter.....D
3. Length ..... L
3. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)

**NON FLANGED—  
NO THREAD  
STUD**

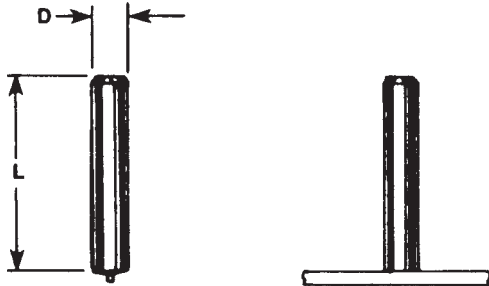

	<b>D</b>	<b>MIN. L</b>
	3/32	.250
.115		.250
	1/8	.250
.141		.250
	5/32	.250
.161		.250
	3/16	.250
.215		.250
	1/4	.375
.276		.375
	5/16	.500

<b>MATERIAL:</b> <b>LOW CARBON STEEL</b> C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	<b>STAINLESS STEEL</b> AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b> Tensile 60,000 psi (min.) Yield 50,000 psi (min.) Elongation 20% (in 2 inches)	Values for various grades available upon request.
<b>PLATING:</b> Galvanized and Copper plating are available.	Does not apply to Stainless.
<b>ANNEALING:</b> Studs are annealed where required.	Studs are annealed where required.
<b>MATERIAL:</b> <b>ALUMINUM</b> ALLOY—1100 & 5000 series Other alloys available upon request.	<b>BRASS</b> ALLOY—(lead free) 70-30 std. Other alloys available upon request.
<b>MECHANICAL PROPERTIES:</b> Values for various alloys available upon request.	Values for various alloys available upon request.


**TO ORDER OR SPECIFY, GIVE:**

1. Product Code..... CD NF-NT
2. Diameter.....D
3. Length ..... L
3. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com

## DRAWN ARC

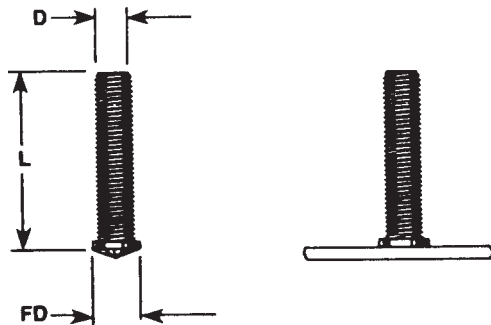

STUD		
D	FD	MIN. L
4-40	.143	.250
6-32	.169	.250
8-32	.195	.250
10-32	.221	.250
10-24	.221	.250
1/4-20	.281	.375

<b>MATERIAL:</b> <b>LOW CARBON STEEL</b> C - 0.23% max.    P - 0.04% max. Mn - 0.90% max.    S - 0.05% max.	<b>STAINLESS STEEL</b> AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b> Tensile            60,000 psi (min.) Yield              50,000 psi (min.) Elongation        20% (in 2 inches)	Values for various grades available upon request.
<b>PLATING:</b> Galvanized and Copper plating are available.	Does not apply to Stainless.
<b>ANNEALING:</b> Studs are annealed where required.	Studs are annealed where required.
<b>MATERIAL:</b> <b>ALUMINUM</b> ALLOY— 1100 & 5000 series Other alloys available upon request.	<b>BRASS</b> ALLOY— (lead free) 70-30 std. Other alloys available upon request.
<b>MECHANICAL PROPERTIES:</b> Values for various alloys available upon request.	Values for various alloys available upon request.



**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....CD DA
2. Diameter.....D
3. Length ..... L
3. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)

## DRAWN ARC— NO THREAD STUD

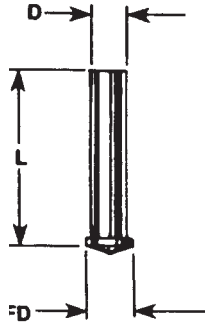

D	FD	MIN. L
3/32	.143	.250
.115	.171	.250
1/8	.156	.250
.141	.195	.250
5/32	.221	.250
.161	.221	.250
3/16	.221	.250
.215	.281	.312
1/4	.218	.312

<p><b>MATERIAL: LOW CARBON STEEL</b> C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.</p>	<p><b>STAINLESS STEEL</b> AISI grade - 302/304/305 std. Other grades available upon request.</p>
<p><b>MECHANICAL PROPERTIES:</b> Tensile 60,000 psi (min.) Yield 50,000 psi (min.) Elongation 20% (in 2 inches)</p>	<p>Values for various grades available upon request.</p>
<p><b>PLATING:</b> Galvanized and Copper plating are available.</p>	<p>Does not apply to Stainless.</p>
<p><b>ANNEALING:</b> Studs are annealed where required.</p>	<p>Studs are annealed where required.</p>
<p><b>MATERIAL: ALUMINUM</b> ALLOY—1100 &amp; 5000 series Other alloys available upon request.</p>	<p><b>BRASS</b> ALLOY—(lead free) 70-30 std. Other alloys available upon request.</p>
<p><b>MECHANICAL PROPERTIES:</b> Values for various alloys available upon request.</p>	<p>Values for various alloys available upon request.</p>

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....CD DA-NT
2. Diameter.....D
3. Length ..... L
3. Material .....




450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

# BI-METALLIC STUDS

**BMWP**

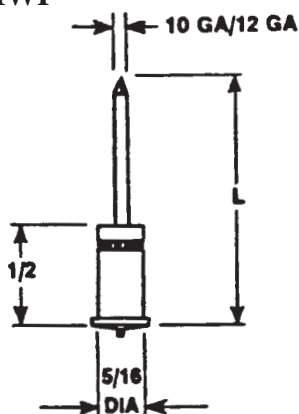

## PIN BI-METALLIC STUD


**MATERIAL:** Pin— 10 GA (.135 Dia.) Stainless Steel  
 12 GA (.105 Dia.) Stainless Steel  
 Base— Aluminum (5000 Series)

**WASHER:** Self-locking washers are available in a variety of sizes, shapes and materials.

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....BMWP
2. Length ..... L

**BMAR**

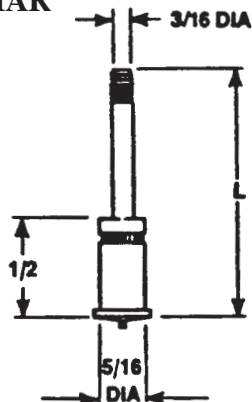

## ANNULAR RING BI-METALLIC STUD


**MATERIAL:** Pin— Stainless Steel  
 Base— Aluminum (5000 Series)

**CAP:** The cap for use with this stud is the WCN AR CAP annular ring cap.

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....BMAR
2. Length ..... L

**BMNE**

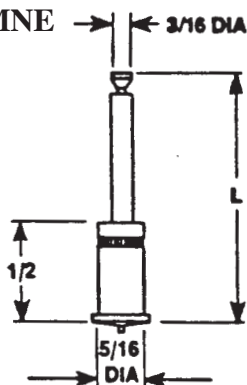

## NOTCHED END BI-METALLIC STUD

**MATERIAL:** Pin— Stainless Steel  
 Base— Aluminum (5000 Series)

**WASHER:** The washer for use with this stud is the WAK notched end key hole slotted washer.

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code..... BMNE
2. Length ..... L




450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com



# FLANGED-ACOUSTICAL HANGER (LAGGING STUD)

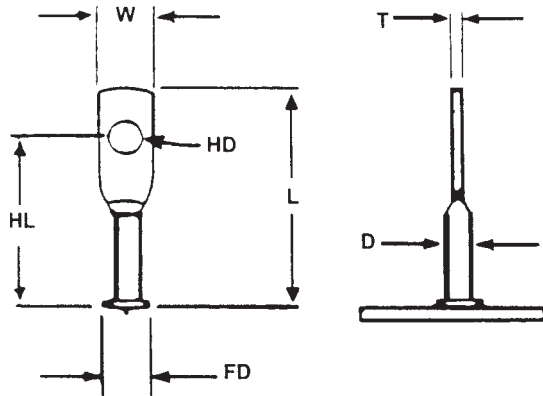

STUD						
D	L	FD	HD	HL	W	T
.168	1-1/8	.250	.187	7/8	5/16	1/16
.214	1-1/8	.312	.187	7/8	3/8	5/64

<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b> C - 0.23% max.    P - 0.04% max. Mn - 0.90% max.    S - 0.05% max.	<b>STAINLESS STEEL</b> AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b>	Tensile            60,000 psi (min.) Yield                50,000 psi (min.) Elongation        20% (in 2 inches)	Values for various grades available upon request.
<b>PLATING:</b>	Copper plating is standard.	Does not apply to Stainless.
<b>ANNEALING:</b>	Studs are annealed where required.	Studs are annealed where required.
<b>MATERIAL:</b>	<b>ALUMINUM</b> ALLOY—1100 & 5000 series Other alloys available upon request.	
<b>MECHANICAL PROPERTIES:</b>	Values for various alloys available upon request.	

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....CD F-AH
2. Diameter.....D
3. Length ..... L
3. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)

# SPECIAL CAPACITOR DISCHARGE WELD STUDS

From an .060" diameter no-thread CD stud to a 7/16" hex CD stud, **MIDWEST FASTENERS** can manufacture a special CD stud to meet your precision fastening requirements. The illustrations below indicate just a few of the possible configurations in which CD studs can be manufactured. These illustrations; however, do not

represent any standard **MIDWEST FASTENERS** in-stock product line. If you require a special configuration CD stud for your application, please submit a sketch or drawing with dimensions and material requirements to **MIDWEST FASTENERS** for a quote.




**NON-  
FLANGED**



**SMALL-  
FLANGED**



**FLANGED**

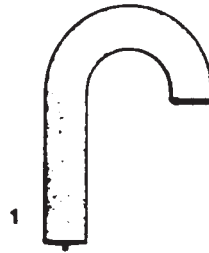

**1**



**2**



**3**



**4**



**5**



**6**



**7**



**8**



**9**



**10**



**11**



**12**



**13**



**14**




**15**




**16**



**17**



**18**



**19**



**20**



## THE ARC STUD WELDING PROCESS



**1. STUD AND CERAMIC FERRULE  
AGAINST THE WORK PLATE**



**2. STUD LIFTS AND ARC IS DRAWN**



**3. CONTROL TIMES OUT AND STUD  
PLUNGES INTO MOLTEN STEEL**



**4. METAL SOLIDIFIES AND WELD IS  
COMPLETED IN MILLISECONDS**

ARC Stud Welding involves the same basic principles and metallurgical aspects as any other arc welding procedure. The weld gun lifts the stud a short distance from the base metal and initiates a controlled electric arc from the power source which melts the end of the stud and a portion of the base metal. The ceramic ferrule contains the molten metal into which the stud is thrust automatically and a high quality fusion weld is accomplished.

ARC Stud Welding is generally used to weld larger diameter studs to thick base metals. ARC studs may be almost any shape and there are literally hundreds; however, they must have one end of the stud designed for ARC welding and must be made of weldable materials. Mild steel, stainless steel, and aluminum are applicable materials for ARC stud welding.


Contact MIDWEST FASTENERS Customer Service Department for technical assistance in non-standard arc stud fastener design.



**MIDWEST  
FASTENERS, INC.**  
450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

# MIDWEST FASTENERS, INC. WELDED STEEL ARC STUDS TENSILE & TORQUE STRENGTHS

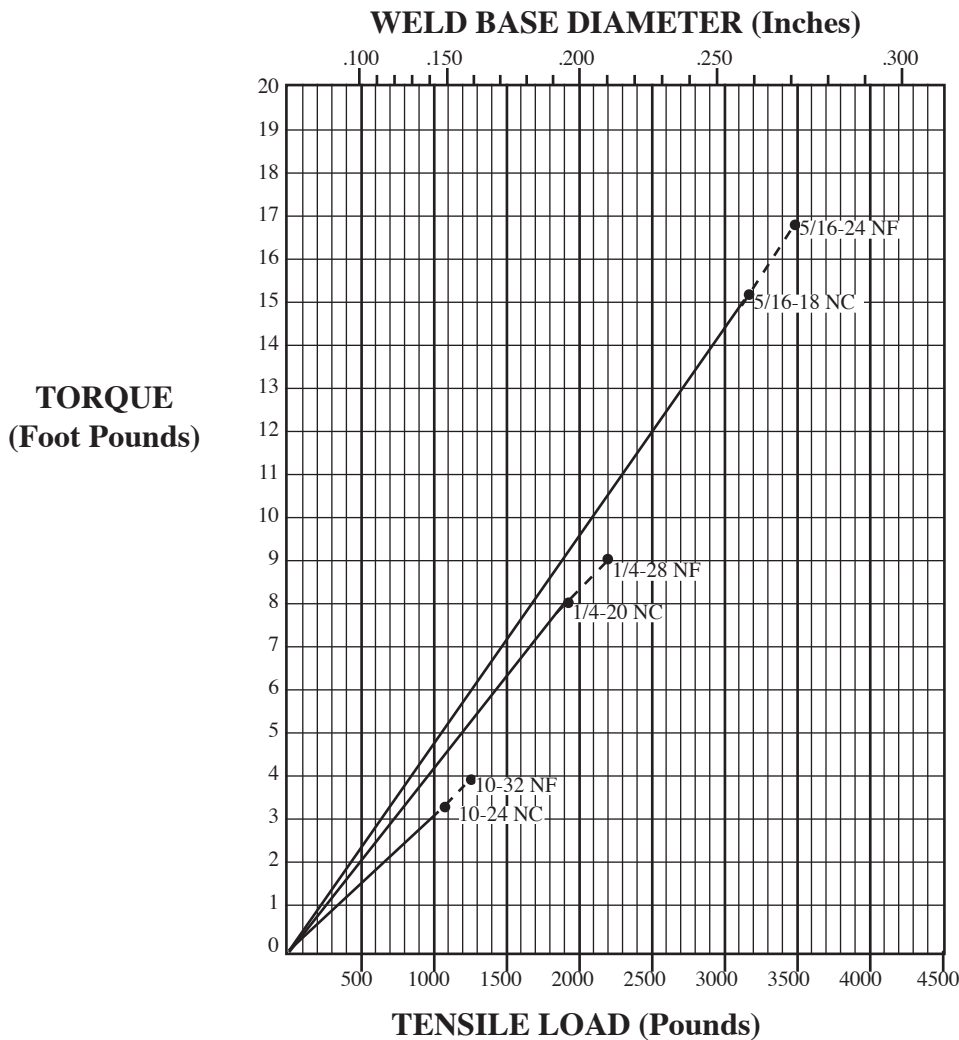

Graphs are based on 60,000 psi strength steel.

Of course, in actual practice, a stud should never be used at its yield load. A factor of safety must be applied. It is generally recommended that studs be used at no more than 60% of yield. However, the factor of safety may vary up or down, depending of the particular application. The user will make this determination. If further assistance is needed, contact MIDWEST FASTENERS Customer Service Department.



Scale along the top of each graph represents weld base diameter in inches, while the one at the graph's bottom edge shows tensile load in pounds. A separate line is plotted for each thread diameter. The solid portion of each line terminates at a small dot which represents the tensile yield of the national course thread. A dashed line is then extended to a second dot at the tensile yield load of the national fine thread.



450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)


# MIDWEST FASTENERS, INC. WELDED STEEL ARC STUDS TENSILE & TORQUE STRENGTHS

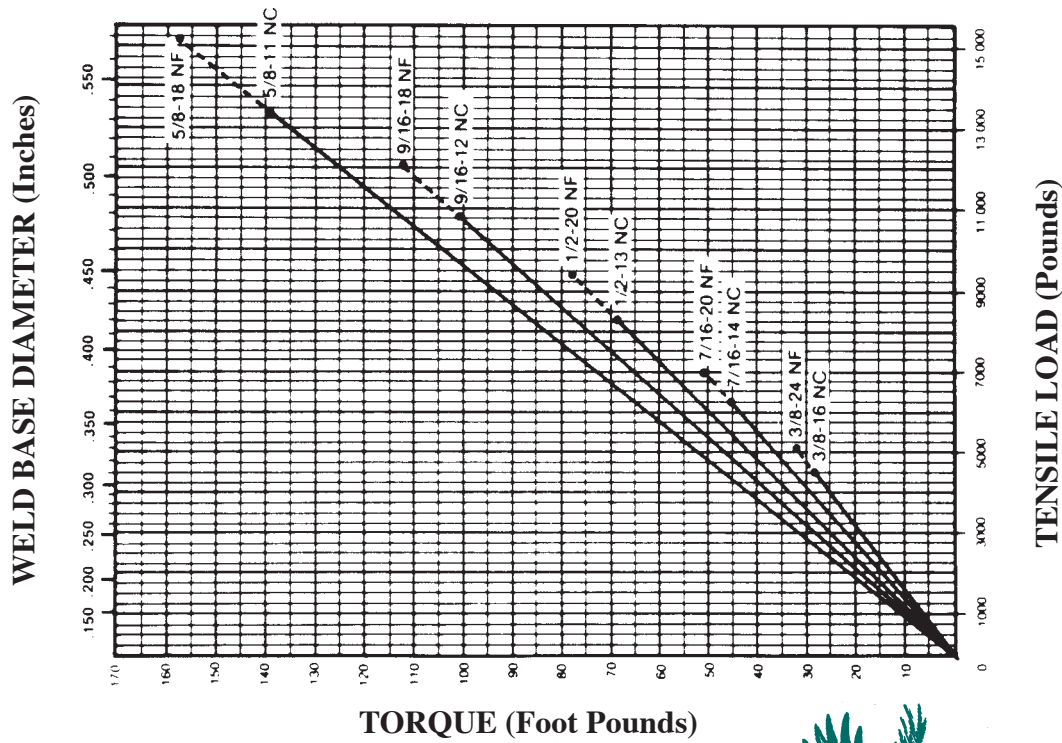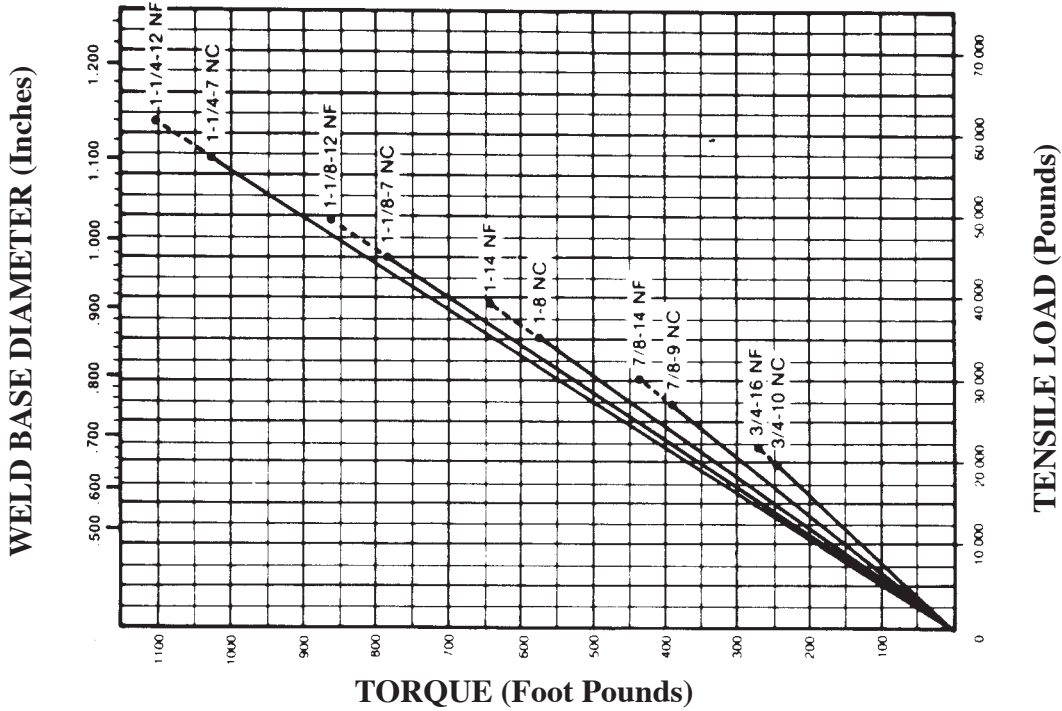

450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

## ARC STUD WELD FILLET ACCOMMODATION

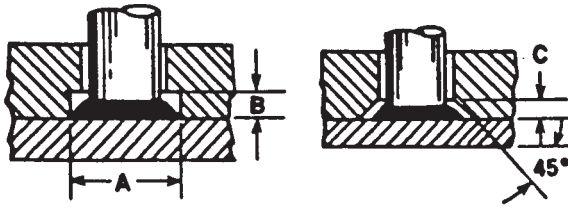


### COUNTER BORE OR COUNTER SINK METHODS


When an arc stud is welded, a fillet forms around its base with the fillet dimensions being closely controlled by the design of the ferrule used. Since the diameter of the fillet is generally larger than the diameter of the stud, some consideration is required in the design of mating parts. MIDWEST FASTENERS recommends a counter bore and counter sink method for this application. Dimensions will vary with studs and ferrules. Additional methods of accommodating fillet include over-sized clearance holes, use of a gasket material around the fillet or use of a dog type construction.

STUD SIZE (in.)	COUNTERBORE (in.)		90° COUNTERSINK (in.)
	A	B	
1/4	0.437	0.125	0.125
5/16	0.500	0.125	0.125
3/8	0.593	0.125	0.125
7/16	0.656	0.187	0.125
1/2	0.750	0.187	0.187
5/8	0.875	0.218	0.187
3/4	1.125	0.312	0.187


### SEVERAL OPTIONAL METHODS OF FILLET ACCOMMODATION:

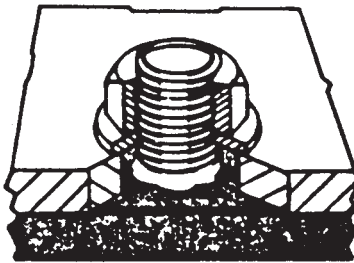


(A) OVERSIZE  
CLEARANCE HOLE

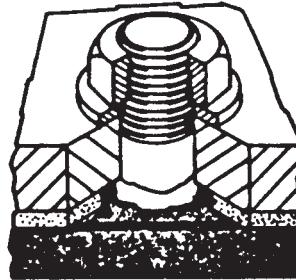

(B) GASKET  
MATERIAL

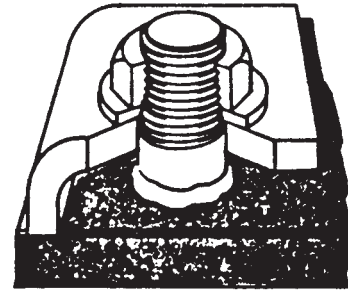

(C) DOG CLAMP

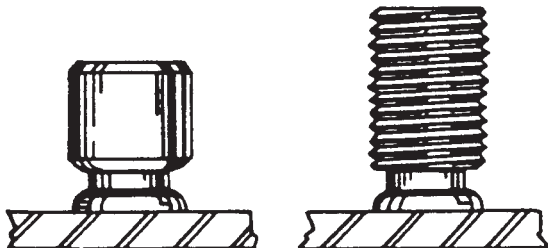

### IF AN OVERSIZE FILLET DOES NOT MEET THE APPLICATION:

A MIDWEST FASTENERS weld stud designed with a reduced weld base is available so that the weld fillet does not exceed the maximum diameter of fastener. This design is not recommended if full fastener strength is important.




450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)

## ARC STUD LOCATION TEMPLATE & BUSHING DESIGN


### TEMPLATE METHOD

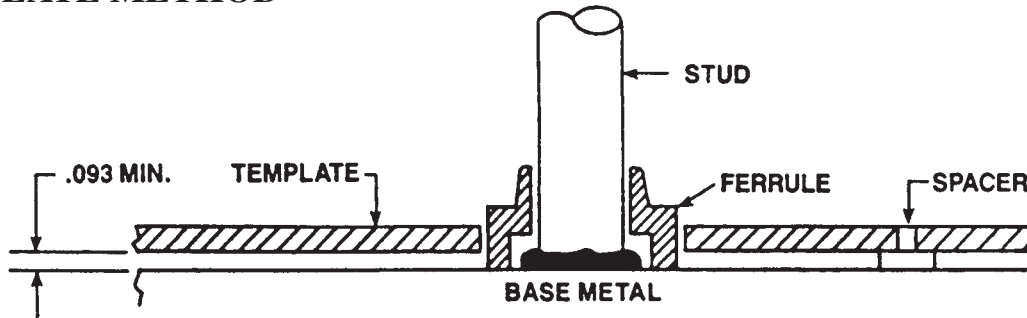

This method of templating is recommended by MIDWEST FASTENERS for use with ferrules. The template is usually a steel plate 3/32" to 3/16" thick. Spacers are required to allow the gases to escape during the welding cycle. The ferrule can be held by a standard ferrule grip or where clearance is prohibitive a tube type set-up can be used. The recommended hole sizes on the template to locate the

ferrules should equal the maximum outside diameter of the ferrule plus 1/32". Holes may be drilled or bored at required locations. See stud specification sheets for ferrule details. For further assistance contact the MIDWEST FASTENERS Customer Service Department.

### BUSHING METHOD

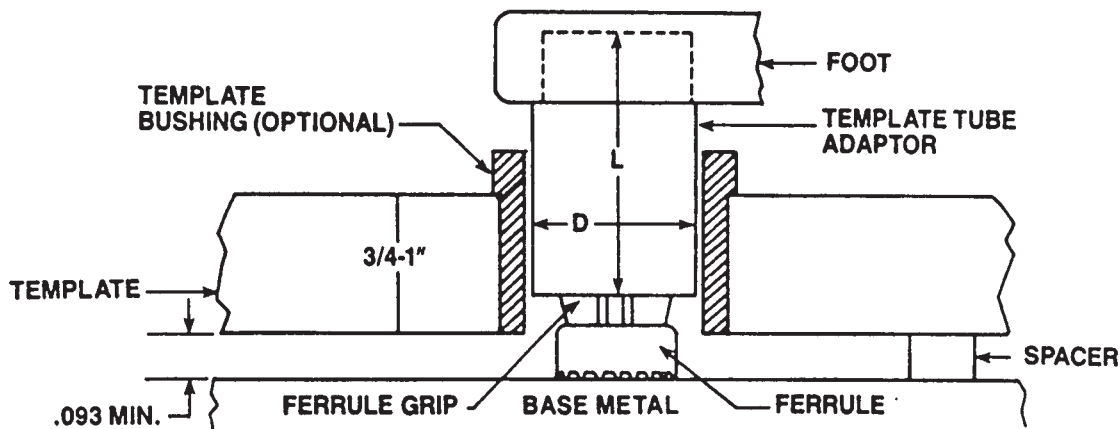

This method of templating is recommended by MIDWEST FASTENERS for use with all arc stud styles. The design makes it possible to accurately hold angular alignment of the studs as well as stud location. The template should be made of ebonite or masonite of a thickness sufficient to afford good alignment. Template bushings may be used to insure greater accuracy and extend the life of the template. Standard ferrule grips are used with the tube adaptor. This permits standardization of templates since it is only necessary to change the ferrule grip to weld studs of different diameters. The hole diameter of the

bushing or template should be approximately .010 larger than the maximum outside diameter of the template tube adaptor.

STUD Size	D	L
1/2" and under	1.250	2.000
5/8" and 3/4"	1.562	2.500
7/8" and larger	2.125	2.500




450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)



## ARC STUD LOCATION TEMPLATE & BUSHING DESIGN


### ARC STUD WELD INSPECTION (VISUAL)

The MIDWEST FASTENERS ARC stud weld can be visually inspected by observing the fillet at the base of the stud. The illustrations and comments below will assist you in visually judging the quality of the weld.

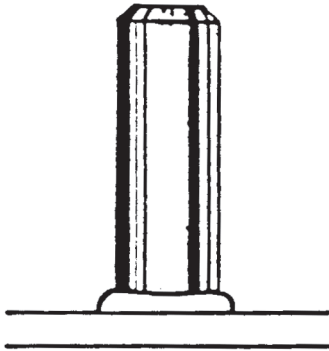


#### GOOD WELD

Full, even, shiny fillet all around stud.

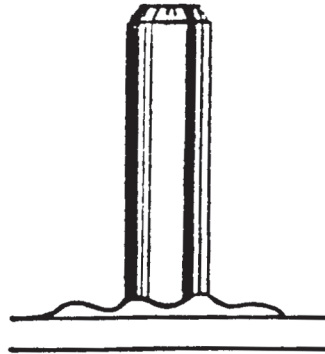


#### HOT WELD

Very shiny, low profile fillet extending beyond outside of ferrule.

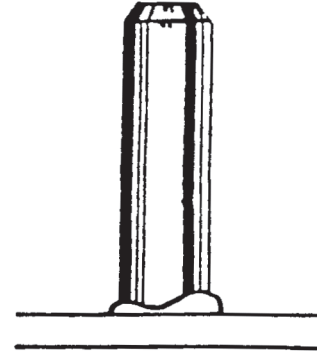


#### COLD WELD

Small, uneven, dull appearing fillet with fingers of metal extending through vents of ferrule.

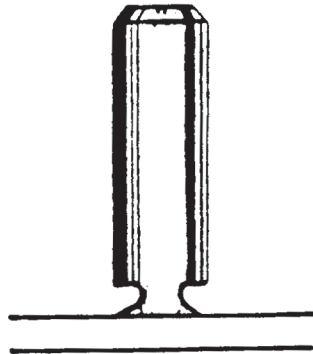

#### SHORT PLUNGE OR HANG-UP

No fillet, no stud burn-off, or undercut base.

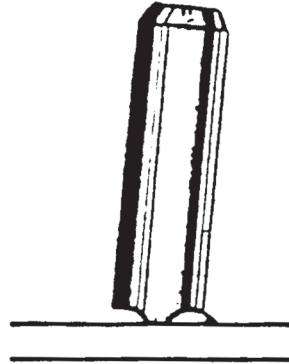

#### MISALIGNMENT

Partial or no fillet, undercut, stud not perpendicular to base metal.



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

[www.midwestfasteners.com](http://www.midwestfasteners.com)




## ARC STUD WELDING RECOMMENDED MINIMUM BASE METAL THICKNESS

STUD WELD BASE DIA. (in.)	STEEL		ALUMINUM	
	WITHOUT BACKUP (in.)	(gage)	WITHOUT BACKUP (in.)	WITH BACKUP (in.)
0.187	0.0359	20	0.125	0.125
0.250	0.0478	18	0.125	0.125
0.312	0.0598	16	0.187	0.125
0.375	0.0747	14	0.187	0.187
0.437	0.0897	13	0.250	0.187
0.500	0.1196	11	0.250	0.250
0.625	0.148	9		
0.750	0.187			
0.875	0.250			
1.000	0.375			

## ARC STUD WELDING DC POWER SUPPLY REQUIREMENTS

POWER SUPPLY (NEMA RATED)	STUD WELD BASE DIAMETER IN INCHES
------------------------------	-----------------------------------

400 AMP UNIT  
 600 AMP UNIT  
 TWO-400 AMP UNITS IN PARALLEL  
 TWO-600 AMP UNITS IN PARALLEL  
 OR ONE MIDWEST FASTENERS UA-1800-PS  
 ONE-2000 AMP UNIT  
 OR ONE MIDWEST FASTENERS UA-2500-PS  
 TWO-2000 AMP UNITS IN PARALLEL  
 OR TWO MIDWEST FASTENERS UA-2500-PS'S  
 IN PARALLEL

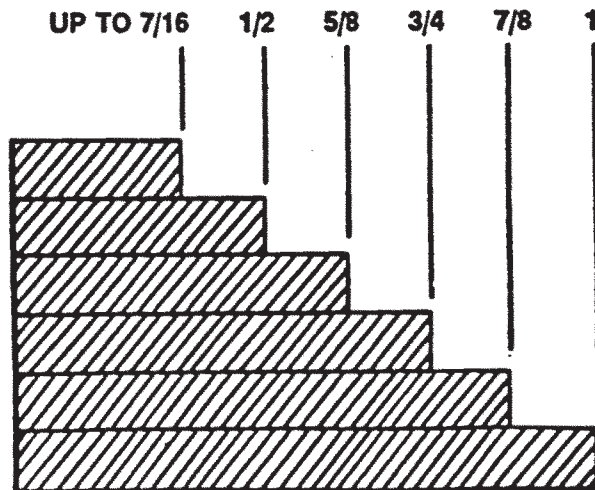

450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
[www.midwestfasteners.com](http://www.midwestfasteners.com)

## ARC STUDS WEIGHT CHARTS (STEEL)

MIDWEST FASTENERS ESTIMATED WEIGHTS OF THREADED STUDS IN POUNDS PER 1000 PIECES								
LENGTH	1/4-20	5/16-18	3/8-16	7/16-14	1/2-13	5/8-11	3/4-10	7/8-9
3/4	8.3	12.8	18.8	25.5	34.5			
1	11.0	17.0	25.0	34.0	46.0	70.0		
1-1/4	13.8	21.3	31.3	42.5	57.5	87.5	133.8	
1-1/2	16.5	25.5	37.5	51.0	69.0	105.0	160.5	243.8
1-3/4	19.3	29.8	43.8	59.5	80.5	122.5	187.3	284.4
2	22.0	34.0	50.0	68.0	92.0	140.0	214.0	325.0
2-1/4	24.8	38.3	56.3	76.5	103.5	157.5	240.8	165.6
2-1/2	27.5	42.5	62.5	85.0	115.0	175.0	267.5	406.3
2-3/4	30.3	46.8	68.8	93.5	126.5	192.5	294.3	446.9
3	33.0	51.0	75.0	102.0	138.0	210.0	321.0	487.5
3-1/4	35.8	55.3	81.3	110.5	149.5	227.5	347.8	528.1
3-1/2	38.5	59.5	87.5	119.0	161.0	245.0	374.5	568.8
3-3/4	41.3	63.8	93.8	127.5	172.5	262.5	401.3	609.4
4	44.0	68.0	100.0	136.0	184.0	280.0	428.0	650.0
4-1/4	46.8	72.3	106.3	144.5	195.5	297.5	454.8	690.6
4-1/2	49.5	76.5	112.5	153.0	207.0	315.0	481.5	731.3
4-3/4	52.3	80.8	118.8	161.5	218.5	332.5	508.3	771.9
5	55.0	85.0	125.0	170.0	230.0	350.0	535.0	812.5
EACH ADD'L. INCH "P" FERRULE	11.0 1.8	17.0 2.8	25.0 3.1	34.0 4.5	46.0 5.9	70.0 10.8	107.0 21.9	162.5 39.0


MIDWEST FASTENERS ESTIMATED WEIGHTS OF NO-THREAD STUDS IN POUNDS PER 1000 PIECES									
LENGTH	3/16 dia.	1/4 dia.	5/16 dia.	3/8 dia.	7/16 dia.	1/2 dia.	5/8 dia.	3/4 dia.	7/8 dia.
3/4	6.0	10.5	16.4	23.5	31.9	41.7			
1	8.0	14.0	21.8	31.3	42.5	55.6	86.6		
1-1/4	10.0	17.5	27.3	39.1	53.1	69.5	108.3	156.0	
1-1/2	12.0	21.0	32.7	47.0	63.8	83.4	129.9	187.2	225.0
1-3/4	14.0	24.5	38.2	54.8	74.4	97.3	151.6	218.4	297.5
2	16.0	28.0	43.6	62.6	85.0	111.2	173.2	249.6	340.0
2-1/4	18.0	31.5	49.1	70.4	95.6	125.1	194.9	280.8	382.5
2-1/2	20.0	35.0	54.5	78.3	106.3	139.0	216.5	312.0	425.0
2-3/4	22.0	38.5	60.0	86.1	116.9	152.9	238.2	343.2	467.5
3	24.0	42.0	65.4	93.9	127.5	166.8	259.8	374.4	510.0
3-1/4	26.0	45.5	70.9	101.7	138.1	180.7	281.5	405.6	552.5
3-1/2	28.0	49.0	76.3	117.4	148.8	194.6	303.1	436.8	595.0
3-3/4	30.0	52.5	81.8	125.2	159.4	208.5	324.8	468.0	637.5
4	32.0	56.0	87.2	125.2	170.0	222.4	346.4	499.2	680.0
4-1/4	34.0	59.5	92.7	133.0	180.6	236.3	368.1	530.4	722.5
4-1/2	36.0	63.0	98.1	140.9	191.3	250.2	389.7	561.6	765.0
4-3/4	38.0	66.5	103.6	148.7	201.9	264.1	411.4	592.8	807.5
5	40.0	70.0	109.0	156.5	212.5	278.0	433.0	624.0	850.0
EACH ADD'L. IN. "F" FERRULE	8.0 2.0	14.0 2.9	21.8 4.3	31.3 5.0	42.5 5.2	55.6 7.4	86.6 15.5	124.8 30.1	170.0 49.0



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com

# STANDARD THREAD

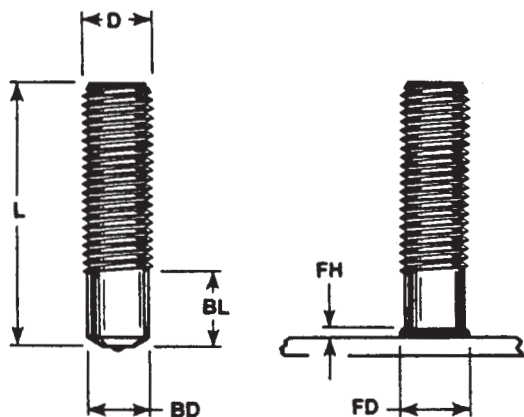

## STUD

D	MIN.		MIN.		FERRULE	
	L	BD	BL	FD	FH	CODE
1/4	3/4	.215	.375	.312	.093	P250
5/16	3/4	.275	.375	.406	.109	P312
3/8	3/4	.330	.390	.468	.109	P375
7/16	3/4	.387	.437	.531	.125	P347
1/2	7/8	.446	.500	.593	.156	P500
5/8	1	.562	.625	.750	.187	P625
3/4	1-1/4	.680	.796	.920	.250	P750
7/8	1-3/8	.798	.859	1.046	.312	P875
1"	1-1/2	.913	.921	1.187	.375	P1000


**THREADS:** Standard thread is UNC-2A (Rolled when possible), other threads are available upon request. Maximum standard thread length is 3-7/8".

MATERIAL:	LOW CARBON STEEL	STAINLESS STEEL
		C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.
MECHANICAL PROPERTIES:	Tensile 60,000 psi (min.) Yield 50,000 psi (min.) Elongation 20% (in 2 inches)	Values for various grades available upon request.
PLATING:	Plating is not standard. Copper, nickel, and zinc available upon customer request.	Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.

## FERRULE

CODE	B	D	E	M	PART NO.
P250	.380	.455	.125	.250	092 0008 06
P312	.445	.535	.125	.250	092 0008 07
P375	.505	.595	.125	.265	092 0008 08
P437	.585	.675	.156	.329	092 0008 09
P500	.650	.740	.156	.362	092 0008 10
P625	.785	.906	.156	.433	092 0008 11
P750	1.030	1.150	.187	.526	092 0008 12
P875	1.203	1.330	.187	.593	092 0008 13
P1000	1.406	1.500	.187	.593	092 0008 14



### TO ORDER OR SPECIFY, GIVE:

1. Product Code.....ARC ST
2. Diameter.....D
3. Length.....L
4. Material.....




450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com

# FULL THREAD

## STUD

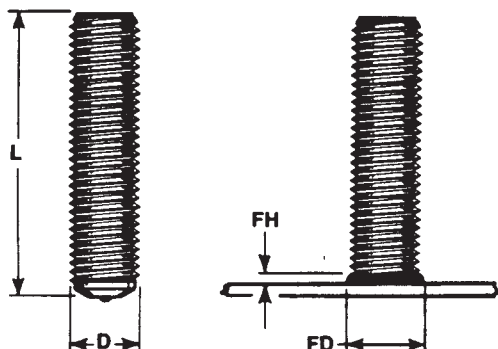

D	MIN:**		FERRULE	
	L	FD	FH	CODE
#10	3/4*	.281	.093	F187
1/4	3/4*	.359	.109	F250
5/16	3/4*	.437	.109	F312
3/8	3/4*	.500	.125	F375
7/16	7/8	.578	.140	F437
1/2	7/8	.625	.156	F500
5/8	1-1/8	.796	.187	F625
3/4	1-1/8	.937	.250	F750
7/8	1-1/2	1.093	.312	F875

\* Ferrules used with studs 3/4" long are special "short F" ferrules.  
 \*\*KNOCK-OFF studs are available if shorter lengths are required.

**THREADS:** Standard thread is UNC-2A (Rolled when possible), other threads are available upon request.  
 Maximum standard thread length is 3-7/8".

MATERIAL:	LOW CARBON STEEL	STAINLESS STEEL
	C - 0.23% max. P - 0.04% max.	AISI grade - 302/304/305 std.
	Mn - 0.90% max. S - 0.05% max.	Other grades available upon request.


MECHANICAL PROPERTIES:		
Tensile	60,000 psi (min.)	Values for various grades available upon request.
Yield	50,000 psi (min.)	
Elongation	20% (in 2 inches)	

PLATING:		
Plating is not standard. Copper, nickel, and zinc available upon customer request.		Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.

## FERRULE

CODE	B	D	E	M	PART NO.
F187	.305	.390	.156	.390	092 0005 05
F250	.380	.455	.156	.390	092 0005 06
F312	.445	.578	.156	.265	092 0005 07
F375	.505	.640	.156	.329	092 0005 08
F437	.585	.703	.188	.362	092 0005 09
F500	.650	.795	.188	.433	092 0005 10
F625	.785	1.030	.188	.526	092 0005 11
F750	1.030	1.218	.188	.593	092 0005 12
F875	1.203	1.406	.188	.732	092 0005 13



### TO ORDER OR SPECIFY, GIVE:

1. Product Code.....ARC FT
2. Diameter.....D
3. Length.....L
4. Material.....




450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com



## FULL BASE

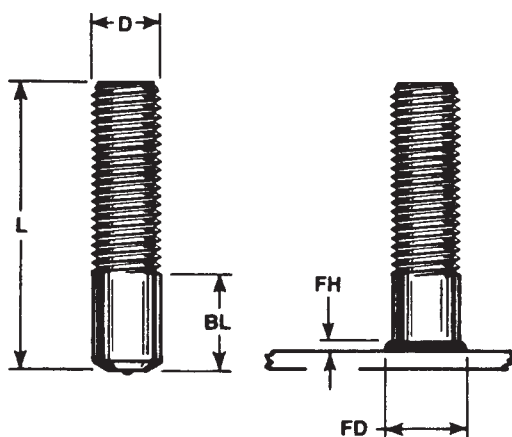

### STUD


D	MIN. L	MIN. BL	MAX. FD	MAX. FH	FERRULE CODE
1/4	3/4*	.375	.335		F250
5/16	7/8	.375	.406	.125	F312
3/8		.500	.468	.141	F375
7/16	1-1/8	.500	.546	.156	F437
1/2	1-1/4	.500	.609	.172	F500
5/8	1-1/2	.500	.765	.266	F625
3/4	1-3/4	.675	.906	.335	F750
7/8	2-1/2	.750	1.046	.390	F875
1	2-1/2	1.000	1.203	.468	F1000

**THREADS:** Standard thread is UNC-2A (Rolled when possible), other threads are available upon request. Maximum standard thread length is 3-7/8".

MATERIAL:	LOW CARBON STEEL	STAINLESS STEEL
	C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	AISI grade - 302/304/305 std. Other grades available upon request.
MECHANICAL PROPERTIES:	Tensile 60,000 psi (min.) Yield 50,000 psi (min.) Elongation 20% (in 2 inches)	Values for various grades available upon request.
PLATING:	Plating is not standard. Copper, nickel, and zinc available upon customer request.	Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.

### FERRULE



CODE	B	D	E	M	PART NO.
F250	.380	.455	.125	.390	092 0005 06
F312	.445	.578	.156	.390	092 0005 07
F375	.505	.640	.156	.390	092 0005 08
F437	.585	.703	.188	.422	092 0005 09
F500	.650	.795	.188	.438	092 0005 10
F625	.785	1.030	.188	.516	092 0005 11
F750	1.030	1.218	.188	.681	092 0005 12
F875	1.203	1.406	.194	.734	092 0005 13
F1000	1.406	1.609	.1250	.843	092 0005 14


### TO ORDER OR SPECIFY, GIVE:

1. Product Code.....ARC FB
2. Diameter.....D
3. Length.....L
4. Material.....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com

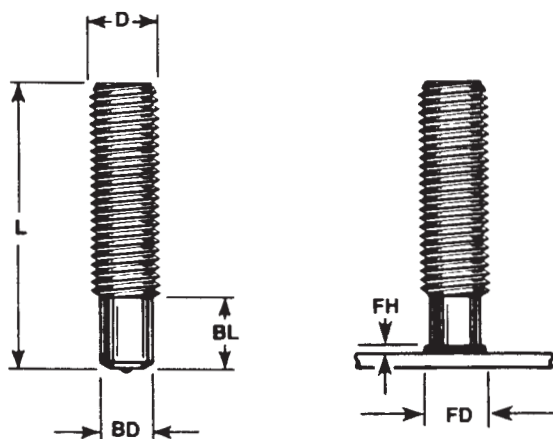

## LONG REDUCED BASE

### STUD


D	MIN.		MIN.		FERRULE	
	L	BD	BL	FD	FH	CODE
1/4	3/4	.187	.375	.281	.109	FS187
5/16	3/4	.250	.375	.359	.125	FS250
3/8	3/4	.312	.375	.437	.125	FS312
7/16	1	.375	.375	.500	.140	FS375
1/2	1	.437	.437	.578	.140	FS437
5/8	1-1/4	.500	.500	.656	.156	FS500
3/4	1-1/2	.625	.718			FS625

**THREADS:** Standard thread is UNC-2A (Rolled when possible), other threads are available upon request. Maximum standard thread length is 3-7/8".

MATERIAL:	LOW CARBON STEEL	STAINLESS STEEL
	C - 0.23% max. P - 0.04% max.	AISI grade - 302/304/305 std.
	Mn - 0.90% max. S - 0.05% max.	Other grades available upon request.
MECHANICAL PROPERTIES:	Tensile 60,000 psi (min.) Yield 50,000 psi (min.) Elongation 20% (in 2 inches)	Values for various grades available upon request.
PLATING:	Plating is not standard. Copper, nickel, and zinc available upon customer request.	Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.

### FERRULE



CODE	B	D	E	M	PART NO.
FS187	.305	.390	.125	.250	092 0004 05
FS250	.380	.455	.125	.250	092 0004 06
FS312	.505	.595	.125	.250	092 0004 07
FS375	.585	.675	.125	.250	092 0004 08
FS437	.650	.740	.156	.281	092 0004 09
FS500	.785	.875	.156	.281	092 0004 10
FS625	.921	1.030	.187	.375	092 0004 11

### TO ORDER OR SPECIFY, GIVE:


- Product Code.....ARC LRB
- Diameter.....D
- Length.....L
- Material.....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com

## SHORT REDUCED BASE

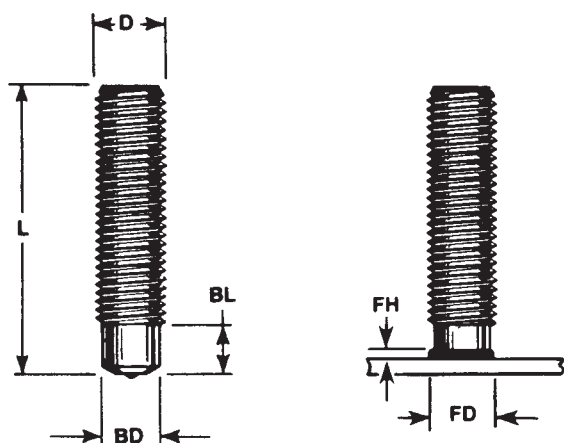

STUD							FERRULE CODE
D	MIN. L	MIN. BD	MIN. BL	FD	FH		
1/4	7/8	.187	.156	.281	.109	TB250	
5/16	7/8	.275	.250	.390	.109	RB312	
3/8	7/8	.312	.250	.437	.125	RB375	
1/2	1	.435	.250	.593	.156	RB500	
5/8	1-1/8	.500	.312	.687	.156	TB625	
3/4	1-1/8	.625	.375	.812	.187	TB750	


**THREADS:** Standard thread is UNC-2A (Rolled when possible), other threads are available upon request. Maximum standard thread length is 3-7/8".

MATERIAL:	LOW CARBON STEEL	STAINLESS STEEL
	C - 0.23% max. P - 0.04% max.	AISI grade - 302/304/305 std.
	Mn - 0.90% max. S - 0.05% max.	Other grades available upon request.

MECHANICAL PROPERTIES:		
Tensile	60,000 psi (min.)	Values for various grades available upon request.
Yield	50,000 psi (min.)	
Elongation	20% (in 2 inches)	

PLATING:		
Plating is not standard. Copper, nickel, and zinc available upon customer request.		Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.



FERRULE					
CODE	B	D	E	M	PART NO.
TB250	.380	.455	.156	.375	092 0012 06
RB312	.445	.546	.156	.437	092 0012 07
RB375	.505	.640	.156	.437	092 0012 08
RB500	.650	.796	.187	.468	092 0012 10
TB625	.785	1.030	.187	.578	092 0012 11
TB750	.921	1.140	.203	.593	092 0012 12

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....ARC SRB
2. Diameter.....D
3. Length.....L
4. Material.....




450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com

# NO THREAD

## STUD

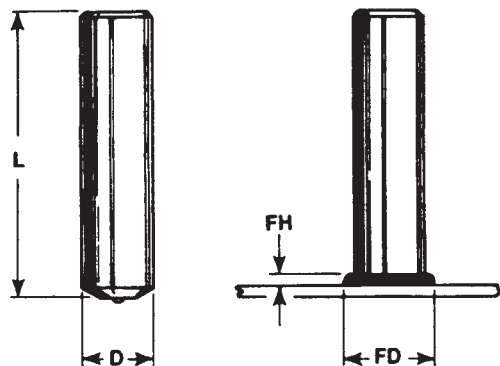

D	MIN**		FERRULE	
	L	FD	FH	CODE
3/16	3/4*	.281	.093	F187
1/4	3/4*	.359	.109	F250
5/16	3/4*	.437	.109	F312
3/8	3/4*	.500	.125	F375
7/16	3/4*	.578	.140	F437
1/2	7/8	.627	.156	F500
5/8	1"	.796	.187	F625
3/4	1-1/8	.937	.250	F750
7/8	1-1/4	1.093	.312	F875
1"	1-1/2	1.312	.375	F1000

\* Ferrules used with studs 3/4" long are special "short F" ferrules.


\*\* KNOCK-OFF studs are available if shorter lengths are required.

<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b>	<b>STAINLESS STEEL</b>
	C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b>	Tensile 60,000 psi (min.)	Values for various grades available upon request.
	Yield 50,000 psi (min.)	
Elongation 20% (in 2 inches)		
<b>PLATING:</b>	Plating is not standard. Copper, nickel, and zinc available upon customer request.	Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.

## FERRULE

CODE	B	D	E	M	PART NO.
F187	.305	.390	.156	.390	092 0005 05
F250	.380	.455	.156	.390	092 0005 06
F312	.445	.578	.156	.265	092 0005 07
F375	.505	.640	.156	.329	092 0005 08
F437	.585	.703	.188	.362	092 0005 09
F500	.650	.795	.188	.433	092 0005 10
F625	.785	1.030	.188	.526	092 0005 11
F750	1.030	1.218	.188	.593	092 0005 12
F875	1.203	1.406	.188	.732	092 0005 13
F1000	1.406	1.609	.188	.820	092 0005 14



### TO ORDER OR SPECIFY, GIVE:

1. Product Code..... ARC NT
2. Diameter..... D
3. Length..... L
4. Material.....





450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com




## BENT - NO THREAD

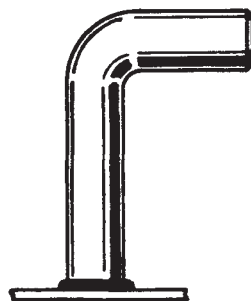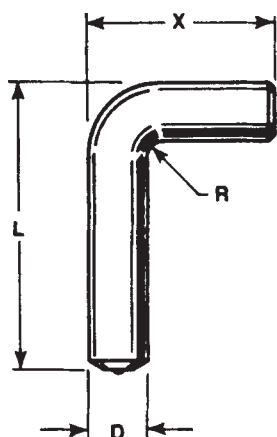

STUD				
D	MIN. L	MIN. X	MIN. R	FERRULE CODE
1/4	1-1/8	1-1/4	.125	F250
5/16	1-1/4	1-1/2	.218	F312
3/8	1-1/2	1-1/2	.218	F375
7/16	1-5/8	1-5/8	.250	F437
1/2	1-3/4	1-3/4	.250	F500
5/8	1-7/8	2"	.312	F625
3/4	2-3/4	3"	.500	F750
7/8	3-1/2	3-3/8	.500	F875

<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b>	<b>STAINLESS STEEL</b>
	C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b>	Tensile 60,000 psi (min.)	Values for various grades available upon request.
	Yield 50,000 psi (min.)	
Elongation 20% (in 2 inches)		
<b>PLATING:</b>	Plating is not standard. Copper, nickel, and zinc available upon customer request.	Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.



FERRULE					
CODE	B	D	E	M	PART NO.
F250	.380	.455	.156	.390	092 0005 06
F312	.445	.578	.156	.390	092 0005 07
F375	.505	.640	.156	.390	092 0005 08
F437	.585	.703	.188	.422	092 0005 09
F500	.650	.795	.188	.438	092 0005 10
F625	.785	1.030	.188	.516	092 0005 11
F750	1.030	1.218	.188	.656	092 0005 12
F875	1.203	1.406	.188	.732	092 0005 13

**TO ORDER OR SPECIFY, GIVE:**


1. Product Code..... ARC B-NT
2. Diameter..... D
3. Length ..... L
4. Length ..... X
5. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com

## TAPPED - FULL BASE

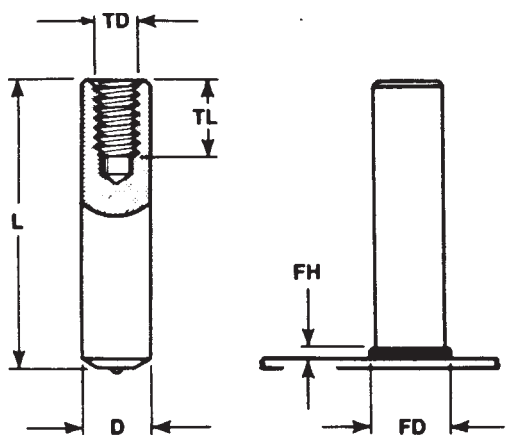

### STUD

D	MIN. L	TD	TL*	MAX. FD	MAX. FH	FERRULE CODE
1/4	9/16	8-32	1/4	.359	.109	F250
5/16	21/32	10-24	9/32	.437	.109	F312
3/8	13/16	1/4-20	3/8	.500	.125	F375
7/16	29/32	5/16-18	15/32	.578	.140	F437
1/2	1-1/32	3/8-16	9/16	.625	.156	F500
5/8	1-9/32	3/8-16	9/16	.625	.156	F500
3/4	1-3/8	1/2-13	3/4	.937	.250	F750
7/8	1-5/8	5/8-11	15/16	1.093	.312	F875

\* Maximum standard tap depth equals 1-1/2 times tap diameter.

**TAPS:** Standard tap is UNC-2B, other taps are available.


MATERIAL:	LOW CARBON STEEL	STAINLESS STEEL
	C - 0.23% max. P - 0.04% max.	AISI grade - 302/304/305 std.
	Mn - 0.90% max. S - 0.05% max.	Other grades available upon request.

MECHANICAL PROPERTIES:		
Tensile	60,000 psi (min.)	Values for various grades available upon request.
Yield	50,000 psi (min.)	
Elongation	20% (in 2 inches)	

PLATING:		
Plating is not standard. Copper nickel, and zinc available upon customer request.		Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.

### FERRULE



CODE	B	D	E	M	PART NO.
F250	.380	.455	.156	.390	092 0005 06
F312	.445	.578	.156	.390	092 0005 07
F375	.505	.640	.156	.390	092 0005 08
F437	.585	.703	.188	.422	092 0005 09
F500	.650	.795	.188	.438	092 0005 10
F625	.785	1.030	.188	.516	092 0005 11
F750	1.030	1.218	.188	.656	092 0005 12
F875	1.203	1.406	.188	.732	092 0005 13

### TO ORDER OR SPECIFY, GIVE:


1. Product Code..... ARC TAPFB
2. Diameter..... D
3. Length ..... L
4. Tap Diameter..... TD
5. Tap Length ..... TL
6. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com

## TAPPED - REDUCED BASE

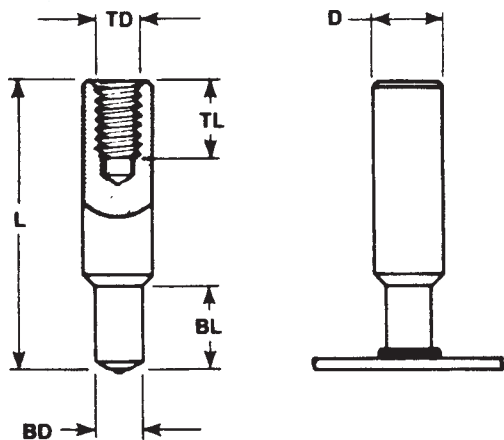

STUD						
D	MIN. L	TD	TL*	BD	BL	FERRULE CODE
3/8	1-1/2	1/4-20	3/8	.250	7/16	FS250
1/2	1-1/2	3/8-16	9/16	.375	7/16	FS375
5/8	1-1/2	7/16-14	21/32	.500	1/2	FS500
3/4	1-1/2	7/16-14	21/32	.500	1/2	FS500
7/8	2	5/8-11	15/16	.625	5/8	FS625
1"	2-1/2	3/4-10	1"	.750	5/8	FS750

\* Maximum standard tap depth equals 1-1/2 times tap diameter.

**TAPS:** Standard tap is UNC-2B, other taps are available.


MATERIAL:	LOW CARBON STEEL	STAINLESS STEEL
	C - 0.23% max. P - 0.04% max.	AISI grade - 302/304/305 std.
	Mn - 0.90% max. S - 0.05% max.	Other grades available upon request.

MECHANICAL PROPERTIES:		
Tensile	60,000 psi (min.)	Values for various grades available upon request.
Yield	50,000 psi (min.)	
Elongation	20% (in 2 inches)	

PLATING:		
Plating is not standard. Copper, nickel, and zinc available upon customer request.		Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.

### FERRULE



CODE	B	D	E	M	PART NO.
FS250	.380	.455	.125	.250	092 0005 06
FS375	.585	.675	.125	.250	092 0005 08
FS500	.785	.875	.156	.281	092 0005 10
FS625	.921	1.030	.187	.375	092 0005 11
FS750	1.043	1.203	.187	.375	092 0005 12

### TO ORDER OR SPECIFY, GIVE:


- Product Code.....ARC TAPRB
- Base Diameter.....BD
- Base Length.....BL
- Thread Diameter.....TD
- Thread Length.....TL
- Material.....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com

# SHOULDER - THREADED

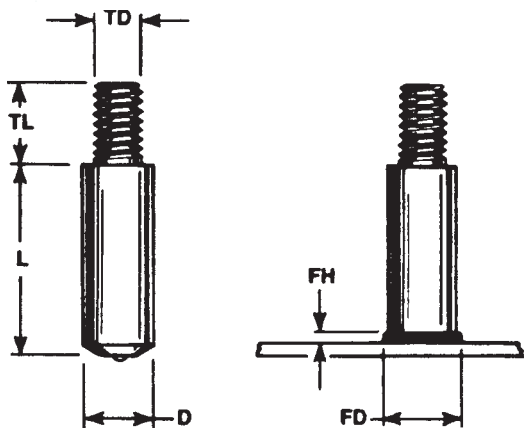

STUD						
D	MIN. L	MIN. TD	MAX. TL	MAX. FD	MAX. FH	FERRULE CODE
1/4	.312	#8	.437	.359	.109	F250
5/16	.375	#10	.500	.437	.109	F312
3/8	.375	1/4	.750	.500	.125	F375
7/16	.437	5/16	.875	.578	.140	F437
1/2	.500	3/8	1.000	.627	.156	F500
5/8	.625	1/2	1.250	.796	.187	F625
3/4	.625	5/8	1.625	.937	.250	F750
7/8	.750	3/4	1.875	1.093	.312	F875


**THREADS:** Standard thread is UNC-2A (Rolled when possible), other threads available upon request.

MATERIAL:	LOW CARBON STEEL	STAINLESS STEEL
	C - 0.23% max. P - 0.04% max.	AISI grade - 302/304/305 std.
	Mn - 0.90% max. S - 0.05% max.	Other grades available upon request.

MECHANICAL PROPERTIES:		
Tensile	60,000 psi (min.)	Values for various grades available upon request.
Yield	50,000 psi (min.)	
Elongation	20% (in 2 inches)	

PLATING:		
Plating is not standard. Copper, nickel, and zinc available upon customer request.		Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.



FERRULE					
CODE	B	D	E	M	PART NO.
F250	.380	.455	.156	.390	092 0005 06
F312	.445	.578	.156	.390	092 0005 07
F375	.505	.640	.156	.390	092 0005 08
F437	.585	.703	.188	.422	092 0005 09
F500	.650	.795	.188	.438	092 0005 10
F625	.785	1.030	.188	.516	092 0005 11
F750	1.030	1.218	.188	.656	092 0005 12
F875	1.203	1.406	.188	.732	092 0005 13


**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....ARC SH-T
2. Diameter.....D
3. Length.....L
4. Thread Diameter.....TD
5. Thread Length.....TL
6. Material.....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com

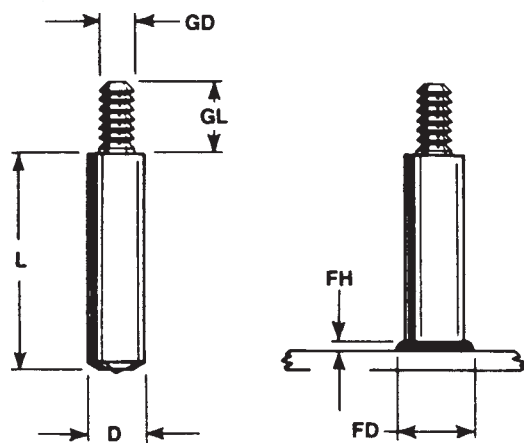


## SHOULDER - ANNULAR GROVE

### STUD

D	L	GD	GL	FD	FH	FERRULE
						CODE
5/16	1"	.187	.375	.437	.109	F312
5/16	1"	.187	.437	.437	.109	F312

<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b>	<b>STAINLESS STEEL</b>
	C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b>	Tensile	60,000 psi (min.)
	Yield	50,000 psi (min.)
	Elongation	20% (in 2 inches)
<b>PLATING:</b>	Plating is not standard. Copper, nickel, and zinc available upon customer request.	Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.




### FERRULE

CODE	B	D	E	M	PART NO.
F312	.445	.578	.156	.390	092 0005 07

### TO ORDER OR SPECIFY, GIVE:

1. Product Code..... ARC SH-AG
2. Diameter..... D
3. Length..... L
4. Groove Diameter..... GD
5. Groove Length..... GL
6. Material.....




## WAG AL "Setting Cap" (Aluminum)

<b>CAP:</b>	Sold separately. Not a component part of stud.
<b>CAP-SETTING TOOL:</b>	For installing WAG AL, available from stock. PART NO. - 102-0100-08.



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com

## SHOULDER - NO THREAD

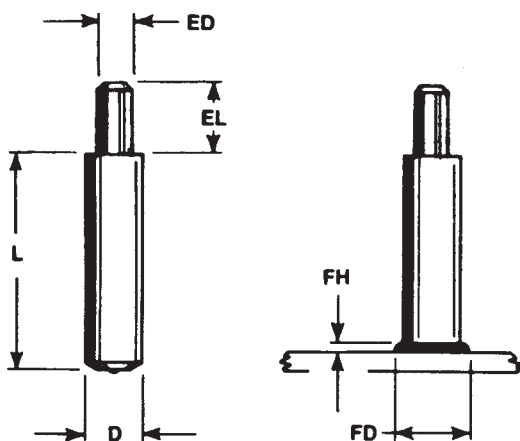

### STUD

MIN.						FERRULE
D	L	ED	EL	FD	FH	CODE
5/16	3/8	3/16	3/16	.437	.109	F312
3/8	3/8	3/16	3/16	.500	.125	F375
1/2	1/2	3/8	45/64	.627	.156	F500

**MATERIAL:**

**LOW CARBON STEEL**

C - 0.23% max. P - 0.04% max.  
Mn - 0.90% max. S - 0.05% max.

**STAINLESS STEEL**

AISI grade - 302/304/305 std.  
Other grades available upon request.

**MECHANICAL PROPERTIES:**

Tensile 60,000 psi (min.)  
Yield 50,000 psi (min.)  
Elongation 20% (in 2 inches)

Values for various grades available upon request.


**PLATING:**

Plating is not standard.  
Copper, nickel, and zinc available upon customer request.

Does not apply to Stainless.

**FERRULES:**

Ferrules are component parts of studs. Not sold separately.



### FERRULE

CODE	B	D	E	M	PART NO.
F312	.445	.578	.156	.390	092 0005 07
F375	.505	.640	.156	.390	092 0005 08
F500	.560	.795	.188	.438	092 0005 10

**TO ORDER OR SPECIFY, GIVE:**


1. Product Code.....ARC SH-NT
2. Diameter.....D
3. Length.....L
4. Groove Diameter.....ED
5. Groove Length.....EL
6. Material.....



450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

www.midwestfasteners.com

# COLLAR

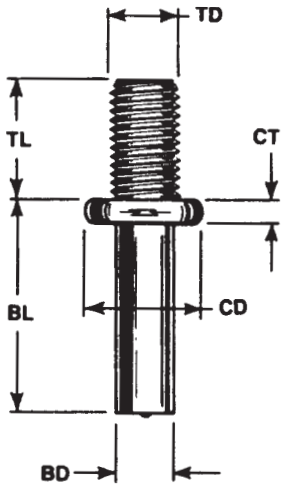

STUD						
	MIN		MIN			FERRULE
TD	TL	BD	BL	CD	CT	CODE
1/4	.375	.215	.500	.500	.093	C250
5/16	.375	.275	.500	.562	.093	C312
3/8	.500	.330	.500	.625	.109	C375
1/2	.625	.448	.593	.750	.140	C500


**THREADS:** Standard thread is UNC-2A (Rolled when possible), other threads are available upon request. Maximum standard thread length is 3-7/8".

<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b>	<b>STAINLESS STEEL</b>
	C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	AISI grade - 302/304/305 std. Other grades available upon request.

<b>MECHANICAL PROPERTIES:</b>	Tensile	60,000 psi (min.)	Values for various grades available upon request.
	Yield	50,000 psi (min.)	
Elongation	20% (in 2 inches)		

<b>PLATING:</b>	Plating is not standard. Copper, nickel, and zinc available upon customer request.	Does not apply to Stainless.
-----------------	------------------------------------------------------------------------------------	------------------------------

**FERRULES:** Ferrules are component parts of studs. Not sold separately.



FERRULE					
CODE	B	D	E	M	PART NO.
C250	.785	.875	.125	.250	092 0014 06
C312	.785	.875	.125	.250	092 0014 07
C375	.785	.875	.125	.250	092 0014 08
C500	1.030	1.203	.125	.281	092 0014 10

**TO ORDER OR SPECIFY, GIVE:**


- 1. Product Code.....ARC COL
- 2. Base Diameter.....BD
- 3. Base Length.....BL
- 4. Thread Diameter.....TD
- 5. Thread Length.....TL
- 6. Material.....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174



# BENT-COLLAR

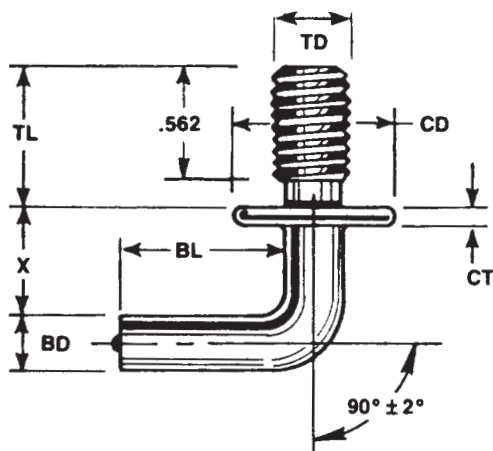

STUD						
	STD.	MIN				
TD	TL	BL	BD	CD	CT	X
3/8-16	1.375	.625	.331	5/8	.109	5/8


**THREADS:** Standard thread is UNC-2A (Rolled when possible), other threads are available upon request. Maximum standard thread length is 3-7/8".

<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b>	<b>STAINLESS STEEL</b>
	C - 0.23% max. P - 0.04% max.	AISI grade - 302/304/305 std.
	Mn - 0.90% max. S - 0.05% max.	Other grades available upon request.

<b>MECHANICAL PROPERTIES:</b>		
Tensile	60,000 psi (min.)	Values for various grades available upon request.
Yield	50,000 psi (min.)	
Elongation	20% (in 2 inches)	

<b>PLATING:</b>		
Plating is not standard. Copper, nickel, and zinc available upon customer request.		Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.



FERRULE					
CODE	B	D	E	M	PART NO.
C375	.785	.875	.125	.250	092 0014 08

**TO ORDER OR SPECIFY, GIVE:**

- 1. Product Code.....ARC B-COL
- 2. Base Diameter.....BD
- 3. Base Length.....BL
- 4. Thread Diameter.....TD
- 5. Thread Length.....TL
- 6. Material.....





450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

www.midwestfasteners.com



# ANNULAR RING (NAVY)

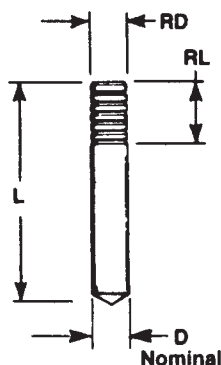


STUD				
NOM. D	MIN. L	RD	RL	FERRULE CODE
3/16	3/4"*	.175	.312	F187

\* Ferrules used with Studs 3/4" long are special "short F" ferrules.

<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b> C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max. Conforms to: MIL-S-24149 Type: I Class: III	<b>STAINLESS STEEL</b> AISI grade - 302/304/305 std. Other grades available upon request.
	<b>MECHANICAL PROPERTIES:</b> Tensile 60,000 psi (min.) Yield 50,000 psi (min.) Elongation 20% (in 2 inches)	Values for various grades available upon request.
<b>PLATING:</b>	Plating is not standard. Copper, nickel, and zinc available upon customer request.	Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.




FERRULE					
CODE	B	D	E	M	PART NO.
F187	.305	.380	.156	.390	092-0005-05

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code..... ARC AR
2. Diameter..... D
3. Length..... L
4. Material.....

PART NO. MCAL-625-875

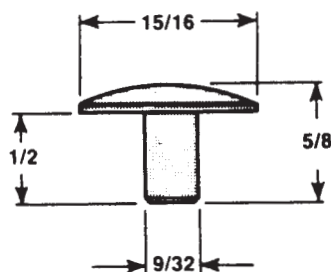


**“MUSHROOM NAVY CAP” (Aluminum)**

**CAP:** Sold separately. Not a component part of stud.



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com

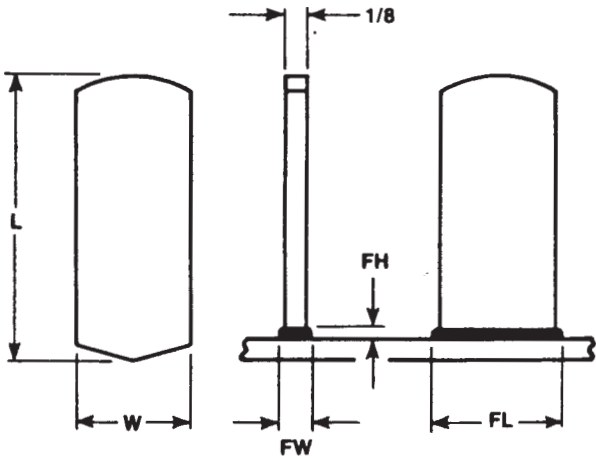


**RECTANGULAR-PLAIN**

STUD					
W	MIN. L	FW	FL	FH	FERRULE CODE
3/8	7/8	.218	.437	.125	R375
5/8	1"	.218	.687	.156	R625

<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b>	<b>STAINLESS STEEL</b>
	C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b>	Tensile 60,000 psi (min.)	Values for various grades available upon request.
	Yield 50,000 psi (min.)	
Elongation 20% (in 2 inches)		
<b>PLATING:</b>	Plating is not standard. Copper, nickel, and zinc available upon customer request.	Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.



FERRULE					
CODE	B	D	E	M	PART NO.
R375	.505	.625	.156	.390	092 0020 08
R625	.921	.500	.188	.438	092 0020 11


**TO ORDER OR SPECIFY, GIVE:**

- 1. Product Code.....ARC R-PL
- 2. Size.....1/8 x W
- 3. Length ..... L
- 4. Material .....



450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174

# RECTANGULAR- 'T' SLOTTED

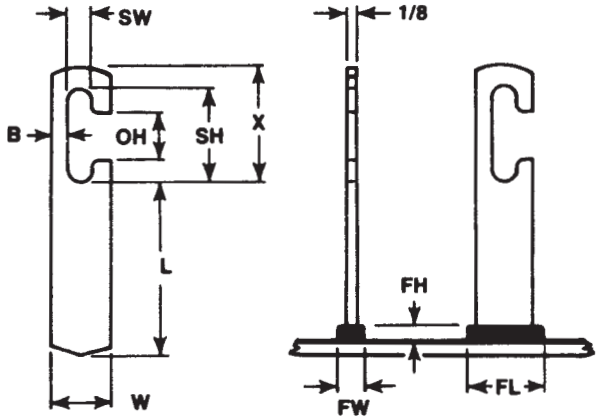


STUD					
MIN.					
W	L	OH	SH	X	SW
3/8	1/2	.322	.531	.765	.130
5/8	1/2	.500	1.000	1.250	.255

STUD (CONTINUED)				
B	FW	FL	FH	FERRULE CODE
.122	.218	.437	.125	R375
.185	.218	.687	.156	R625

<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b>	<b>STAINLESS STEEL</b>
	C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b>	Tensile 60,000 psi (min.)	Values for various grades available upon request.
	Yield 50,000 psi (min.)	
	Elongation 20% (in 2 inches)	
<b>PLATING:</b>	Plating is not standard. Copper, nickel, and zinc available upon customer request.	Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.




FERRULE					
CODE	B	D	E	M	PART NO.
R375	.505	.625	.156	.390	092 0020 08
R625	.921	1.093	.188	.438	092 0020 11

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....ARC R-TS
2. Size.....1/8 x W
3. Length.....L
4. Material.....

**MIDWEST FASTENERS, INC.**  
 450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com


# RECTANGULAR-WITH HOLE

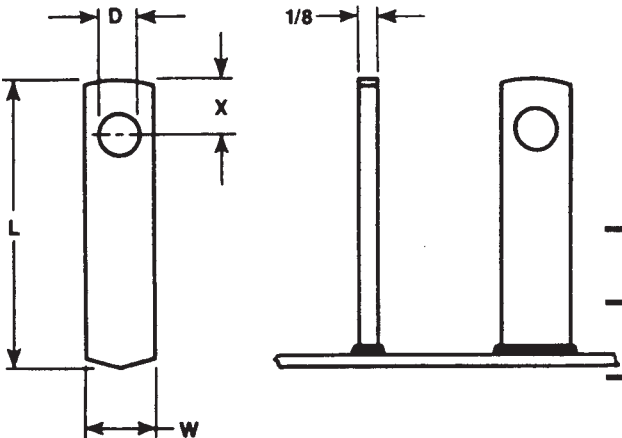

STUD				
W	MIN. L	D	X	FERRULE CODE
3/8	7/8	.203	5/16	R375
5/8	1"	.312	5/16	R625

<b>MATERIAL:</b>	<b>LOW CARBON STEEL</b>	<b>STAINLESS STEEL</b>
	C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	AISI grade - 302/304/305 std. Other grades available upon request.
<b>MECHANICAL PROPERTIES:</b>	Tensile 60,000 psi (min.)	Values for various grades available upon request.
	Yield 50,000 psi (min.)	
Elongation 20% (in 2 inches)		
<b>PLATING:</b>	Plating is not standard. Copper, nickel, and zinc available upon customer request.	Does not apply to Stainless.

**FERRULES:** Ferrules are component parts of studs. Not sold separately.




FERRULE					
CODE	B	D	E	M	PART NO.
R375	.505	.625	.156	.390	092 0020 08
R625	.921	.500	.188	.438	092 0020 11

**TO ORDER OR SPECIFY, GIVE:**

- 1. Product Code.....ARC R-WH
- 2. Size..... 1/8 x W
- 3. Length ..... L
- 4. Material .....

**MIDWEST FASTENERS, INC.**  
 450 Richard St.  
 Miamisburg, OH 45342  
 Toll Free: 800-852-8352  
 Fax: 937-866-4174  
 www.midwestfasteners.com

**KNURLED**

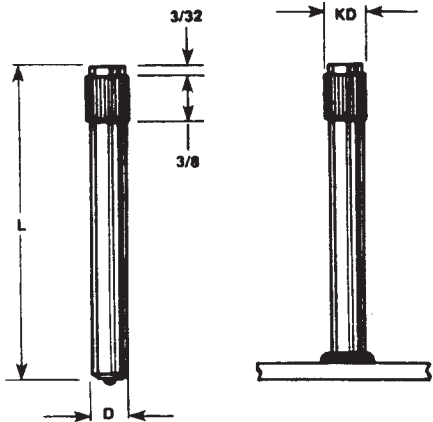

STUD			
D	MIN. L	KD	FERRULE CODE
5/16	1"	.327	F312


**MATERIAL: LOW CARBON STEEL**

C - 0.23% max. P - 0.04% max.  
Mn - 0.90% max. S - 0.05% max.

**MECHANICAL PROPERTIES:**

Tensile 60,000 psi (min.)  
Elongation 20% (in 2 inches)

**FERRULES:** Ferrules are component parts of studs. Not sold separately.




FERRULE					
CODE	B	D	E	M	PART NO.
F312	.445	.578	.156	.390	092 0005 07

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code ..... ARC KNRL
2. Diameter ..... D
3. Length ..... L
4. Material .....

Part No. DPLM-200-312

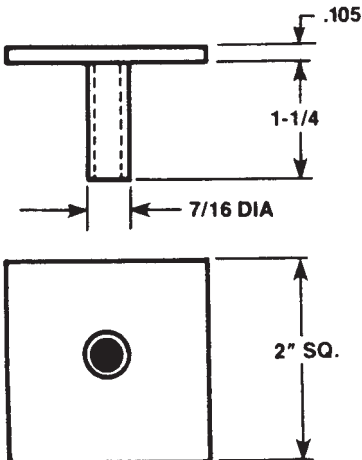


**DRIVE PLATE (DPLM) 2" SQUARE**

**DRIVE PLATE:** Sold separately. Not a component part of stud.



450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174  
www.midwestfasteners.com

# HEADED CONCRETE ANCHOR

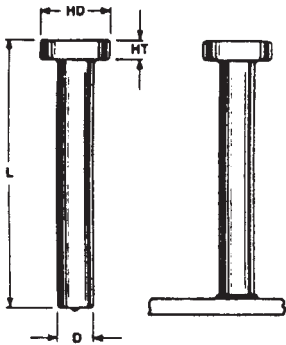

D	STUD			FERRULE CODE*
	MIN L	HD	HT	
1/4	3/4	1/2	3/16	F250
3/8	3/4	3/4	9/32	F375
1/2	1"	1"	5/16	F500
5/8	1"	1-1/4	5/16	F625

**MATERIAL:** LOW CARBON STEEL  
AISI C1010 through C1020

**MECHANICAL PROPERTIES:**

Tensile 55,000 psi (min.)  
Elongation 20% (in 2 inches)


**OTHER MATERIALS:** Also available in stainless steel.

**SPECS:** ALL MIDWEST FASTENERS ARC HCA studs meet AWS specifications.  
Test reports available upon request.


**FERRULES:** Ferrules are component parts of studs. Not sold separately.  
Ferrule exterior dimensions are available upon request.

**\*HEADED CONCRETE ANCHORS** are available for welding to flat surface, inside angles, and outside angles. Each of these applications requires the proper style stud and ferrule, so please specify your application when ordering studs.


**FLAT SURFACE (F)**



**INSIDE ANGLE (IA)**



**OUTSIDE ANGLE (OA)**

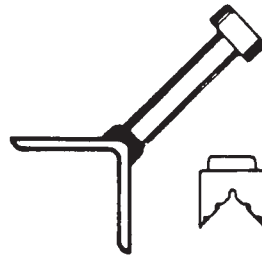

**TO ORDER OR SPECIFY, GIVE:**


1. Product Code..... ARC HCA
2. Diameter.....D
3. Length ..... L
4. Material .....
5. Welding Application .....



450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

www.midwestfasteners.com

# SHEAR CONNECTOR

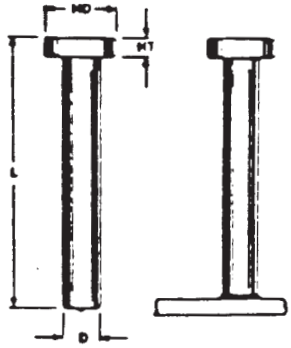

D	STUD			FERRULE CODE*
	MIN. L	HD	HT	
3/4	1-1/2	1-1/4	3/8	F750
7/8	2	1-3/8	3/8	F875

**MATERIAL:** LOW CARBON STEEL  
AISI C1015, C1018, or C1020

**MECHANICAL PROPERTIES:**


Tensile	60,000 psi (min.)
Yield	50,000 psi (min.)
Elongation	20% (min.)
Reduction of Area	50% (min.)

**SPECS:** ALL MIDWEST FASTENERS ARC SC studs meet AWS, AASHTO, and ICBO specifications. Test reports available upon request.

**FERRULES:** Ferrules are component parts of studs. Not sold separately. Ferrule exterior dimensions are available upon request.

**\*SHEAR CONNECTORS:** Available for welding to flat surface, inside angles, outside angles, and “thru deck.” Each of these applications requires the proper style stud and ferrule, so please specify your application when ordering studs.

**FLAT SURFACE (F)**




**INSIDE ANGLE (IA)**



**OUTSIDE ANGLE (OA)**



**WELD THRU DECK (WTD)**

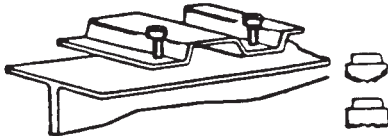

**TO ORDER OR SPECIFY, GIVE:**

1. Product Code.....ARC SC
2. Diameter.....D
3. Length .....L
4. Material .....
5. Welding Application .....



450 Richard St.  
Miamisburg, OH 45342  
Toll Free: 800-852-8352  
Fax: 937-866-4174

www.midwestfasteners.com