

PINK® INSULATION - PINK® 044 R and PINK® 044 B


TECHNICAL DATA SHEET

DESCRIPTION

PINK® insulation rolls and batts are flexible, FIBERGLAS insulation.

BASE MATERIAL

Products covered by this data sheet are manufactured from glass fibers made from both recycled and virgin materials. The fibers are coated to bind the product together and to provide maximum dust suppression. Level of thermal performance is achieved by varying the density and thickness of the base product.

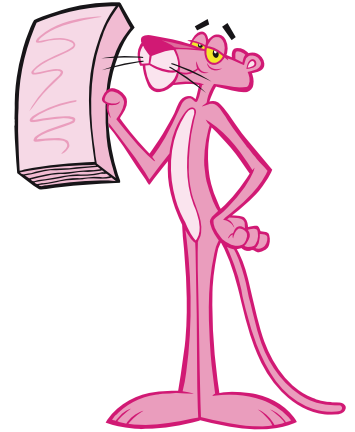

FEATURES AND BENEFITS

- Excellent thermal control.
- Long term performance, PINK® insulation is dimensionally stable and will not slump within the cavity wall. Due to its inorganic nature, it will not rot or mildew and is non-corrosive to steel, copper and aluminum.
- Easy to handle and install, PINK® insulation can be friction-fit. Trimming can be done with a utility knife.
- SpaceSaver Packaging. PINK® insulation batts and rolls are compression packaged in SpaceSaver packaging, which reduces freight and speeds job site handling/installation.

USES

PINK® insulation in roll and batt form can be used in a wide range of exterior wall and roof/ceiling applications. The product can be installed in wood or metal framing cavities.

PRODUCT FORMAT AND PACKAGING

Product is available without foil and other faced materials. Commonly available sizes in roll and batt form are shown below.

TECHNICAL SPECIFICATIONS AND COMPLIANCES

- MW - EN 13162 - T1
- EC Certificate Of Conformity
- Reaction to Fire: A1 (EN 13501)
- Thermal Conductivity λ_D : 0.044 W/(m·K) (EN 12667)




MATERIAL DATA SAFETY SHEET INFORMATION

15-MSD-13614-S – EU

Phone: +32 26748211

Fax +32 26748248

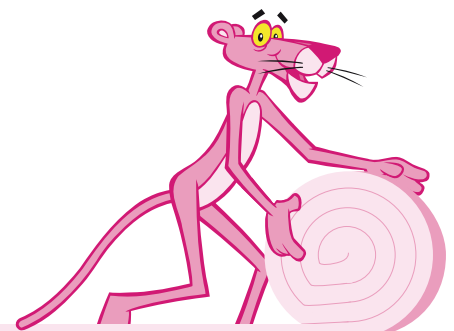



INNOVATIONS FOR LIVING®

PINK® INSULATION - PINK® 044 R and PINK® 044 B

TECHNICAL DATA SHEET

PRODUCT CHARACTERISTICS

Description	R_p (m ² .K/W)	Thickness (mm)	Width (mm)	Length (mm)	m ² /roll	m ³ /roll	Rolls/ Multipack
PINK® 044 R	1,10	50	1200	21000	25,20	1,26	4
PINK® 044 R	1,35	60	1200	16500	19,80	1,19	4
PINK® 044 R	1,80	80	1200	12500	15,00	1,20	4
PINK® 044 R	2,25	100	1200	10000	12,60	1,26	4
PINK® 044 R	2,25	100	2 x 600	10000	12,00	1,20	4
PINK® 044 R	2,25	100	3 x 400	10000	12,00	1,20	4
PINK® 044 R	2,70	120	1200	8000	9,60	1,15	4
PINK® 044 R	3,15	140	1200	7000	8,40	1,18	4
PINK® 044 R	3,40	150	1200	6500	7,80	1,17	4
PINK® 044 R	3,40	150	2 x 600	6500	7,80	1,17	4
PINK® 044 R	3,40	150	3 x 400	6500	7,80	1,17	4
PINK® 044 R	3,60	160	1200	6000	7,20	1,15	4
PINK® 044 R	4,05	180	1200	5500	6,60	1,19	4
PINK® 044 R	4,55	200	1200	5000	6,00	1,20	4
PINK® 044 R	4,55	200	2 x 600	5000	6,00	1,20	4
PINK® 044 R	4,55	200	3 x 400	5000	6,00	1,20	4

Description	R_p (m ² .K/W)	Thickness (mm)	Width (mm)	Length (mm)	m ² /Batt	m ³ /Batt	Batts/ Package	Batts/ Multipack
PINK® 044 B	1,10	50	600	1200	0,72	0,04	36	5
PINK® 044 B	1,10	50	625	1200	0,75	0,04	36	5
PINK® 044 B	1,35	60	600	1200	0,72	0,04	30	5
PINK® 044 B	1,35	60	625	1200	0,75	0,05	30	5
PINK® 044 B	1,80	80	600	1200	0,72	0,06	22	5
PINK® 044 B	1,80	80	625	1200	0,75	0,06	22	5
PINK® 044 B	2,25	100	600	1200	0,72	0,07	18	5
PINK® 044 B	2,25	100	625	1200	0,75	0,08	18	5
PINK® 044 B	2,70	120	600	1200	0,72	0,09	15	5
PINK® 044 B	2,70	120	625	1200	0,75	0,09	15	5
PINK® 044 B	3,15	140	600	1200	0,72	0,10	12	5
PINK® 044 B	3,15	140	625	1200	0,75	0,11	12	5
PINK® 044 B	3,40	150	600	1200	0,72	0,11	11	5
PINK® 044 B	3,40	150	625	1200	0,75	0,11	11	5
PINK® 044 B	3,60	160	600	1200	0,72	0,12	10	5
PINK® 044 B	3,60	160	625	1200	0,75	0,12	10	5
PINK® 044 B	4,05	180	600	1200	0,72	0,13	9	5
PINK® 044 B	4,05	180	625	1200	0,75	0,14	9	5
PINK® 044 B	4,55	200	600	1200	0,72	0,14	9	5
PINK® 044 B	4,55	200	625	1200	0,75	0,15	9	5



INNOVATIONS FOR LIVING®

EUROPEAN OWENS CORNING FIBERGLAS SPRL
 CHAUSSEE DE LA HULPE, 166
 B - 1170 BRUSSELS, BELGIUM
www.owenscorning.eu

THE PINK PANTHER™ & ©1964–2008 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK and the word PINK are registered trademarks of Owens Corning. ©2008 Owens Corning.

