



INTERNATIONAL FIREPROOF TECHNOLOGY, INC

ADDITIONAL LISTEE: INTERNATIONAL CARBIDE TECHNOLOGY CO., LTD

DC315 FIELD APPLIED INTUMESCENT COATINGS

CSI Section:

09 96 43 Fire-Retardant Coatings

1.0 RECOGNITION

DC315 has been evaluated for use as a fire-protective coating for foam plastic products. The coating has been evaluated for the contribution of wall and ceiling finish materials to room fire growth and as an alternate to the prescriptive thermal barrier required in Section 2603.4 of the IBC and Section 316.4 of the IRC. The coating has also been evaluated as an alternate to the prescriptive ignition barriers required in Section 2603.4.1.6 of the IBC and Sections R316.5.3 and R316.5.4 of the IRC. DC315 evaluated in this report is a satisfactory alternative to the following codes and regulations:

- 2015 and 2012 International Building Code® (IBC)
- 2015 and 2012 International Residential Code® (IRC)
- AC456
- AC377

2.0 LIMITATIONS

Use of DC315 recognized in this report is subject to the following:

2.1 The application of any additional interior finish over the fire-protective coating is limited to interior and exterior latex or waterborne acrylic paints. Additional applications of primers, including vapor retardant coatings, applied under the DC315 fire-protective coating is acceptable and shall be applied where noted in the tested systems listed in [Tables 1](#) and [2](#) of this report.

2.2 Spray Foam Plastic insulation shall be installed in accordance with the manufacturer’s installation instructions.

2.3 Approval of DC315 for use with any insulation product listed herein is conditional upon that insulation products’ current approval for use with DC315. Users must independently verify the current validity of any evaluation report referenced herein.

3.0 PRODUCT USE

3.1 Design

3.1.1 Application as an Alternative Thermal Barrier: DC315 for use as an alternate to the prescriptive thermal barrier required in Section 2603.4 of the IBC and Section R316.4 of the IRC shall be applied at the minimum thickness as shown in Table 1 of this report.

3.1.2 Application as an Alternative Ignition Barrier: DC315 for use as an alternate to the prescriptive ignition barrier required in Section 2603.4.1.6 of the IBC and item 3 of Sections R316.5.3 and R316.5.4 of the IRC shall be applied at the minimum thickness as shown in [Table 2](#) of this report.

3.1.3 Interior Finish: The foam plastic insulation with DC315 coating installed as shown in [Tables 1](#) and [2](#) of this report meets the requirements for interior finish in IBC Section 803.1 and IRC Section R302.9, and may be left exposed to the interior of the building. The combinations shown in [Table 1](#) have been tested in accordance with NFPA 286 and have met the acceptance criteria of IBC Section 803.1.2.1, qualifying the assembly to be used where a Class A classification in accordance with ASTM E84 or UL723 is required as applicable to Sections 803.1.1 and 803.11 of the IBC (Sections 803.1.1 and 803.9 of the 2012 IBC).

3.1.4 Use as an interior finish or interior trim in plenums: Foam plastic insulations installed as shown in Table 1 of this report have been evaluated for use as an interior finish or interior trim in plenums as required by Section 2603.7 of the IBC and shall exhibit a flame spread index of 75 or less and a smoke-developed index of 450 or less when tested in accordance with ASTM E84 and meets the acceptance criteria of Section 803.1.2 of the IBC when tested to NFPA 286.

3.2 Application

3.2.1 General: DC315 shall be applied in accordance with International Fireproof Technology’s installation instructions, the spray foam plastic manufacturer’s installation instructions, this evaluation report and the applicable codes listed in Section 1.0 of this report. Where conflicts occur, the more restrictive governs. The manufacturer’s published installation instructions and this report shall be available and strictly adhered to at all times at the jobsite during application.

3.2.2 Application: The minimum installed thickness of DC315 shall be applied to the applicable foam plastic insulation as shown in [Table 1](#) or [Table 2](#) of this report, as applicable. Before application of DC315, the foam plastic

The product described in this Uniform Evaluation Service (UES) Report has been evaluated as an alternative material, design or method of construction in order to satisfy and comply with the intent of the provision of the code, as noted in this report, and for at least equivalence to that prescribed in the code in quality, strength, effectiveness, fire resistance, durability and safety, as applicable, in accordance with IBC Section 104.11. This document shall only be reproduced in its entirety.






insulation shall be allowed to cool and cure a minimum of one hour or as required by the foam plastic manufacturer, as applicable. The surface of the foam plastic shall be clean, firm and dry before application. DC315 shall be thoroughly mixed before application.

4.0 PRODUCT DESCRIPTION

DC315 intumescent coating is manufactured by International Fireproof Technology, Inc. and International Carbide Technology. The coating is water-based and supplied in 5-gallon (18.9 L) pails weighing 58 lbs. (26.3 kg) and 55-gallon (208 L) drums weighing 640 lbs. (290 kg). The coating material has a maximum shelf life of 12 months when stored in factory-sealed containers at temperatures between 50°F and 90°F (10°C and 32°C). DC315 has a minimum 24-hour curing time.

5.0 IDENTIFICATION

DC315 pails and drums are identified by the International Carbide Technology or International Fireproof Technology name and address, product name (DC315), date of manufacture, product shelf life, conditions for storage and evaluation report number (ER-499). The container identification also includes the IAPMO Uniform Evaluation Service Mark of Conformity. Either Mark of Conformity may be used as shown below:

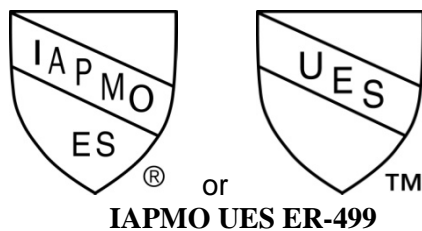

6.0 SUBSTANTIATING DATA

6.1 Manufacturer's descriptive literature and installation instructions. Test results are from laboratories in compliance with ISO/IEC 17025.

6.2 Data in accordance with the ICC-ES Acceptance Criteria for Spray-applied Foam Plastic Insulation, AC377, dated April 2016, including test reports in accordance with Appendix X of AC377.

6.3 Data in accordance with the ICC-ES Acceptance Criteria for Fire-protective Coatings Applied to Spray-applied Foam Plastic Insulation Installed Without a Code-Prescribed Thermal Barrier, AC456, dated October 2015.

6.4 Report of testing in accordance with ASTM E84 Surface Burning Characteristics for Building Materials,

6.5 Report of testing in accordance with NFPA 286 Standard Method of Fire Test for Evaluating Contribution of Wall and Ceiling Interior Finish to Room Fire Growth.

6.6 Report of Testing in accordance with ASTM D2697 Standard Test Method for Volume Nonvolatile Matter in Clear or Pigmented Coatings.

6.7 Report of testing in accordance with ASTM D1475 Standard Test Method for Density of Liquid Coatings, Inks and Related Products.

6.8 Report of testing in accordance with ASTM D2196 Standard Test Methods for Rheological Properties of Non-Newtonian Materials by Rotational Viscometer.

7.0 CONTACT INFORMATION

INTERNATIONAL FIREPROOF TECHNOLOGY, INC.
17528 Von Karman Avenue
Irvine, California 92614
949-975-8588
www.painttoprotect.com

INTERNATIONAL CARBIDE TECHNOLOGY CO, LTD
2F, No. 50, Minquan Road
Lu-Chu District
Taoyuan, Taiwan 33846
886-3-3254301
www.incatech.com.tw

8.0 STATEMENT OF RECOGNITION

This evaluation report describes the results of research carried out by IAPMO Uniform Evaluation Service on DC315 field applied intumescent coatings to the conformance to the codes shown in Section 1.0 of this report and documents the product's certification.

Brian Gerber, P.E., S.E.
Vice President, Technical Operations
Uniform Evaluation Service

Richard Beck, PE, CBO, MCP
Vice President, Uniform Evaluation Service

GP Russ Chaney
CEO, The IAPMO Group

For additional information about this evaluation report please visit www.uniform-es.org or email us at info@uniform-es.org



**TABLE 1
FOAM PLASTIC PRODUCTS APPROVED FOR USE WITH DC315 AS ASSEMBLIES NOT REQUIRING
A PRESCRIPTIVE 15-MINUTE THERMAL BARRIER**

Manufacturer's Name	Product Name	Product Density	Evaluation Report ^{1,2}	Application of DC315			Maximum Thickness of Spray Foam (inches)	
				Minimum Installed Thickness (mils)		Theoretical Application Rate (gallons/100 square feet) ³	Vertical	Overhead
				Wet Film	Dry Film			
Accella Polyurethane Systems dba Bayseal	Bayseal CC	2.0 pcf	ESR-3999	18	12	1.1	7.25	7.25
Accella Polyurethane Systems dba Bayseal	Bayseal CC Polar	2.0 pcf	ESR-3999	18	12	1.1	7.25	7.25
Accella Polyurethane Systems dba Bayseal	Bayseal CC X	2.0 pcf	ER-522	14	9	0.87	5.5	9.5
Accella Polyurethane Systems dba Bayseal	Bayseal CC XP	2.0 pcf	ER-522	14	9	0.87	5.5	9.5
Accella Polyurethane Systems dba Bayseal	Bayseal OC	0.5 pcf	ER-519 ESR-1655	14	9	0.87	8.5	14
Accella Polyurethane Systems dba Bayseal	Bayseal OCX	0.5 pcf	ER-541	4 (Primer) +	3 (Primer) +	0.25 (Primer) +	7.5	11.5
				16 (Finish)	11 (Finish)	1.0 (Finish)		
Accella Polyurethane Systems	EcoBay CC	2.0 pcf	ER-520 ESR-3076	18	12	1.1	7.25	7.25
Accella Polyurethane Systems	EcoBay CC Polar	2.0 pcf	ER-520	18	12	1.1	7.25	7.25
Accella Polyurethane Systems dba Premium Spray Products	Foamsulate 210	2.0 pcf	ER-351	20	13	1.3	8	12
Accella Polyurethane Systems dba Quadrant	NatureSeal OCX	0.5 pcf	ER-285	18	12	1.1	7.5	11.5
Accella Polyurethane Systems dba Premium	Foamsulate™ 220	2.2 pcf	ER-352	14	9	0.87	5.5	9.5
Accella Polyurethane Systems	Foamsulate™ 50	0.5 pcf	ER-351	20	13	1.3	8	11.5



EVALUATION REPORT

Number:

499

Originally Issued: 06/29/2017

Revised: 01/25/2018

Valid Through: 06/30/2018

Manufacturer's Name	Product Name	Product Density	Evaluation Report ^{1, 2}	Application of DC315			Maximum Thickness of Spray Foam (inches)	
				Minimum Installed Thickness (mils)		Theoretical Application Rate (gallons/100 square feet) ³	Vertical	Overhead
				Wet Film	Dry Film			
Accella Polyurethane Systems	Foamsulate™ 50-NIB	0.5 pcf	ER-394	21	14	1.4	8	12
Accella Polyurethane Systems	QuadFoam® 500	0.5 pcf	ER-271	20	13	1.3	8	12
Accella Polyurethane Systems	QuadFoam® 2.0	2.0 pcf	ER-272	14	9	0.87	5.5	9.5
Accella Polyurethane Systems	QuadFoam® NatureSeal 500	0.5 pcf	ER-285	18	12	1.1	7.5	11.5
Accella Polyurethane Systems	NeXGeN® 2.0	2.0 pf	ER-523	18	12	1.1	7.5	11.5
Accella Polyurethane Systems	Sealtite™CC+	1.9 pcf	ER-556	14	9	0.87	5.5	9.5
Accella Polyurethane Systems	Sealtite™OC+	0.75 pcf	ER-557	20	13	1.3	11.5	11.5
Barnhardt Manufacturing Company dba NCFI Polyurethanes	InsulStar	2.0 pcf	ESR-1615	14	9	0.87	5.5	9.5
Barnhardt Manufacturing Company dba NCFI Polyurethanes	InsulBloc®	2.0 pcf	ESR-1615	14	9	0.87	5.5	9.5
Barnhardt Manufacturing Company dba NCFI Polyurethanes	Sealite OCX	0.5 pcf	ESR-3826	18	12	1.1	10	14
BASF Corporation	Enertite® NM	0.5 pcf	CCRR-1032; ESR-3102	14	9	0.87	8.5	14
BASF Corporation	Spraytite 158	2.0 pcf	CCRR 1031; ESR-2642	14	9	0.87	5.5	9.5
BASF Corporation	Spraytite 178	2.1 pcf	CCRR 1031; ESR-2642	4 (Primer) +	3 (Primer) +	0.25 (Primer) +	5.5	11.5
				16 (Finish)	11 (Finish)	1.0 (Finish)		
BASF Corporation	Spraytite 81205	2.0 pcf	CCRR-1031; ESR-2642	14	9	0.87	5.5	9.5
BASF Corporation	Spraytite 81206	2.0 pcf	CCRR-1031; ESR-2642	4 (Primer) +	3 (Primer) +	0.25 (Primer) +	5.5	11.5
				16 (Finish)	11 (Finish)	1.0 (Finish)		
BASF Corporation	Spraytite SP	2.0 pcf	CCRR-1031; ESR-2642	14	9	0.87	5.5	9.5



EVALUATION REPORT

Number:

499

Originally Issued: 06/29/2017

Revised: 01/25/2018

Valid Through: 06/30/2018

Manufacturer's Name	Product Name	Product Density	Evaluation Report ^{1,2}	Application of DC315			Maximum Thickness of Spray Foam (inches)	
				Minimum Installed Thickness (mils)		Theoretical Application Rate (gallons/100 square feet) ³	Vertical	Overhead
				Wet Film	Dry Film			
BASF Corporation	Walltite HP+	2.0 pcf	CCRR-1031; ESR-2642	4 (Primer) +	3 (Primer) +	0.25 (Primer) +	5.5	11.5
				16 (Finish)	11 (Finish)	1.0 (Finish)		
BASF Corporation	Walltite US-N	2.0 pcf	CCRR-1031; ESR-2642	4 (Primer) +	3 (Primer) +	0.25 (Primer) +	5.5	11.5
				16 (Finish)	11 (Finish)	1.0 (Finish)		
BASF Corporation	Walltite US	2.0 pcf	CCRR-1031; ESR-2642	4 (Primer) +	3 (Primer) +	0.25 (Primer) +	5.5	11.5
				16 (Finish)	11 (Finish)	1.0 (Finish)		
Certaiteed	Certaspray CC	2.0 pcf	ESR-3758	14	9	0.87	5.5	9.5
Certaiteed	Certaspray OCX	0.5 pcf	ESR-3759	20	13	1.25	5.25	14
DAP Foam, Inc.	Touch 'n Seal Class 1	2.2 pcf	ESR-3052	20	13	1.3	3.5	3.5
DAP Foam, Inc.	Touch 'n Professional Class 1	2.2 pcf	ESR-3052	20	13	1.3	3.5	3.5
Demilec	HeatLok Agribalance	0.6 pcf	ESR-2600	18	12	1.1	7.5	11.5
Demilec	APX	0.5 pcf	ESR-3470	20	13	1.3	8	10
Demilec	HeatLok Soy 200+	2.0 pcf	ESR-3210	18	12	1.1	7.5	11.5
Demilec	HeatLok XT-S	2.0 pcf	ESR-3824	14	9	0.87	7.5	11.5
Demilec	HeatLok XT-W	2.0 pcf	ESR-3883	18	12	1.1	7.5	11.5
Demilec	HeatLok HFO	2.0 pcf	ESR-4073	14	9	0.87	7.5	11.5
Demilec	Sealection 500	0.5 pcf	CCRR-1063; ESR-1172	18	12	1.1	7.5	11.5
Dow	Styrofoam CM 2045	2.0 pcf	ESR-2670; ESR-1659	4 (primer) + 18 finish	3 (primer) + 12 finish	1.1	9.5	9.5
Elastochem Specialty Chemicals Inc.	Insulthane Extreme	2.0 pcf	ESR-3809	18	12	1.1	7.25	7.25
Elastochem Specialty Chemicals Inc.	Insulthane Proline Plus	2.0 pcf	ESR-3541	18	12	1.1	7.25	7.25
Energy One America	EOA 2000	2.0 pcf	ER-443	18	12	1.1	8.25	10.25



EVALUATION REPORT

Number:

499

Originally Issued: 06/29/2017

Revised: 01/25/2018

Valid Through: 06/30/2018

Manufacturer's Name	Product Name	Product Density	Evaluation Report ^{1, 2}	Application of DC315			Maximum Thickness of Spray Foam (inches)	
				Minimum Installed Thickness (mils)		Theoretical Application Rate (gallons/100 square feet) ³	Vertical	Overhead
				Wet Film	Dry Film			
Gaco Western	F1850	2.0 pcf	CCRR-1043	14	9	0.87	5.5	9.5
Gaco Western	183M	2.0 pcf	CCRR-1002	20	13	1.3	5.5	7.5
Gaco Western	Gaco Green 052N	0.5 pcf	CCRR-1075; ESR-2478	20	13	1.3	11.25	11.25
Gaco Western	Gaco Firestop2 F5001	0.5 pcf	CCRR-1009	18	12	1.1	18	18
General Coatings Manf. Corp.	Ultrathane 230	2.0 pcf	ESR-3033	4 (primer) + 18 finish	3 (primer) + 12 finish	1.1	5.5	7.5
Henry Company	Permax 1.8 (RT 2045 1.8)	1.8 pcf	ESR-3024	21	14	1.3	11.25	11.25
Henry Company	Permax 2.0 (RT 2045 2.0)	2.0 pcf	ESR-3024	21	14	1.3	11.25	11.25
Henry Company	Permax 2.0X Fast	2.0 pcf	ESR-3647	18	12	1.3	7.25	7.25
Henry Company	Permax 2.0X	2.0 pcf	ESR-3647	18	12	1.3	7.25	7.25
Henry Company	Permax 0.5LV	0.5 pcf	ESR-3646	18	12	1.3	11.5	11.5
ICP Adhesive and Sealants	Handi-foam E84 Class 1	2.0 pcf	ESR-2717	20	13	1.3	3.5	3.5
Icynene, Inc.	Classic Plus	0.7 pcf	ESR-1826	14	9	0.87	8.5	14
Icynene, Inc.	Classic	0.5 pcf	ESR-1826	20	13	1.3	6	14
Icynene, Inc.	Classic Max Select	0.5 pcf	ESR-1826	20	13	1.3	6	14
Icynene, Inc.	MD-C-200	2.4 pcf	ESR-3199	22	14	1.5	6	10
Icynene, Inc.	ProSeal	2.0 pcf	ESR-3500	14	9	0.87	5.5	9.5
Icynene, Inc.	ProSeal LE	2.0 pcf	ESR-3500	14	9	0.87	5.5	9.5
Johns Manville	JM Corbond® III Performance Insulation	2.0 pcf	ER-146	14	9	0.87	5.5	9.5
Johns Manville	JM Corbond® ocx SPF	0.5 pcf	ER-372 ; ESR-3777	18	12	1	7.5	11.5
Johns Manville	JM Corbond® MCS	2.0 pcf	ESR-3159	22	14	1.4	7.25	9.25



EVALUATION REPORT

Number:

499

Originally Issued: 06/29/2017

Revised: 01/25/2018

Valid Through: 06/30/2018

Manufacturer's Name	Product Name	Product Density	Evaluation Report ^{1,2}	Application of DC315			Maximum Thickness of Spray Foam (inches)	
				Minimum Installed Thickness (mils)		Theoretical Application Rate (gallons/100 square feet) ³	Vertical	Overhead
				Wet Film	Dry Film			
Johns Manville	JM Corbond [®] oc	0.5 pcf	ESR-3776	18	12	1.1	7.5	11.5
LaPolla Industries	FL500	0.5 pcf	ESR-2847	14	9	0.87	8.5	14
LaPolla Industries	FLX-500	0.5 pcf	ER-401	16	11	1	7.5	11.5
Lapolla Industries	FoamLok FL2000-4G	2.0 pcf	CCRR-1025	14	9	0.87	5.5	9.5
LaPolla Industries	FL 2000	2.0 pcf	ESR-2629	14	9	0.87	5.5	9.5
Natural Polymers, LLC	Natural-Therm [®] 0.50 pcf	0.5 pcf	ER-336	21	14	1.4	8	12
Natural Polymers, LLC	Natural-Therm [®] 2.0 IBW	2.0 pcf	ER-336	21	14	1.4	7.5	11.5
Natural Polymers, LLC	Natural-Therm [®] 2.0 IBS	2.0 pcf	ER-336	21	14	1.4	7.5	11.5
Natural Polymers, LLC	Natural-Therm [®] 2.0 W	2.0 pcf	ESR-3136	21	14	1.4	11.25	11.25
NuWool Company Incorporated	Nu-Seal 0.5	0.5 pcf	ESR-3136	20	14	1.3	8	10
NuWool Company Incorporated	Nu-Seal 2.0W	2.0 pcf	ESR-3136	21	14	1.3	11.25	11.25
Patriot Spray Foam, Inc.	Patriot 200	2.0 pcf	ESR-4065	14	9	0.87	5.5	9.5
Patriot Spray Foam, Inc.	Patriot 200 ECO	2.0 pcf	ESR-4063	22	15	1.4	8	10
Patriot Spray Foam, Inc.	Patriot 500	0.5 pcf	ESR-4064	20	13	1.3	6	14
Patriot Spray Foam, Inc.	Patriot 500 HY	0.5 pcf	ESR-4064	20	13	1.3	6	14
Profoam	Proseal 2.0	2.0 pcf	ESR-3835	21	14	1.3	5.5	5.5
Rhino Linings.	ThermalGuard OC.5	0.5 pcf	ESR-2100	18	13	1.1	7.5	11.5
Rhino Linings	Thermal Guard CC2	2.0 pcf	ESR-2100	14	9	0.87	5.5	9.5
SES Foam, LLC	Nexseal 2.0	2.0 pcf	ER-374	14	9	0.87	5.5	9.5
SES Foam, LLC	Nexseal 2.0 LE	2.0 pc	ER-374	14	9	0.87	5.5	9.5



EVALUATION REPORT

Number:

499

Originally Issued: 06/29/2017

Revised: 01/25/2018

Valid Through: 06/30/2018

Manufacturer's Name	Product Name	Product Density	Evaluation Report ^{1,2}	Application of DC315			Maximum Thickness of Spray Foam (inches)	
				Minimum Installed Thickness (mils)		Theoretical Application Rate (gallons/100 square feet) ³	Vertical	Overhead
				Wet Film	Dry Film			
SES Foam, LLC	SES 2.0	2.0 pcf	ER-374	14	9	0.87	5.5	9.5
SES Foam, LLC	SES 2.0 LE	2.0 pcf	ER-374	14	9	0.87	5.5	9.5
SES Foam, LLC	SES Foam 0.5	0.5 pcf	ER-492	14	9	0.87	8.5	14
SES Foam, LLC	SucraSeal 0.5	0.5 pcf	ESR-3375	18	12	1.1	11.5	11.5
Sustainable Polymer Products	2.0 CC	2.0 pcf	ER-511	18	12	1.1	7.5	11.5
Sustainable Polymer Products	0.5 OCX	0.5 pcf	ER-512	20	13	1.3	7.5	11.5
Sustainable Polymer Products	.50 OC	0.5 pcf	ER-513	20	13	1.3	8	11.5
SWD Urethane	Quik-Shield 106	0.5 pcf	CCCR-1011	24	15	1.5	11.25	11.25
SWD Urethane	Quik-Shield 108	0.5 pcf	CCRR-1051	14	9	0.87	8.5	14
SWD Urethane	Quik-Shield 100X	0.5 pcf	CCRR-1050	18	12	1.1	7.25	11.25
SWD Urethane	Quik-Shield 112	2.0 pcf	CCRR-1011	4 (primer) + 22 finish	3 (primer) + 15 finish	1.7	11.25	11.25
SWD Urethane	Quik-Shield 112XC	2.0 pcf	CCRR-1011	14	9	0.87	5.5	9.5
SWD Urethane	Quik-Shield 118	2.0 pcf	CCRR-1093	14	9	0.87	5.5	9.5
UTC	7041 0.5 lb	0.5 pcf	ESR-3244	20	13	1.3	5.5	14.75
UTC	7040 0.5 lb	0.5 pcf	ESR-3244	20	13	1.3	5.5	14.75
Volatile Free, Inc.	VFI-716	0.5 pcf	ER-414	20	13	1.3	8	11.5
Volatile Free, Inc.	VFI-714	2.2 pcf	ER-415	18	12	1.1	7.5	11.5
XtremeSeal, LLC	XtremeSeal 2.0 LE	2.0	ER-537	18	12	1.1	8.25	10.25
XtremeSeal, LLC	XtremeSeal 0.5 LX	0.5	ER-538	18	12	1.1	10	12

For SI: 1mil = 0.0254 mm, 1 inch = 25.4 mm, 1 pcf = 16.02 kg/m³

Notes:

- Approval of DC315 for use with any insulation product listed herein is conditional upon that insulation product's current approval for use with DC315. Users must independently verify the current validity of any evaluation report referenced herein.
- ER – Evaluation Reports from IAPMO Uniform Evaluation Service
CCRR – Code Compliance Research Reports from Intertek.
ESR – Evaluation Service Reports from ICC-ES.
- Theoretical coating application rates are based strictly on minimum wet film thickness requirements and shall be increased for site-specific conditions such as foam plastic surface texture, overspray loss, container and other residues, application technique and environmental conditions.



**TABLE 2
FOAM PLASTIC PRODUCTS APPROVED FOR USE WITH DC315 AS ASSEMBLIES NOT REQUIRING
A PRESCRIPTIVE IGNITION BARRIER**

Manufacturer's Name	Product Name	Product Density	Evaluation Report ^{1, 2}	Application of DC315			Maximum Thickness of Spray Foam (inches)	
				Minimum Installed Thickness (mils)		Theoretical Application Rate per Gallon (square feet) ³	Vertical	Overhead
				Wet Film	Dry Film			
Accella Polyurethane Systems	Bayseal OC 0.5 lb	0.5 pcf	ESR-1655	4	3	400	9.5	11.5
Accella Polyurethane Systems	Foamsulate 220	2.0 pcf	ER-352	4	3	400	7.5	11.5
Accella Polyurethane Systems	QuadFoam® 500	0.5 pcf	ER-271	4	3	400	7.5	11.5
Accella Polyurethane Systems	Foamsulate™ 50	0.5 pcf	ER-351	4	3	400	7.5	11.5
Accella Polyurethane Systems	Foamsulate™ 50-HY	0.5 pcf	ER-540	4	3	400	7.5	11.5
Accella Polyurethane Systems	Sealtite™OC+	0.75 pcf	ER-557	4	3	400	14	14
BASF	158 Spraytite	2.0 pcf	ESR-2642	4	3	400	5.5	11.5
BASF	Enertite	0.5 pcf	ESR-3102	4	3	400	11.5	15.5
BASF	Spraytite 178	2.0 pcf	ESR-2642	4	3	400	5.5	11.5
BASF	Spraytite 81206	2.0 pcf	ESR-2642	4	3	400	5.5	11.5
BASF	Spraytite 81205	2.0 pcf	ESR-2642	4	3	400	5.5	11.5
BASF	Spraytite SP	2.0 pcf	ESR-2642	4	3	400	5.5	11.5
BASF	Walltite US	2.0 pcf	ESR-2642	4	3	400	5.5	11.5
BASF	Walltite US-N	2.0 pcf	ESR-2642	4	3	400	5.5	11.5
BASF	Walltite HP+	2.0 pcf	ESR-2642	4	3	400	5.5	11.5
Certainteed	CertaSpray X	0.5 pcf	ESR-3759	4	3	400	11.5	11.5
Demilec	Agribalance	0.6-0.8 pcf	ESR-2600	4	3	400	7.5	11.5
Demilec	Heatlok XT-w	2.0 pcf	ESR-3883	4	3	400	7.5	11.5



EVALUATION REPORT

Number:

499

Originally Issued: 06/29/2017

Revised: 01/25/2018

Valid Through: 06/30/2018

Manufacturer's Name	Product Name	Product Density	Evaluation Report ^{1,2}	Application of DC315			Maximum Thickness of Spray Foam (inches)	
				Minimum Installed Thickness (mils)		Theoretical Application Rate per Gallon (square feet) ³	Vertical	Overhead
				Wet Film	Dry Film			
Demilec	Sealection 500	0.5 pcf	ESR-1172	4	3	400	7.5	11.5
Energy One America	EOA 2000	2.0 pcf	ER-443	4	3	400	7.5	11.5
Gaco Western	Gaco Green 052N	0.5 pcf	CCRR-1075; ESR-2478	4	3	400	11.25	11.25
General Coatings	Ultra-Thane 230	2.0 pcf	ESR-3033	4	3	400	7.5	11.5
Henry	Permax LV	0.5 pcf	ESR-3646	4	3	400	11.5	11.5
Icynene, Inc.	Classic Plus	0.7 pcf	ESR-1826	4	3	400	8	14
Icynene, Inc.	Classic	0.5 pcf	ESR-1826	4	3	400	5.5	11.25
Icynene, Inc.	Classic Max Select	0.5 pcf	ESR-1826	4	3	400	5.5	11.25
Icynene, Inc	ProSeal	2.0 pcf	ESR-3500	4	3	400	8	14
Icynene, Inc	ProSeal LE	2.0 pcf	ESR-3500	4	3	400	8	14
Johns Manville	JM Corbond [®] III Performance Insulation	2.0 pcf	ER-146	4	3	400	7.5	11.5
LaPolla	FL500	0.5 pcf	ESR-2847	4	3	400	5.5	11.5
NCFI	Sealite	0.5 pcf	ESR-1154	4	3	400	12	14
Natural Polymers, LLC	Natural-Therm [®] Zero	1.9 pcf	ER-527	4	3	400	7.5	11.5
Patriot	200	2.0 pcf	ESR-4065	4	3	400	8	14
Patriot	500	0.5 pcf	ESR-4064	4	3	400	5.5	11.25
Patriot	500 HY	0.5 pcf	ESR-4064	4	3	400	5.5	11.25
Rhino Linings	ThermoGuard	0.5 pcf	ESR-2100	4	3	400	8	12
SES Foam, LLC	SES 0.5	0.5 pcf	ER-492	4	3	400	9.5	11.5
Sustainable Polymer Products	.50 OC HY	0.5 pcf	ER-514	4	3	400	7.5	11.5
Sustainable Polymer Products	2 lb. CC	2.0 pcf	ER-511	4	3	400	7.5	11.5



EVALUATION REPORT

Number: **499**

Originally Issued: 06/29/2017

Revised: 01/25/2018

Valid Through: 06/30/2018

Manufacturer's Name	Product Name	Product Density	Evaluation Report ^{1, 2}	Application of DC315			Maximum Thickness of Spray Foam (inches)	
				Minimum Installed Thickness (mils)		Theoretical Application Rate per Gallon (square feet) ³	Vertical	Overhead
				Wet Film	Dry Film			
Sustainable Polymer Products	.50 lb OCX	0.5 pcf	ER-512	4	3	400	7.5	11.5
SWD	QS 108	0.5 pcf	CCRR-1051	4	3	400	8	12

For SI: 1mil = 0.0254 mm, 1 inch = 25.4 mm, 1 pcf = 16.02 kg/m³

Notes:

1. Approval of DC315 for use with any insulation product listed herein is conditional upon that insulation products' current approval for use with DC315. Users must independently verify the current validity of any evaluation report referenced herein.
2. ER – Evaluation Reports from IAPMO Uniform Evaluation Service
CCRR – Code Compliance Research Reports from Intertek.
ESR – Evaluation Service Reports from ICC-ES.
3. Theoretical coating application rates are based strictly on minimum wet film thickness requirements and shall be increased for sit-specific conditions such as foam plastic surface texture, overspray loss, container and other residues, application technique and environmental conditions.